LITEON

Service Manual

15-inch LCD Monitor
H15AAU/R

Service Manual Versions and Revision

No.	Version	Release Date	Revision
1.	1.0	Jan. 31, 2002	Original release

Copyright

Copyright 2002 LiteOn Technology Corp.

All Rights Reserved

This manual may not, in whole or in part, be copied, photocopied, reproduced, translated, or converted to any electronic or machine readable form without prior written permission of LiteOn Technology Corp.

H15AAU / H15AAR Service Manual.

Printed in Taiwan.

Trademarks

LiteOn is a registered trademark of LiteOn Technology Corp.

All other trademarks are the property of their respective owners.

Table of Contents

1. Audio circuit ---- 1

1.1 Audio input ---- 1

1.2 Audio output ---- 1

2. Power supply ---- 1

3. On-screen circuit ---- 2

4. Video input circuit ---- 2

5. Definition converter LSI peripheral circuit ---- 2

6. System reset, LED control circuit ---- 2

7. E^2PROM for PNP ---- 2

8. E^2PROM ---- 3

9. CPU circuit ---- 3

9.1 Dection of POWER switch status ---- 3

9.2 Display mode identification ---- 3

9.3 User control ---- 4

9.4 Control of identification converter LSI ---- 5

9.5 I^2C bus control ---- 5

9.6 Power ON sequence ---- 6

9.7 Power OFF sequence ---- 7

10. Inverter ---- 8

1. Audio circuit (Circuit diagrams Main PWB)

1.1 Audio input

The audio signal input received from the audio input terminal (JK011) is applied to the amplifier I001 of 4 (L-CH) and 9 (R-CH) through the low-pass filter consisting of R040, R041, R042, R043, C040 and C041.

In this amplifier, controls of Volume and mute are conducted. The audio signal controlled at the pin 6 determines the attenuation of output of the amplifiers. Since then, the signal is output to the jack P003.

1.2 Audio output

The audio signal is output from P002 output terminal of the Audio block to the internal speaker system.

2. Power supply (Circuit daigrams MAIN PWB)

2.1 Line filter consists of C801, T801, C802, C803, C804. It eliminates high frequency interference to meet EMI's requirement.

2.2 Rec & Filter :

Bridge diode D801 converts AC source into pulsed DC. This pulsed DC is smoothed and filtered by C805.

R802 is an NTC (negative thermal coefficient) resistor, used to reduce inrush current to be within safe range.

2.3 Power transformer :

T802 converts energy for square wave from power source C805 to secondary side to generate +12V and +5V.

2.4 Output :

The square wave from T802 is rectified by D809, D810, then filtered by C817, C822 to generate +12V and +5V respectively.

2.4.1 A 5V power supply for LCD module, CPU and logic is generated from the power source.

2.4.2 I308 : 3-terminal regulator

A 3.3V power supply for I306 analog is generated from the 5V source.

2.4.3 I308 : 3-terminal regulator

A 3.3V power supply for I306 digital is generated from the 5V source.

Q302, Q303 ON/OFF control for LCD Module

ON/OFF control is performed for power ON/OFF and also for the power saving sequence.

2.5 Driver :

Q803 drive T802 from PWM control of I801 for power converted.

2.6 FB :

Negative feedback CKT consists of photo coupler I802 and adjustable regulator I803. It can maintain output voltages +5V and +12V at a stable level.

2.7 PWM :

2.7.1 *Start* : When power is turned on, Q801 conducts due to bias from C805 and R805,R803. C807 is charged a 16 volt and a starting current about 0.3mA to pin 7 of I801. I801 starts to oscillate and outputs a pulse train through pin 6 to drive Q803.

2.7.2 *OPP* : When Q803 turns on, C805 supplies a linearly increasing triangle current through the primary induc tance of T802 to the driver Q803, once the peak value of this current multiplied by R811 exceeds1 volt, pulse train will be shut down immediately to protect Q803, T802 from being burned out.

2.7.3 *Regulation* : If output voltage +5V goes up, the R terminal of I803 gets more bias, accordingly photo transis tor and photo diode flows more current. The voltage of pin 2 goes up too, making the pulse width of pin 6 to become narrower. So the output voltage +5V will be pulled down to a stable value.

2.7.4 *OVP* : If +5V goes up too much, the induced voltage on pin 4 of T802 becomes large also. Suppose that it is over 18 volts, ZD801 conducts, pin 3 of I801 is pulled up over 1 volt. The pulse train at pin 6 goes down to zero, shutting Q803 off immediately.

2.7.5 *SCP* : If output terminal is short to ground, photo transistor does not conduct, hence Q806 does not conduct either. Then oscillation of I801 is stop, shutting Q803 off immediately.

H15AAU / H15AAR Power Board Block Diagram

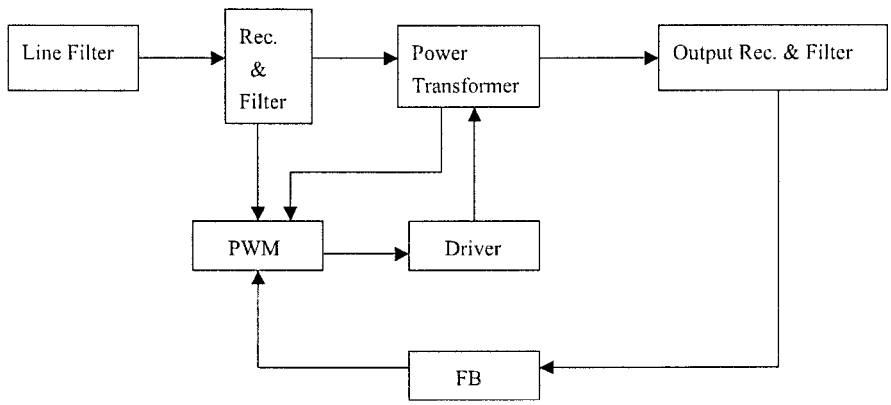

3. On-screen circuit (Circuit diagrams Main PWB)

I300 Embeded function.

On-screen menu screen is established and the resultant data are output from I300 (Circuit diagram MAIN PWB).

4. Video input circuit (Circuit diagram MAIN PWB)

The AC-coupled video signal is used to clamp the black level at 0V).

5. Definition converter LSI peripheral circuit (Circuit diagram MAIN PWB)

I301 MRT V2 gmZAN1 is the definition A/D converter LSI.

The analog R, G, B signal input entered from the video input circuit is converted into the digital data of video signal through the incorporated A/D converter. Based on this conversion, this device performs interpolation during pixel extension. The source voltage for this device is 3.3V and the system clock frequency is 12MHz. The withstand voltage level for the input signal voltage is 3.3V and 5V.

6. System reset, LED control circuit (Circuit diagram MAIN PWB)

6.1 System reset

System reset is performed by detecting the rising and falling of the 5V source voltage at I302.

6.2 LED control circuit

Green / amber is lit with the control signal of the LED GREEN and LED AMBER signal pin 43, 42 from I303 (Circuit diagram MAIN PWB).

7. E²PROM for PnP (Circuit diagram MAIN PWB)

8. E²PROM (Circuit diagram MAIN PWB)

Data transfer between I304 and CPU (Circuit diagram MAIN PWB page 4/7 (I303) is effected through the IIC bus SCL (pin 9) and SDA (pin 8) of I300 or SCL (pin 42) and SDA pin 39 of I301. The data to be transferred to each device are stored in I304.

- I300 control data.
- OSD related setting data.
- Other control data for service menu.

9. CPU circuit (Circuit diagram MAIN PWB)

I303 (MTV312M64) (SM89516C25) or (W78E62BP-40) functions as the CPU.

The source voltage for the device is 5.0V and the system clock frequency is 12MHz.

9.1 Detection of POWER switch status

The CPU identifies the ON status of the two power supplies. The identification is made when the power supply is turned off. For example, if the power supply is turned off with the POWER switch, the POWER switch must be turned on when activating the power supply again. If the power supply is turned off by pulling out the power cord, then this power supply can be turned on by connecting the power cord, without pressing the POWER switch.

9.2 Display mode identification

9.2.1 Functions

(1) Display mode identification

- The display mode of input signal is identified based on Table 1, and according to the frequency and polarity (HPOL, VPOL) of horizontal or vertical sync signal, presence of the horizontal or vertical sync signal, and the discrimination signal (HSYNC_DETECT, VSYNC_DETECT).
- When the mode has been identified through the measurement of horizontal and vertical frequencies, the total number of lines is determined with a formula of " Horizontal frequency / Vertical frequency = Total number of lines. "Final identification can be made by examining the coincidence of the obtained figure with the number of lines for the mode identified from the frequency.
- When the detected frequency if the sync signal has changed, the total number of lines should be counted even through it is rge identified frequency in the same mode. Then, it is necessary to examine whether the preset value for the vertical display position of Item 4-3 has exceeded the total number of lines. If exceeded, a maximum value should be set up, which does not exceed the vertical display position of Item 4-3.

(2) Out-of -range

This out-of-range mode is assumed when the frequency of the horizontal / vertical signal is as specified below.

- Vertical frequency : Below 50Hz or above 85Hz
- Horizontal frequency : Below 24 KHz or above 75 KHz

(3) Power save mode

The power save mode is assumed when the horizontal / vertical signals are as specified below.

- If there is no horizontal sync signal input.
- If there is no vertical sync signal input.
- If the horizontal sync signal is outside the measuring range of I300.
- If the vertical sync signal is outside the measuring range of I300.

Table 1

Mode	No	Resolution	H-freq (KHz)	Band Width (MHz)	Polarity	
					H	V
1.	247	VGA 720 x 350 70Hz	31.47	28.322	+	-
2.	102	VGA 720 x 400 70Hz	31.47	28.322	-	+
3.	103	VGA 640 x 480 60Hz	31.47	25.175	-	-
4.	182	MAC 640 x 480 66Hz	35	32.24	-	-
5.	173	VESA 640 X 480 72Hz	37.86	31.5	-	-
6.	109	VESA 640 X 480 75Hz	37.5	31.5	-	-
7.	104	VESA 800 x 600 56Hz	35.16	36	+	+
8.	116	VESA 800 x 600 60Hz	37.88	40	+	+
9.	110	VESA 800 x 600 75Hz	46.88	49.5	+	+
10.	117	VESA 800 x 600 72Hz	48.08	50	+	+
11.	108	MAC 832 x 624 75Hz	49.72	57.283	-	-
12.	118	VESA 1024 x 768 60Hz	48.36	65	-	-
13.	217	SUN 1024 x 768 65Hz	52.45	70.49	-	-
14.	157	VESA 1024 x 768 70Hz	56.48	75	-	-
15.	141	VESA 1024 x 768 75Hz	60.02	78.75	+	+

Attention :

1. When resolution beyond 1024 x 768 is inputted, resolution is lowered with Down scaling to 1024 x 768, and indicated, and OSD should indicate OUT of Range.

9.3 User Control

9.3.1 Related ports of I303

Port	Pin No.	I/O	Signal name	Function	Remarks
P1.5	7	I	POWER	Power switch input	Power ON , OFF control
P1.1	3	I	DOWN	▼ switch input	(▼) key
P1.0	2	I	UP	▲ switch input	(▲) key
P1.3	5	I	-	- switch input	(-) key
P1.2	4	I	+	+ switch input	(+) key

9.3.2 Functions

Control is effected for the push-switches to be used when the user changes the parameters, in order to modify the respective setting values. Whether the switch has been pressed is identified with the switch input level that is turned "L".

Each switch input port is pulled up at outside of ASIC.

Each parameter is stored in the EEPROM, the contents of which are updated as required.

9.4 Control of definition converter LSI I300.

9.4.1 Ports related to control

Pin No.	I/O	Signal name	Function
159	I	IRQ	interrupt signal
5	I/O	SCL	serial clock
6	I/O	SDA	serial data

9.4.2 Functions

Major function of I300 are as follows:

(1) Expansion of the display screen.

(2) Timing control for various signal types.

(3) Power-supply sequence (LCD panel).

9.5 I^2C bus control

9.5.1 Related ports of I303

Port	Pin No.	I/O	Signal name	Function
P1.7	14	O	SCL	IIC bus clock
P1.6	13	I/O	SDA	IIC bus data

9.5.2 I^2C-controlled functions

The following functional controls are effected by I^2C.

(1) Control of EEPROM I304 for parameter setting.

9.6 Power ON sequence

When the POWER switch is pressed, the POWER OFF signal is turned "H". When this "H" potential is detected, the CPU begins to establish the respective power supplies according to the sequence shown below.

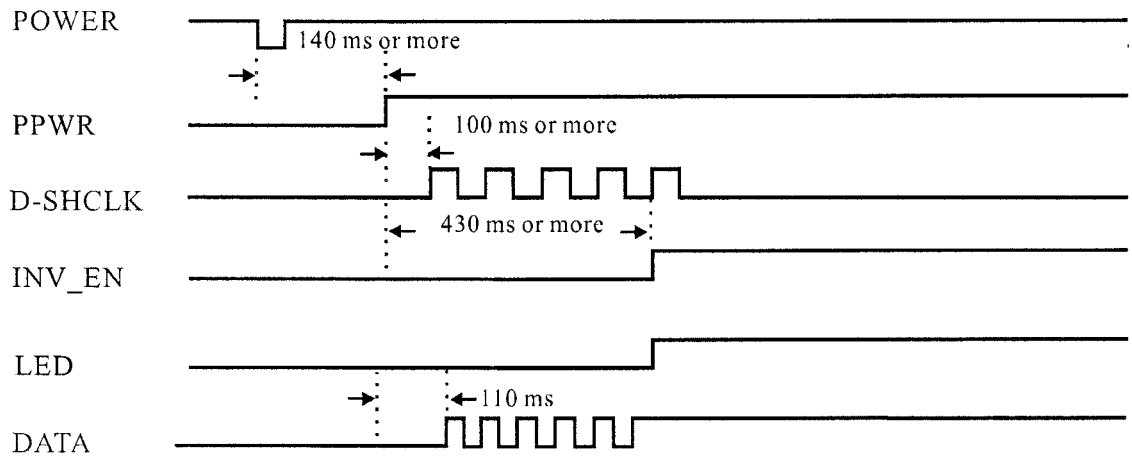

9.7 Power OFF sequence

When the POWER switch is pressed while the power supply is ON, the POWER ON signal is turned "H". When tshown below.his "H" potential is detected, the CPU begins to turn off the respective power supplies according to the sequence

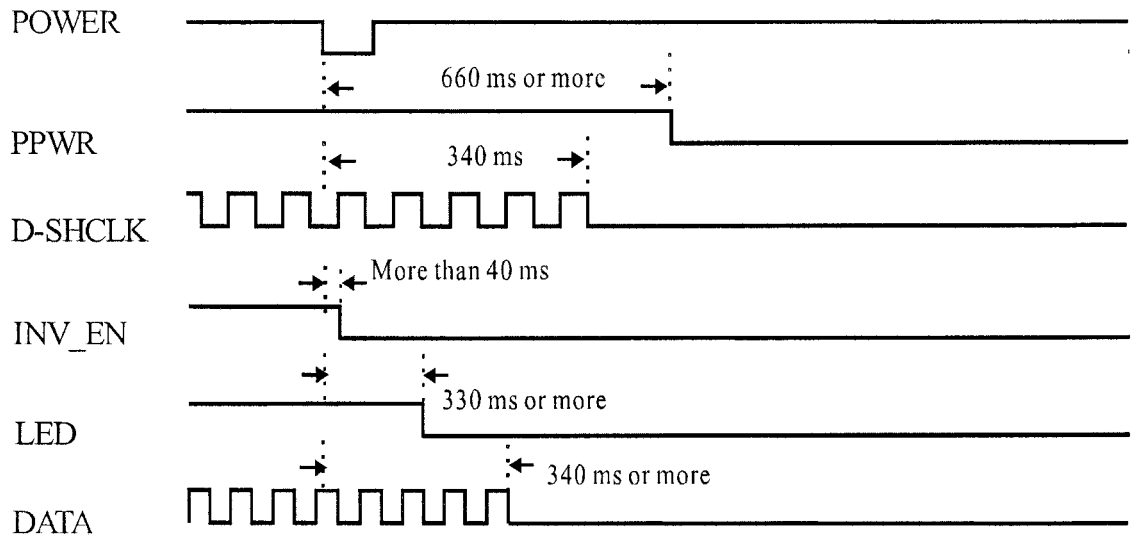

10. Inverter

This unit operates on an output voltage of 15V from power source.

10.1 Regulator: Q101 get a +5VDC for I102 power supply.

10.2 UVP: Q106 turns off when the Vin is under 14V. Then pin 3 of I102 is pulled low and inverter off immediately. That is the under voltage protection.

10.3 Control IC: I102 (OZ960S)

10.3.1 Enable : When pin 3 of I102 is over 1.5V, I102 works. If it is under 1.5V, I102 turns off.

10.3.2 OSC: When I102 enabled, R108/C115 (pin 17/pin18 of I102) determine the operating frequency.

10.3.3 SST: C104 (pin 4 of I102) provides soft start function.

10.3.4 Ignition: R109 (pin 8 of I102) provides higher operating frequency for more striking voltage until regulation of feedback of lamp current. C103 (pin 1 of I102) determine the striking time.

10.3.5 Dimming control: The divided voltage of R106/R105/R104 control the duty pulse of burst-mode to drive Q105 and perform a wide dimming control for the CCFL. The burst-mode frequency is determined by C116.

10.3.6 Regulation: Pin 9/pin 10 of I102 provide regulation of the CCFL current from feedback. The non-inverting reference (pin 10 of I102) is at 1.25V nominal.

10.3.7 Protection: Open-lamp protection in the ignition period is provided through both pin1 and pin 2 of I102. Removal of the CCFL during normal operation will trigger Q104 to turns on and shuts off the inverter. This is latch function.

10.3.8 Output drivers: The configuration prevents any shoot-through issue associated with bridge-type power conversion applications. Adjusting the overlap conduction between I101 P-MOSFET and I103 N-MOSFET, I101 N-MOSFET and I103 P-MOSFET, the CCFL current regulation is achieved.

10.4 Full-bridge swit ching/Transformer: I101/I103 /C123/C125/T101/T102 compose full-bridge swit ching to convert DC into AC for driver the CCFL.

10.5 Detection: C124/C119/CR102 detect the output voltage and ensure a rated voltage by pin2 of I102. Q102/Q103 ensure not a open-lamp.

10.6 Feedback: CR101/R120/R121/D108 sense the lamp current for negative feedback and regulation. The divided voltage on R121 will be at 1.25V.

Inverter Board Block Diagram

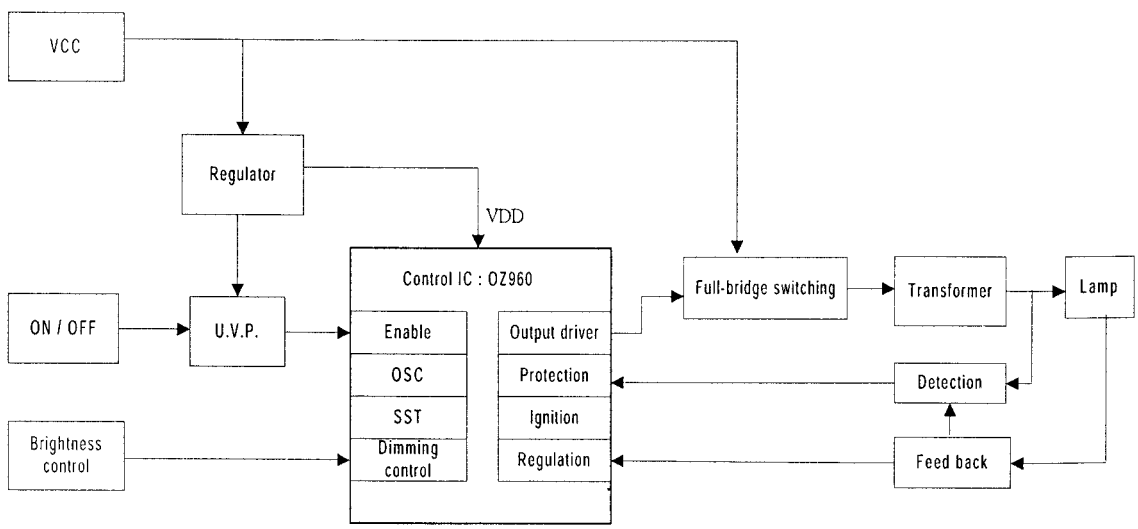

Table of Contents

1. No display of screen (Screen is black, color of LED is amber) ---- 1
2. Nothing displays on screen (Screen is black, color of LED is green) ---- 2
3. Checking the back light unit ---- 5
4. Abnormal screen ---- 6
5. No OSD display ---- 7
6. Abnormal plug and play operation ---- 8
   6.1 Abnormal DDC2 ---- 8
7. Checking the interface circuit of sync signal ---- 9
   7.1 Checking the control circuit of horizontal sync pulse ---- 9
   7.2 Checking the control circuit of vertical sync pulse ---- 9
8. Checking the resolution change IC movement ---- 10
9. No power on ---- 11
   9.1 No power on (I) ---- 11
   9.2 No power on (II) ---- 12
10. Checking the DC/DC converter circuit ---- 13
11. Checking the operation of CPU ---- 14
12. Checking the audio circuit ---- 15
13. Checking inverter board circuit ---- 16

1. No display of screen (Screen is black, color of LED is amber)

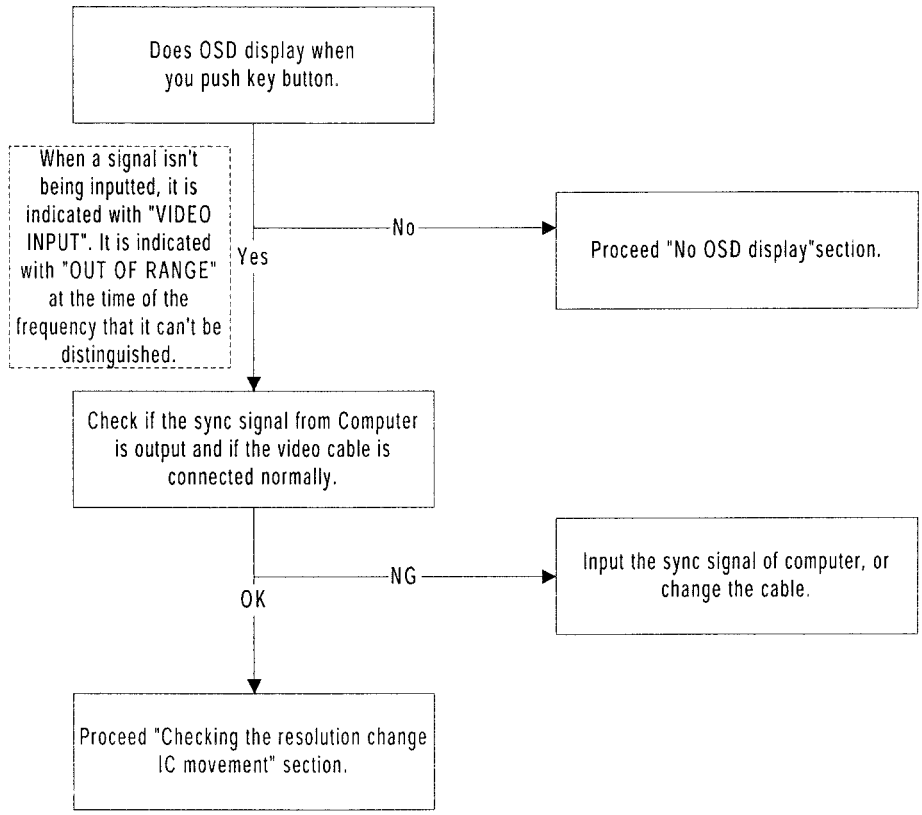
Does OSD display when you push key button.
When a signal isn't being inputted, it is indicated with "VIDEO INPUT". It is indicated with "OUT OF RANGE" at the time of the frequency that it can't be distinguished.
No
Proceed "No OSD display"section.
Yes
Check if the sync signal from Computer is output and if the video cable is connected normally.
NG
Input the sync signal of computer, or change the cable.
OK
Proceed "Checking the resolution change IC movement" section.

2. Nothing displays on screen (Screen is black, color of LED is green)

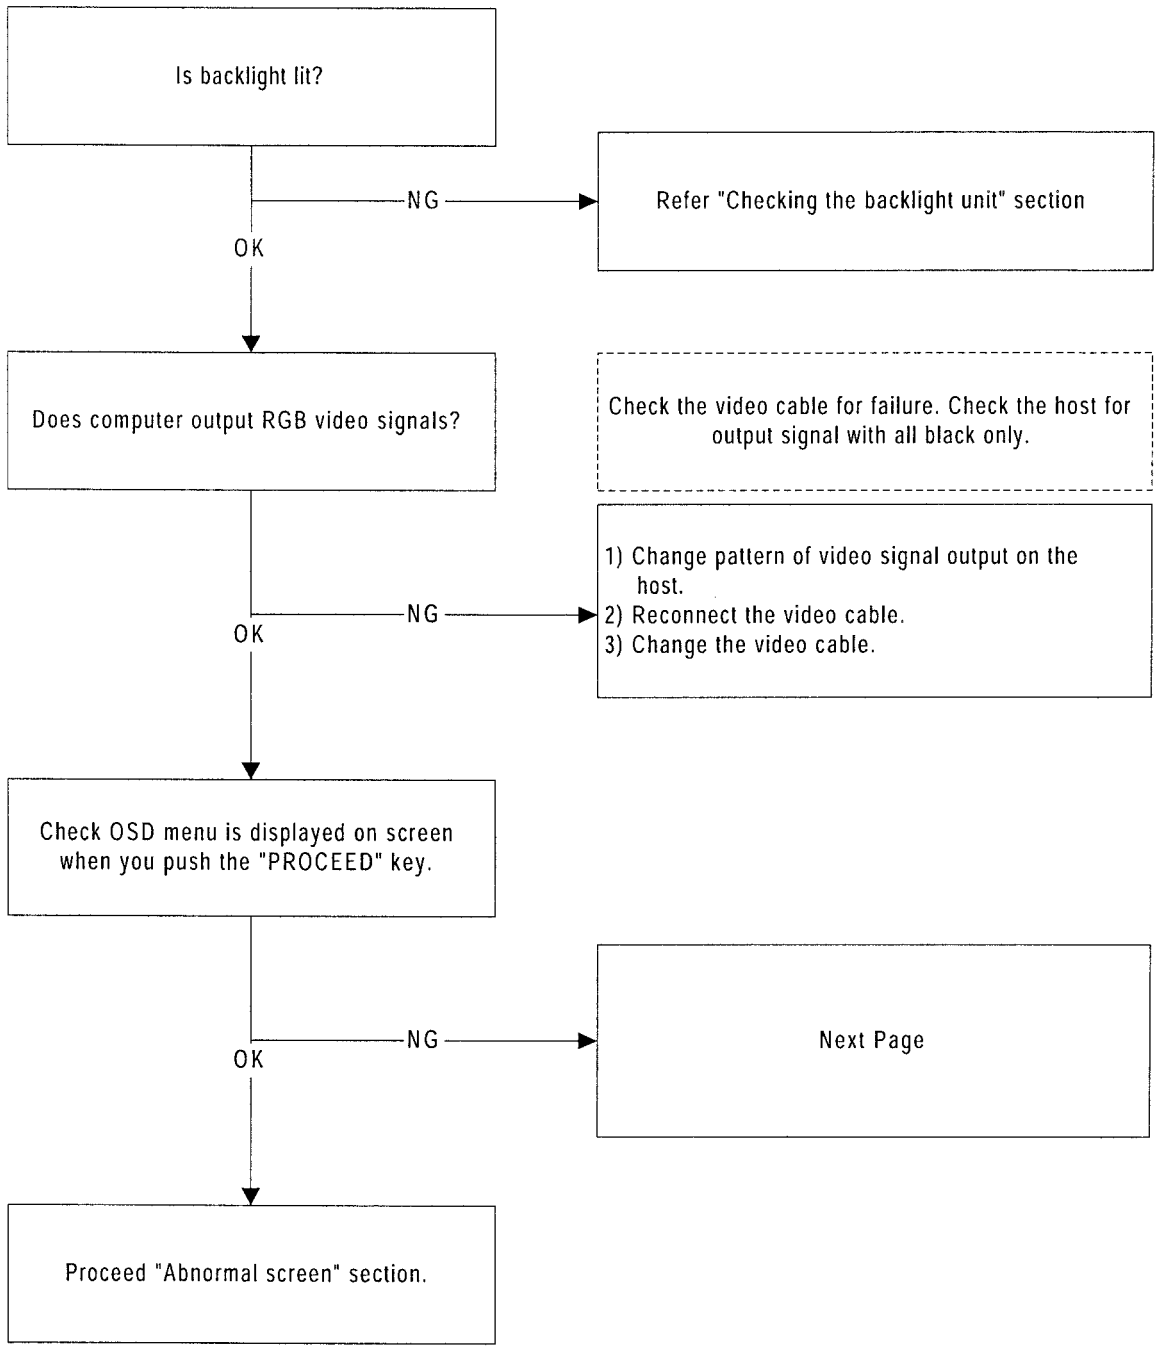
Is backlight lit?
NG
Refer "Checking the backlight unit" section
OK
Does computer output RGB video signals?
Check the video cable for failure. Check the host for output signal with all black only.
1) Change pattern of video signal output on the host.
2) Reconnect the video cable.
3) Change the video cable.
NG
OK
Check OSD menu is displayed on screen when you push the "PROCEED" key.
NG
Next Page
OK
Proceed "Abnormal screen" section.

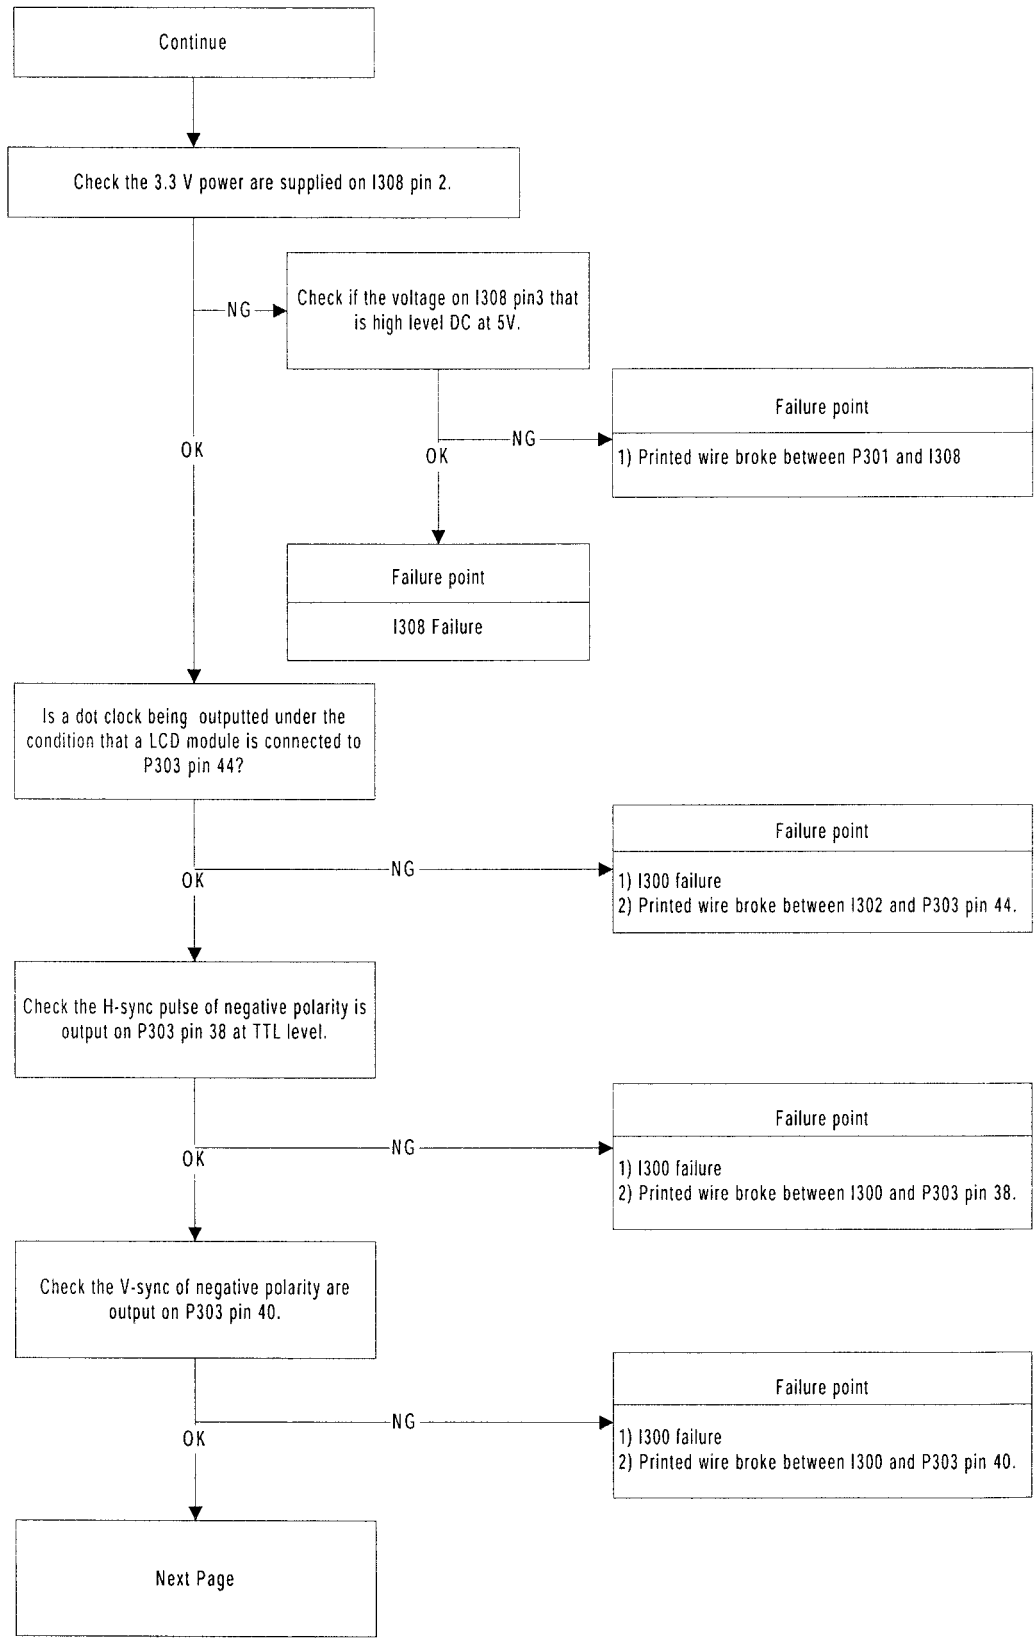
Continue
Check the 3.3 V power are supplied on I308 pin 2.
NG
Check if the voltage on I308 pin3 that is high level DC at 5V.
OK
NG
Failure point
1) Printed wire broke between P301 and I308
OK
Failure point
I308 Failure
Is a dot clock being outputted under the condition that a LCD module is connected to P303 pin 44?
OK
NG
Failure point
1) I300 failure
2) Printed wire broke between I302 and P303 pin 44.
Check the H-sync pulse of negative polarity is output on P303 pin 38 at TTL level.
OK
NG
Failure point
1) I300 failure
2) Printed wire broke between I300 and P303 pin 38.
Check the V-sync of negative polarity are output on P303 pin 40.
OK
NG
Failure point
1) I300 failure
2) Printed wire broke between I300 and P303 pin 40.
Next Page

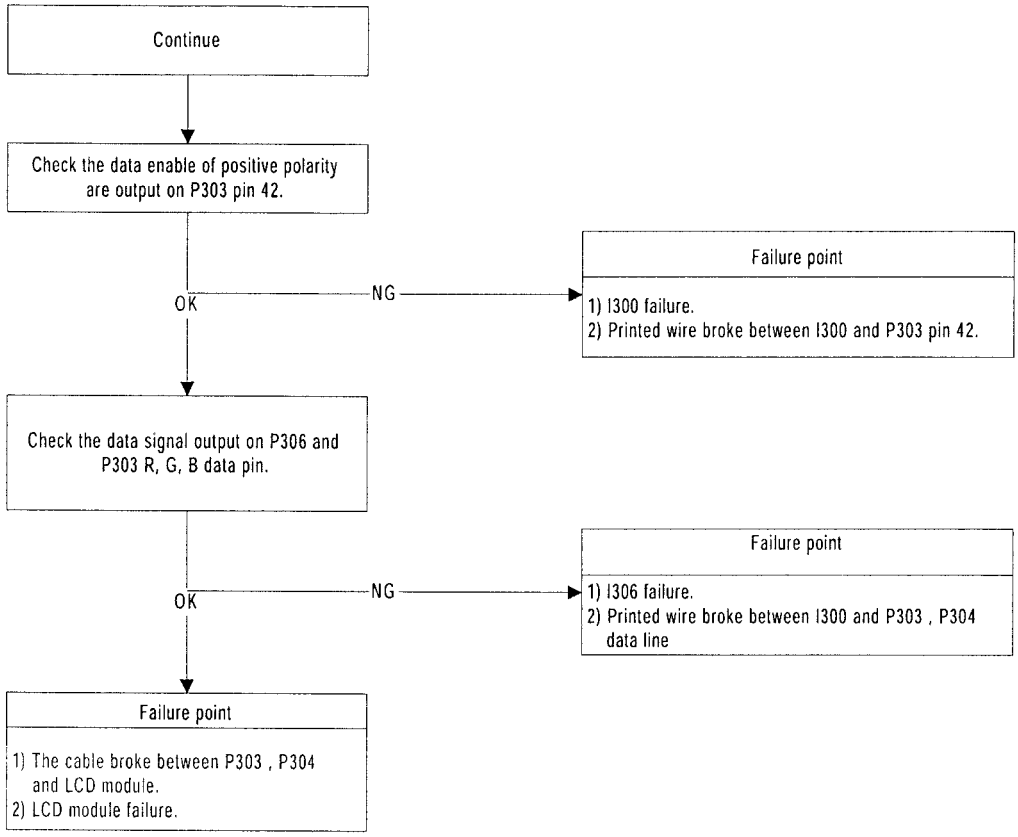
Continue
Check the data enable of positive polarity are output on P303 pin 42.
OK
NG
Failure point
1) I300 failure.
2) Printed wire broke between I300 and P303 pin 42.
Check the data signal output on P306 and P303 R, G, B data pin.
OK
NG
Failure point
1) I306 failure.
2) Printed wire broke between I300 and P303 , P304 data line
Failure point
1) The cable broke between P303 , P304 and LCD module.
2) LCD module failure.

3. Checking the back light unit

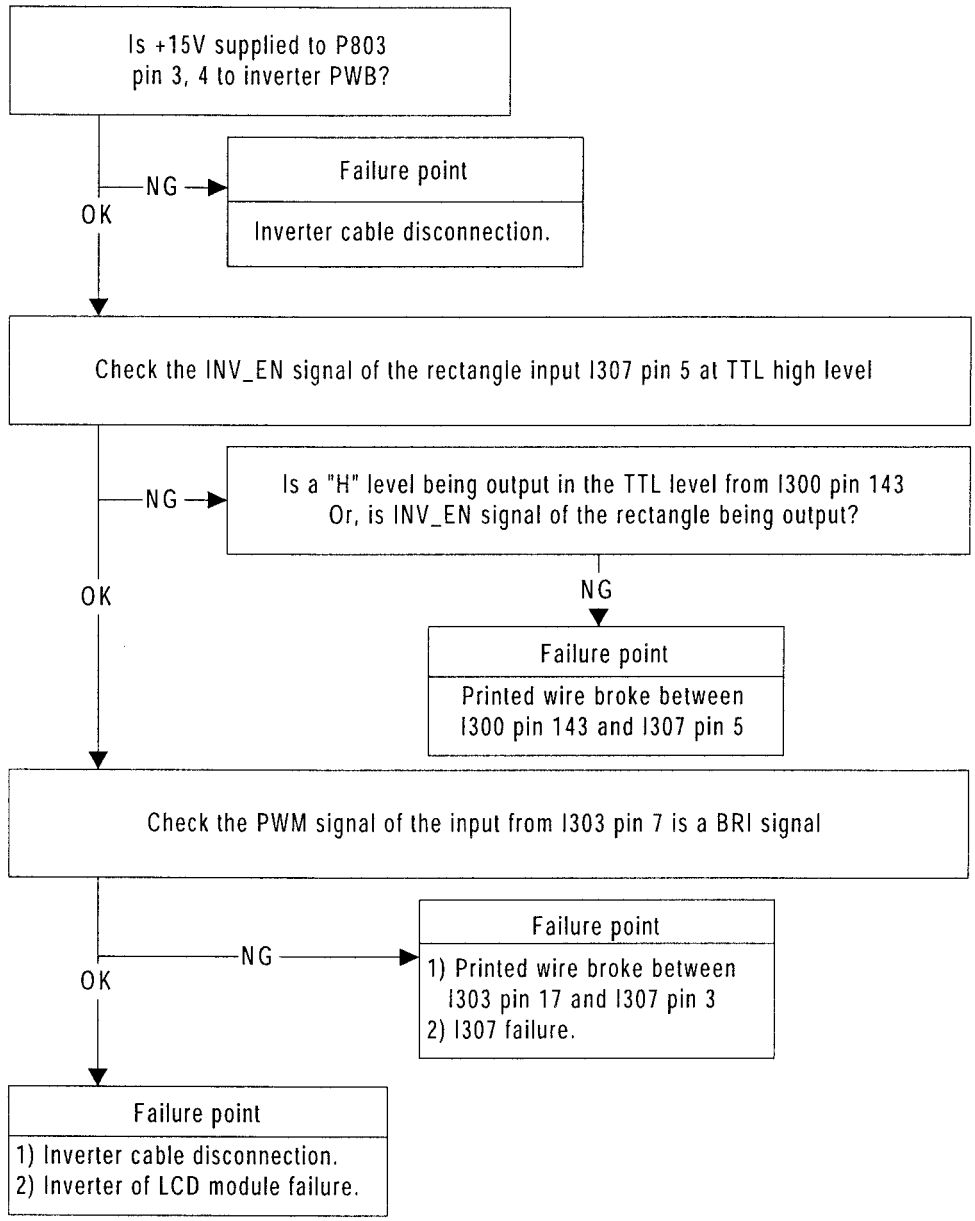
Is +15V supplied to P803 pin 3, 4 to inverter PWB?
NG
Failure point
Inverter cable disconnection.
OK
Check the INV_EN signal of the rectangle input I307 pin 5 at TTL high level
NG
Is a "H" level being output in the TTL level from I300 pin 143 Or, is INV_EN signal of the rectangle being output?
NG
Failure point
Printed wire broke between I300 pin 143 and I307 pin 5
OK
Check the PWM signal of the input from I303 pin 7 is a BRI signal
NG
Failure point
1) Printed wire broke between I303 pin 17 and I307 pin 3
2) I307 failure.
OK
Failure point
1) Inverter cable disconnection.
2) Inverter of LCD module failure.

4. Abnormal screen

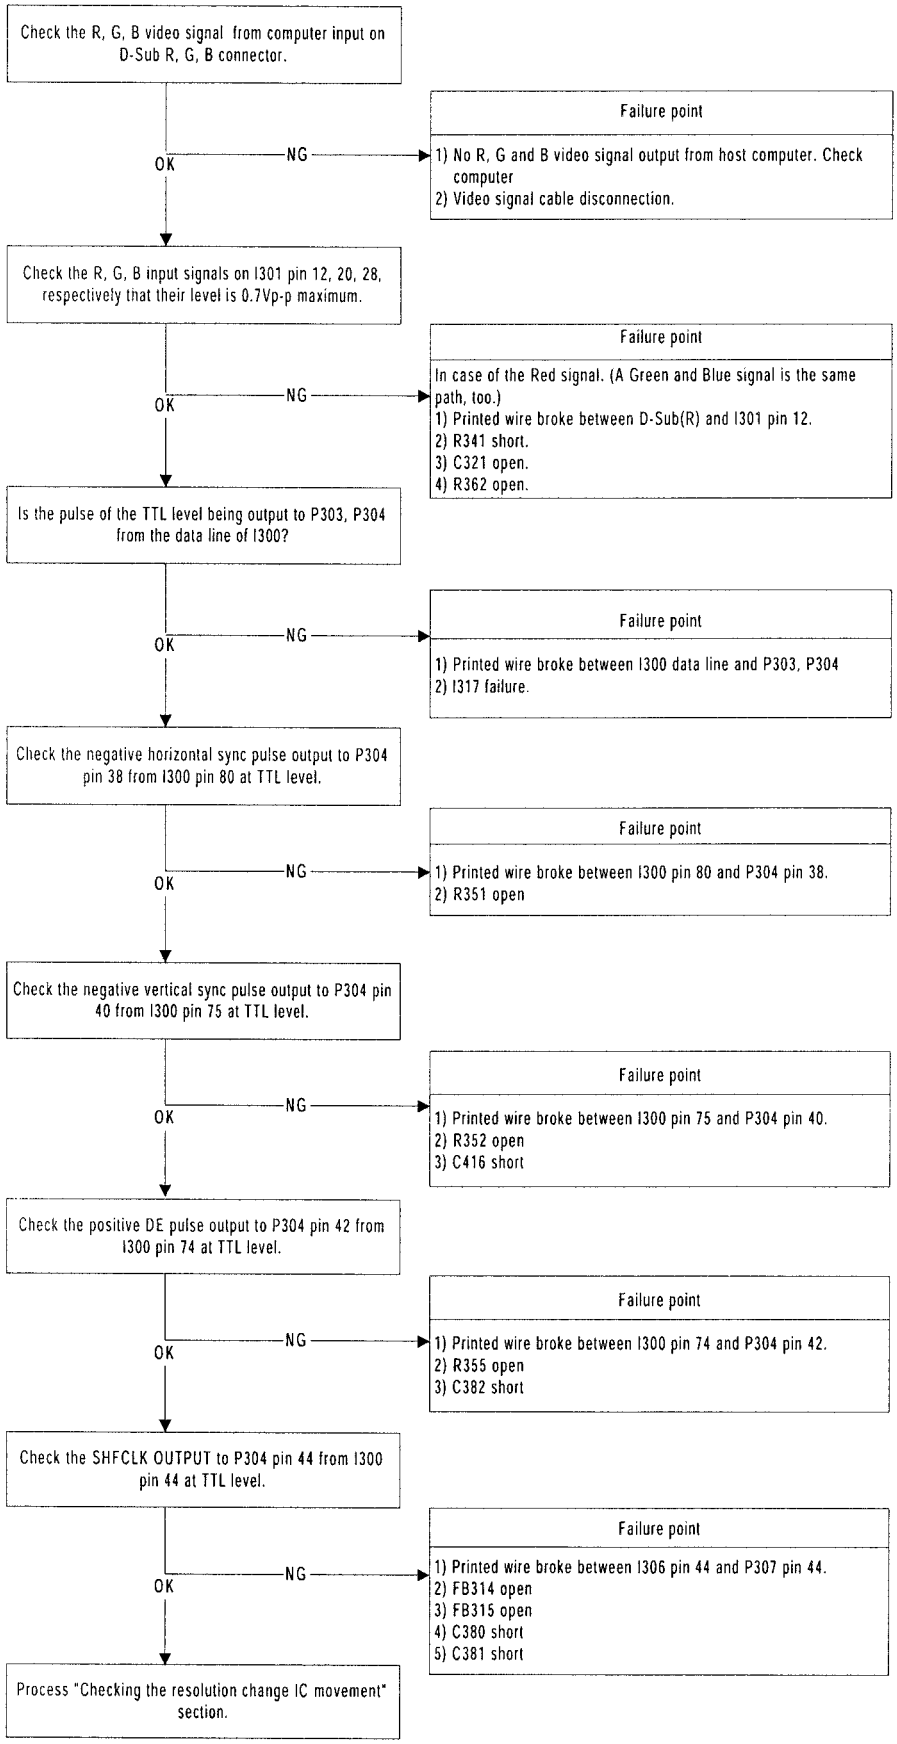
Check the R, G, B video signal from computer input on D-Sub R, G, B connector.
OK
NG
Failure point
1) No R, G and B video signal output from host computer. Check computer
2) Video signal cable disconnection.
Check the R, G, B input signals on I301 pin 12, 20, 28, respectively that their level is 0.7Vp-p maximum.
OK
NG
Failure point
In case of the Red signal. (A Green and Blue signal is the same path, too.)
1) Printed wire broke between D-Sub(R) and I301 pin 12.
2) R341 short.
3) C321 open.
4) R362 open.
Is the pulse of the TTL level being output to P303, P304 from the data line of I300?
OK
NG
Failure point
1) Printed wire broke between I300 data line and P303, P304
2) I317 failure.
Check the negative horizontal sync pulse output to P304 pin 38 from I300 pin 80 at TTL level.
OK
NG
Failure point
1) Printed wire broke between I300 pin 80 and P304 pin 38.
2) R351 open
Check the negative vertical sync pulse output to P304 pin 40 from I300 pin 75 at TTL level.
OK
NG
Failure point
1) Printed wire broke between I300 pin 75 and P304 pin 40.
2) R352 open
3) C416 short
Check the positive DE pulse output to P304 pin 42 from I300 pin 74 at TTL level.
OK
NG
Failure point
1) Printed wire broke between I300 pin 74 and P304 pin 42.
2) R355 open
3) C382 short
Check the SHFCLK OUTPUT to P304 pin 44 from I300 pin 44 at TTL level.
OK
NG
Failure point
1) Printed wire broke between I306 pin 44 and P307 pin 44.
2) FB314 open
3) FB315 open
4) C380 short
5) C381 short
Process "Checking the resolution change IC movement" section.

5. NO OSD display

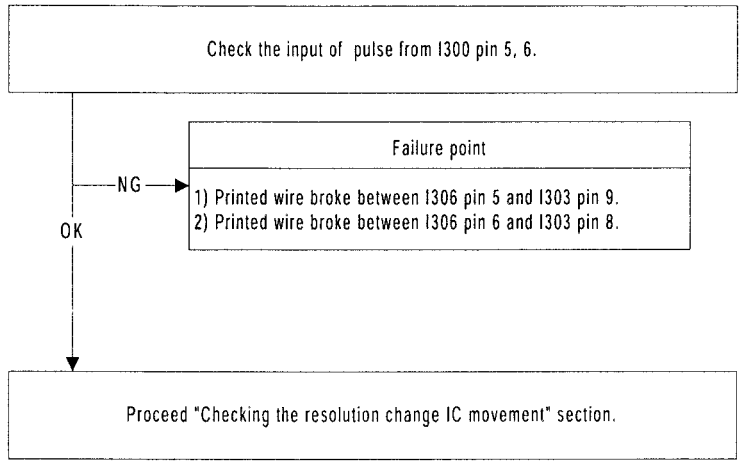
Check the input of pulse from I300 pin 5, 6.
NG
OK
Failure point
1) Printed wire broke between I306 pin 5 and I303 pin 9.
2) Printed wire broke between I306 pin 6 and I303 pin 8.
Proceed "Checking the resolution change IC movement" section.

6. Abnormal plug and play operation

6.1 Abnormal DDC2

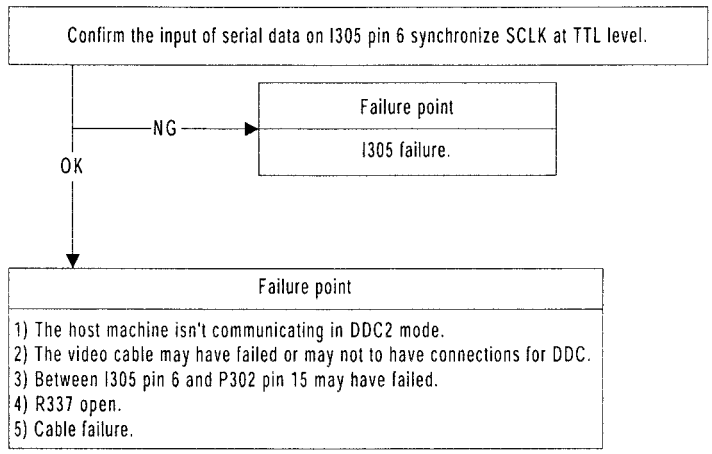
Confirm the input of serial data on I305 pin 6 synchronize SCLK at TTL level.
NG
Failure point
I305 failure.
OK
Failure point
1) The host machine isn't communicating in DDC2 mode.
2) The video cable may have failed or may not to have connections for DDC.
3) Between I305 pin 6 and P302 pin 15 may have failed.
4) R337 open.
5) Cable failure.

7. Checking the interface circuit of sync signal

7.1 Checking the control circuit of horizontal sync pulse

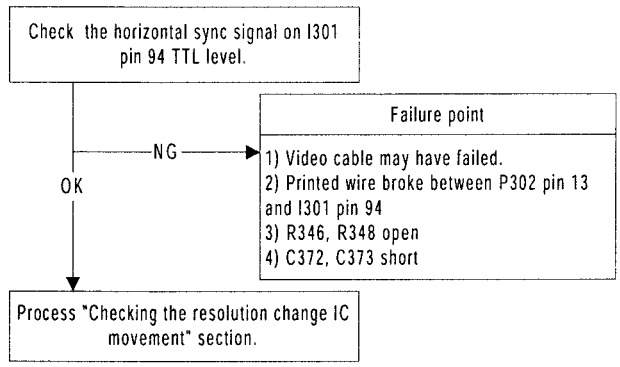
Check the horizontal sync signal on I301 pin 94 TTL level.
NG
OK
Failure point
1) Video cable may have failed.
2) Printed wire broke between P302 pin 13 and I301 pin 94
3) R346, R348 open
4) C372, C373 short
Process "Checking the resolution change IC movement" section.

7.2 Checking the control circuit of vertical sync pulse

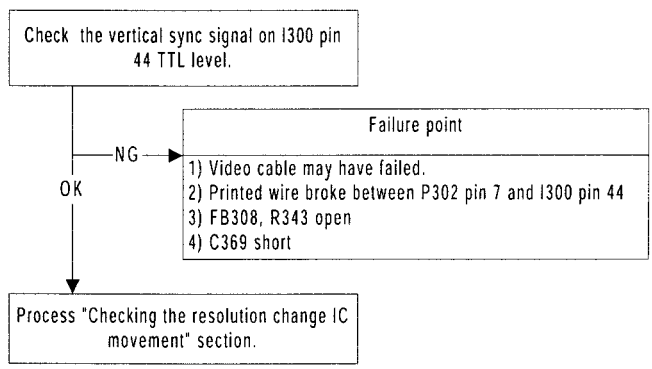
Check the vertical sync signal on I300 pin 44 TTL level.
NG
OK
Failure point
1) Video cable may have failed.
2) Printed wire broke between P302 pin 7 and I300 pin 44
3) FB308, R343 open
4) C369 short
Process "Checking the resolution change IC movement" section.

8. Checking the resolution change IC movement

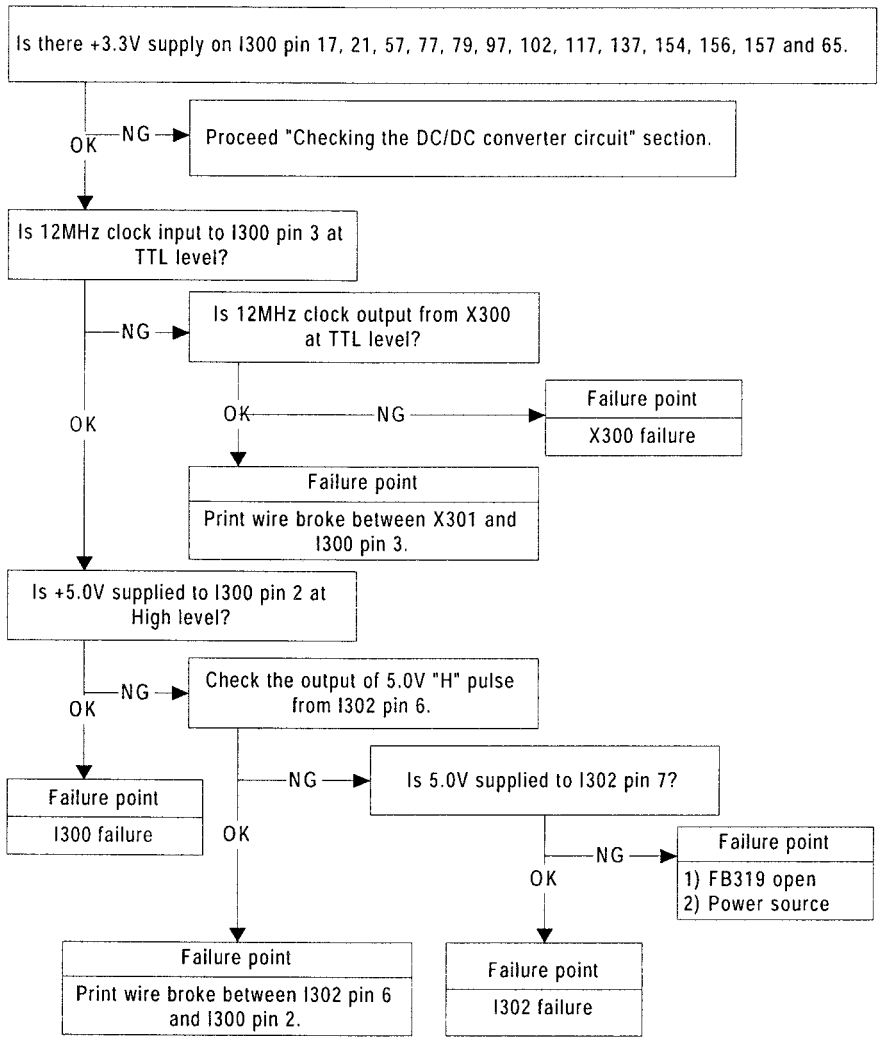
Is there +3.3V supply on I300 pin 17, 21, 57, 77, 79, 97, 102, 117, 137, 154, 156, 157 and 65.
OK
NG
Proceed "Checking the DC/DC converter circuit" section.
Is 12MHz clock input to I300 pin 3 at TTL level?
NG
Is 12MHz clock output from X300 at TTL level?
OK
OK
NG
Failure point
X300 failure
Failure point
Print wire broke between X301 and I300 pin 3.
Is +5.0V supplied to I300 pin 2 at High level?
OK
NG
Check the output of 5.0V "H" pulse from I302 pin 6.
Failure point
I300 failure
NG
Is 5.0V supplied to I302 pin 7?
OK
NG
Failure point
1) FB319 open
2) Power source
OK
Failure point
Print wire broke between I302 pin 6 and I300 pin 2.
Failure point
I302 failure

9. No power on

9.1 No power on (I)

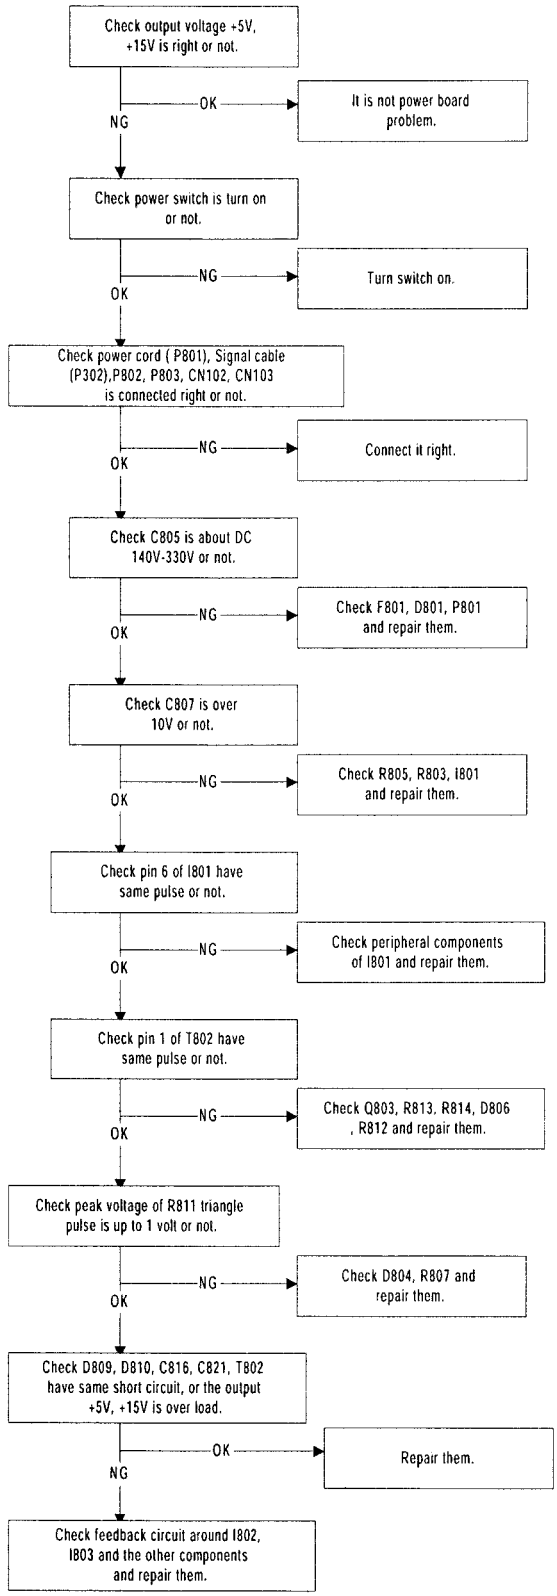
Check output voltage +5V, +15V is right or not.
OK
It is not power board problem.
NG
Check power switch is turn on or not.
NG
Turn switch on.
OK
Check power cord (P801), Signal cable (P302),P802, P803, CN102, CN103 is connected right or not.
NG
Connect it right.
OK
Check C805 is about DC 140V-330V or not.
NG
Check F801, D801, P801 and repair them.
OK
Check C807 is over 10V or not.
NG
Check R805, R803, I801 and repair them.
OK
Check pin 6 of I801 have same pulse or not.
NG
Check peripheral components of I801 and repair them.
OK
Check pin 1 of T802 have same pulse or not.
NG
Check Q803, R813, R814, D806 , R812 and repair them.
OK
Check peak voltage of R811 triangle pulse is up to 1 volt or not.
NG
Check D804, R807 and repair them.
OK
Check D809, D810, C816, C821, T802 have same short circuit, or the output +5V, +15V is over load.
OK
Repair them.
NG
Check feedback circuit around I802, I803 and the other components and repair them.

9.2 No power on (II)

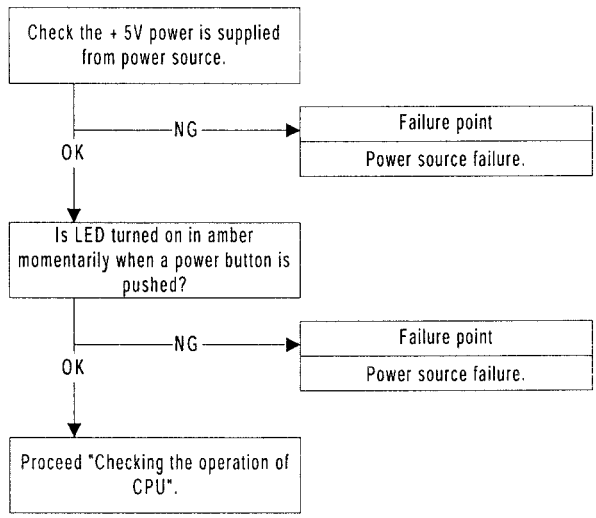

10. Checking the DC/DC converter circuit

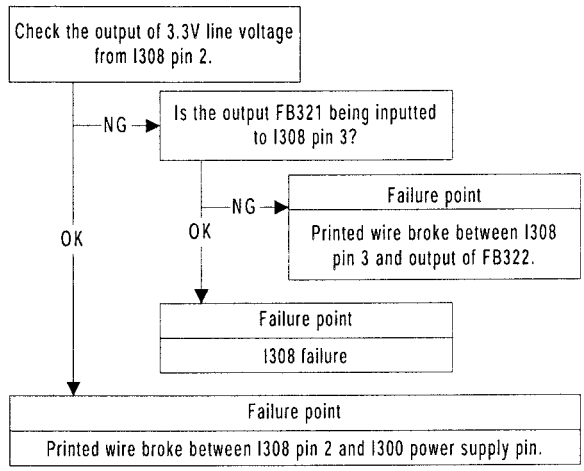
Check the output of 3.3V line voltage from I308 pin 2.
NG
Is the output FB321 being inputted to I308 pin 3?
NG
Failure point
Printed wire broke between I308 pin 3 and output of FB322.
OK
OK
Failure point
I308 failure
Failure point
Printed wire broke between I308 pin 2 and I300 power supply pin.

11. Checking the operation of CPU

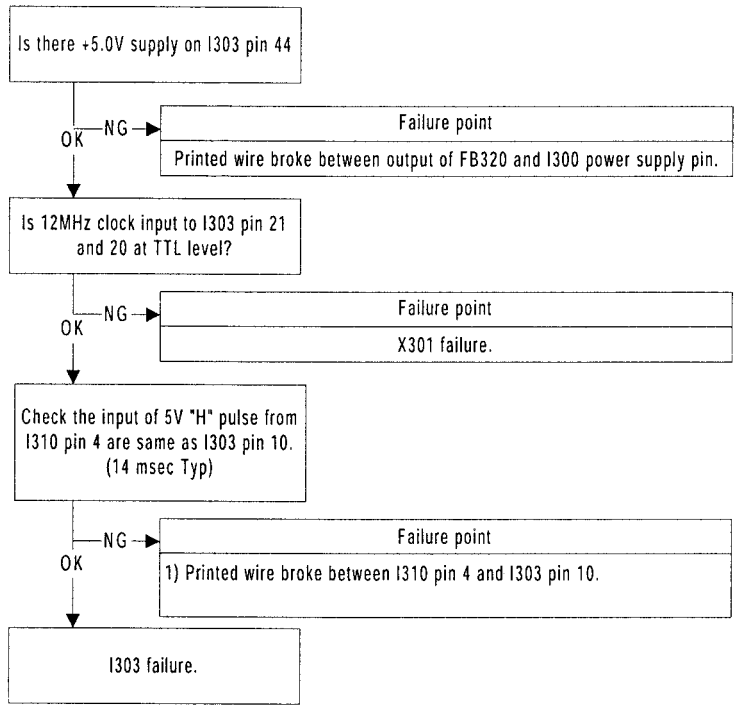
Is there +5.0V supply on I303 pin 44
OK
NG
Failure point
Printed wire broke between output of FB320 and I300 power supply pin.
Is 12MHz clock input to I303 pin 21 and 20 at TTL level?
OK
NG
Failure point
X301 failure.
Check the input of 5V "H" pulse from I310 pin 4 are same as I303 pin 10. (14 msec Typ)
OK
NG
Failure point
1) Printed wire broke between I310 pin 4 and I303 pin 10.
I303 failure.

12. Checking the audio circuit

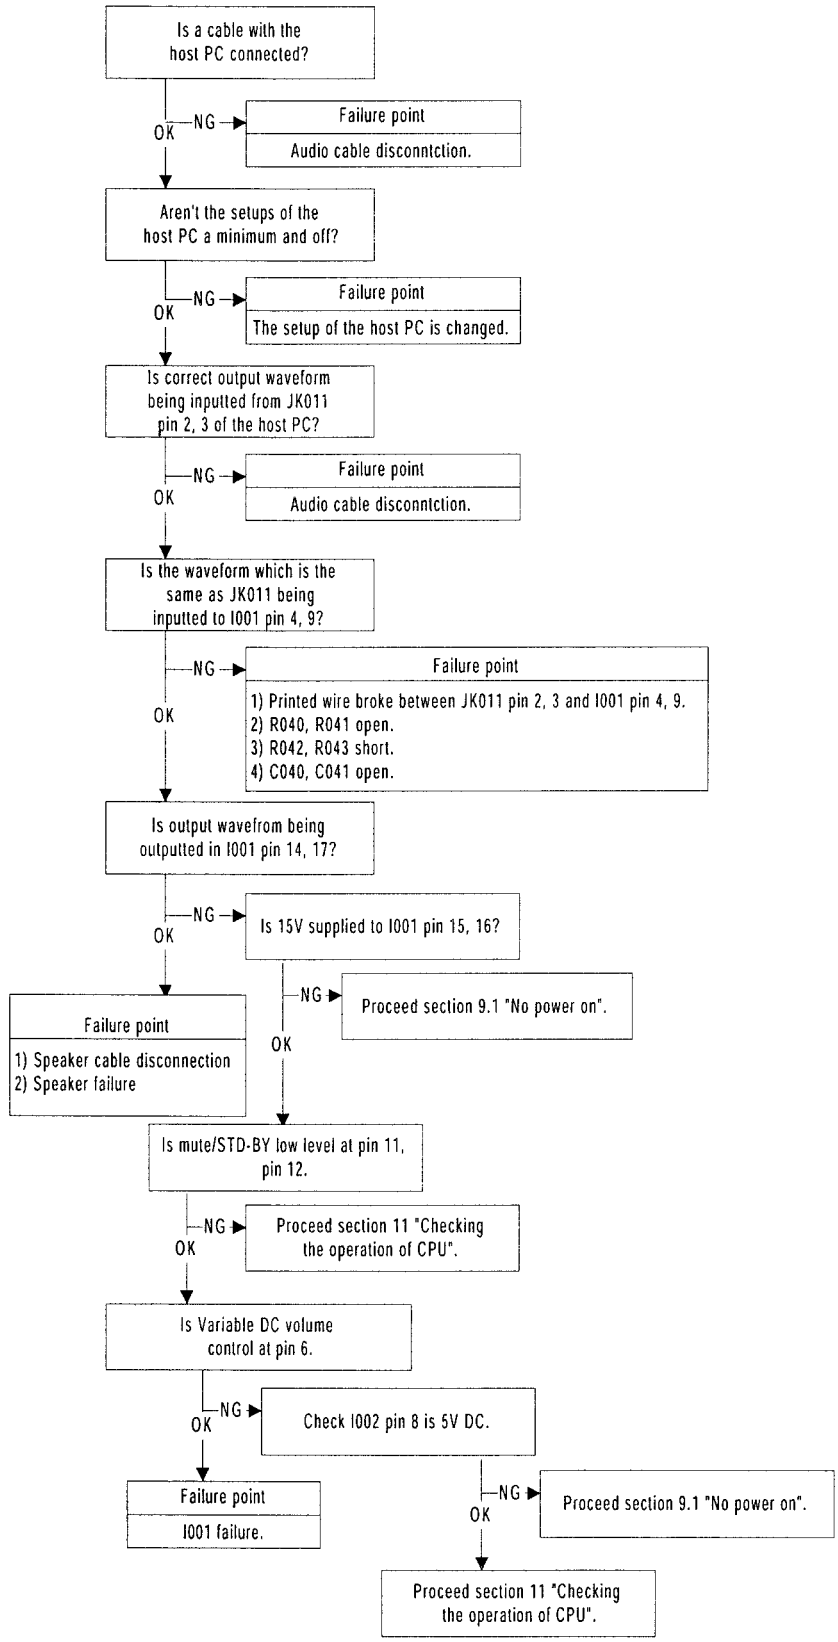
Is a cable with the host PC connected?
NG
Failure point
Audio cable disconntction.
OK
Aren't the setups of the host PC a minimum and off?
NG
Failure point
The setup of the host PC is changed.
OK
Is correct output waveform being inputted from JK011 pin 2, 3 of the host PC?
NG
Failure point
Audio cable disconntction.
OK
Is the waveform which is the same as JK011 being inputted to I001 pin 4, 9?
NG
Failure point
1) Printed wire broke between JK011 pin 2, 3 and I001 pin 4, 9.
2) R040, R041 open.
3) R042, R043 short.
4) C040, C041 open.
OK
Is output wavefrom being outputted in I001 pin 14, 17?
NG
Is 15V supplied to I001 pin 15, 16?
OK
NG
Proceed section 9.1 "No power on".
Failure point
1) Speaker cable disconnection
2) Speaker failure
OK
Is mute/STD-BY low level at pin 11, pin 12.
NG
Proceed section 11 "Checking the operation of CPU".
OK
Is Variable DC volume control at pin 6.
NG
Check I002 pin 8 is 5V DC.
OK
Failure point
I001 failure.
NG
Proceed section 9.1 "No power on".
OK
Proceed section 11 "Checking the operation of CPU".

13. Checking inverter board circuit

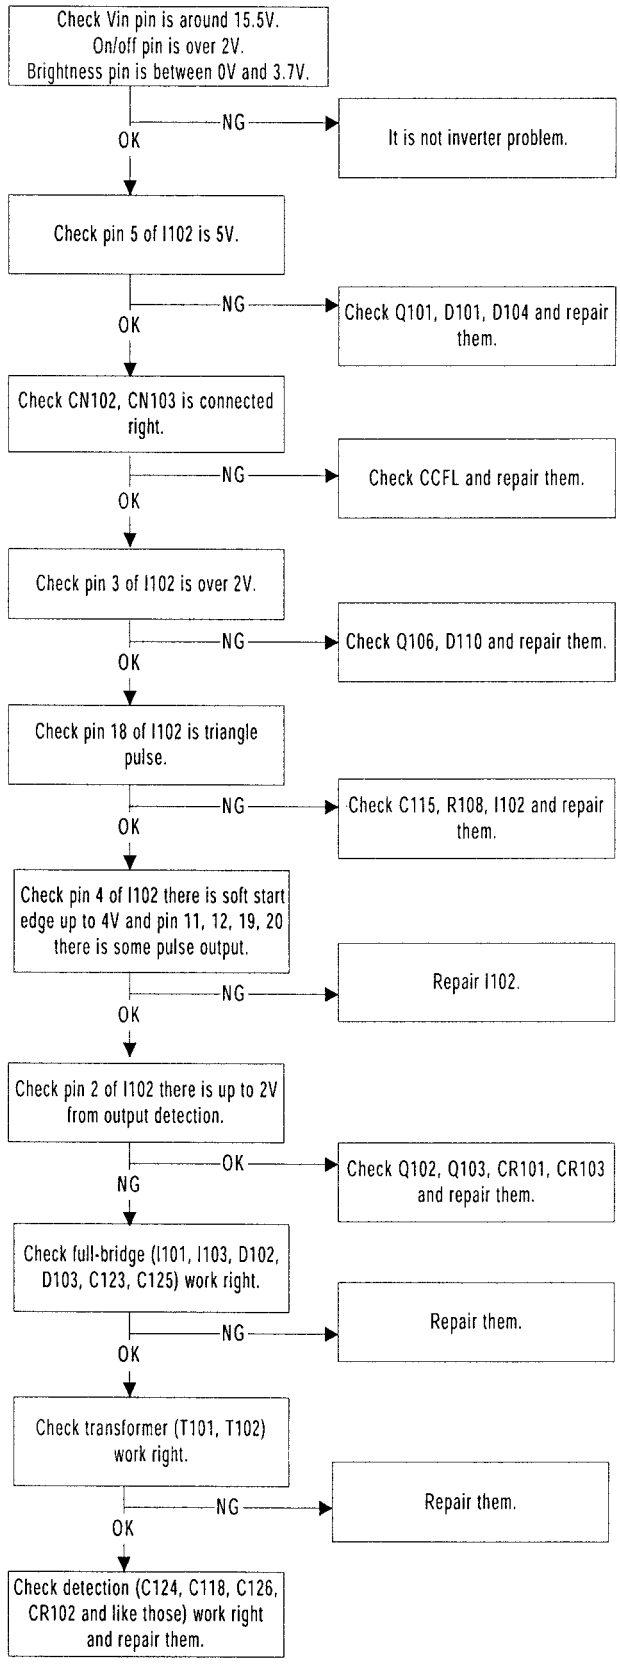
Check Vin pin is around 15.5V.
On/off pin is over 2V.
Brightness pin is between 0V and 3.7V.
NG
It is not inverter problem.
OK
Check pin 5 of I102 is 5V.
NG
Check Q101, D101, D104 and repair them.
OK
Check CN102, CN103 is connected right.
NG
Check CCFL and repair them.
OK
Check pin 3 of I102 is over 2V.
NG
Check Q106, D110 and repair them.
OK
Check pin 18 of I102 is triangle pulse.
NG
Check C115, R108, I102 and repair them.
OK
Check pin 4 of I102 there is soft start edge up to 4V and pin 11, 12, 19, 20 there is some pulse output.
NG
Repair I102.
OK
Check pin 2 of I102 there is up to 2V from output detection.
OK
Check Q102, Q103, CR101, CR103 and repair them.
NG
Check full-bridge (I101, I103, D102, D103, C123, C125) work right.
NG
Repair them.
OK
Check transformer (T101, T102) work right.
NG
Repair them.
OK
Check detection (C124, C118, C126, CR102 and like those) work right and repair them.

1. Recommended Parts List

Note: 1. The components identified by " ⚠ " mark are critical for X-ray safety. Replace these with only the same parts specified.

2. The components identified by " * " mark are critical parts.

3. There is only OTP IC at the model beginning (FPR stage or before). When it put in mass production and there must be Mask coming out. Please checkyou have spart parts need, please check BOM to get the last release part number and related information.

No.	Location	Part Number	Description
1 ***	I300	6447000406	IC MASCOT II CONTROLLER 160P PQFP
2 *	I301	6447000506	IC VITESSEI 100P QFP
3 *	I310	6446008108	IC NC7SZ04M5X SOT-23-5
4 **	I304	6448016508	IC EEPROM-24LC16B/SN SOP-8
5 **	I301	6447000506	IC ASIC-VITESSE2-100P-QFP
6 **	I307	6442001978	IC LM358DR 8P SOP
7 *	I308	6442023326	IC AIC1084-33CM 3P T0263
8 ***	Q300	6442007208	TR NPN SST2222A SOT-23
9 **	Q302	6427002508	FET-P-CHNL SI2305D3 SOT-2-3
10 ***	Q303	6442007308	TR NPN SST3904 SOT-23
11 ***	I001	6442023100	IC LINEAR-TDA7496L PDIP
12 *	I303	6448018900	IC CPU SM89516C25J PLCC44P

LITEON

LITE-ON TECHNOLOGY CORP.

5 F, No. 16, Sec. 4, Nanking E. Road, Taipei, Taiwan

Tel: 886-2-25706999 Fax: 886-2-25706888

URL:// www.liteontc.com.tw

Printed in Taiwan

LITE-ON TECHONLOG CORP
BOM LIST BY CKT-ID
P/N:4596132023 Desc:MONITOR-LCD-H15AAU(9)-#-E-2-(C)-LITEON

Lvl	CKTID	GI	Apr	OP	Item No	Description	Drqwing No	Uom	Quantity	SFly
1	0		No	10	5112300028	BURN-IN ASS'Y-H15AAU(9)-#-E-2-		EA	1	NO
2	0		No	10	5113100028	LCD ASS'Y-H15AAU(9)-#-E-2-(C)-		EA	1	NO
3	02U02		Yes	10	1241000200	LABEL-DATE CODE-----	8340000485	EA	1	NO
3	0SP00		Yes	10	6857102900	SPEAKER-N13AA12PCH27-JAZZ		EA	1	NO
3	0V001		Yes	10	6715008230	CABLE-VIDEO--1800mm-BLACK-3+7		EA	1	YES
3	0V007		Yes	10	6712450100	HARNESS-FPC-45P/30P-L210mm W47		EA	1	NO
3	0V150		Yes	10	6814002300	LCD-L150X2M-1-ACER		EA	1	YES
3	6B01M		Yes	10	7150240122-0A	SCREW-BTYPE--Pan-M4-12-Ni	8440003303	EA	4	NO
3	6B01N		Yes	10	7115240121-0A	SCREW-M4*12-DOUBLE WASHIER----		EA	4	NO
3	6B01W		Yes	10	7111230061	SCREW-MACHINE-Flat Washer-Pan-	8440001648	EA	4	NO
3	6B02M		No	10	7737704400-0A	BASE ASS'Y-LITEON-GC150ATA(99)	8140001321	EA	1	NO
3	6B02O		No	10	7140330081-0A	SCREW-DOUBLE THREAD-NO WASHER-	8440003643	EA	5	NO
3	6B02Q		Yes	10	7115230081-0A	SCREW-MACHINE-Double Washer-Pa	8440003378	EA	2	NO
3	6B02S		Yes	10	7115230081-0A	SCREW-MACHINE-Double Washer-Pa	8440003378	EA	2	NO
3	6B02U		Yes	10	7140130101	SCREW-DOUBLE THREAD--Round-M3-	8440000990	EA	2	NO
3	6B02W		Yes	10	7140130081	SCREW-DOUBLE THREAD--Round-M3-	8440000990	EA	4	NO
3	6B02Y		Yes	10	7150130061-0A	SCREW-B TYPE-NO WASHER-ROUND H		EA	2	NO
3	6F01P		Yes	10	7140130101	SCREW-DOUBLE THREAD--Round-M3-	8440000990	EA	3	NO
3	6F01Q		Yes	10	7140130101	SCREW-DOUBLE THREAD--Round-M3-	8440000990	EA	6	NO
3	6L01N		Yes	10	7111230061	SCREW-MACHINE-Flat Washer-Pan-	8440001648	EA	2	NO
3	6L01O		Yes	10	7111230061	SCREW-MACHINE-Flat Washer-Pan-	8440001648	EA	4	NO
3	6L01Q		Yes	10	7111230061	SCREW-MACHINE-Flat Washer-Pan-	8440001648	EA	4	NO
3	6L01R		Yes	10	7130330081	SCREW-TRIANGLE--Flat-M3-8-Zn	8440000016	EA	2	NO
3	6L01U		Yes	10	7150130041-0A	SCREW-----3X4(B TYPE)-		EA	12	NO
3	6L01V		Yes	10	7110430081	SCREW-MACHINE--Binding-M3-8-Zn	8440000696	EA	4	NO
3	6L01W		No	10	7110225041-0A	SCREW-MACHINE-PAN-M2.5-4-ZN-	8440000018	EA	2	NO
3	6L01Y		Yes	10	7156130081-0A	SCREW-BTYPE-Star Washer-Round-	8440003302	EA	1	NO
3	L0001		Yes	10	6881007901	CORE--A5FS-31X5X12-ADD TAPE 3M		EA	1	NO
3	P001A		Yes	10	6711070200-00	HARNESS--7P-70mm-2-1007#28-30/		EA	1	NO
3	P601A		Yes	10	6711090270-00	HARNESS--9P/8P-320mm-1571#28/1		EA	1	NO
4	06BA2		No	1	7740408600-0A	SWIVEL-BALL----#5250-ABS-HB		EA	1	YES
4	06BC2		YES	1	7742001030	RUBBER CUSHION-FOOT PAD--	8440001656	EA	4	NO
3	06B01		No	10	7742219850-0A	REAR COVER-LITEON-GC150AT(99)-	8140001139	EA	1	YES
3	06F01		No	10	7742219801-0A	FRONT COVER-LITE-ON-GC150ATA-E		EA	1	YES
3	06L01		Yes	10	7748706640-0A	BRACKET-LCD-HU150ATA-SECC-CLEA	8140001346	EA	1	NO
3	0T001		No	1	8140001138	TOOLING-LCD-FRONT COVER-EUREKA		EA	1	NO
3	6B01O		Yes	10	7742607190-0A	COVER-CABLE-LITEON-GC150AT(99)	8140001141	EA	1	NO
3	6B01P		YES	10	7737800850-0A	BRACKET-VESA ASSY---	8440003388	EA	1	NO
3	6B02N		Yes	10	7748706570-0B	BRACKET-BASE-GC150ATA--	8140001316	EA	1	NO
3	6B02P		Yes	10	7738000240-0A	HINGE-R-GC150AT----		EA	1	NO
3	6B02R		Yes	10	7738000250-0A	HINGE-L-GC150AT----		EA	1	NO
3	6B02T		Yes	10	7742607200-0A	COVER-ARM FRONT-LITEON-GC150AT	8140001143	EA	1	NO
3	6B02V		Yes	10	7742607210-0A	COVER-ARM REAR-LITEON-GC150AT(	8140001144	EA	1	NO
3	6B02X		Yes	10	7742002820-0A	SPONGE-SPEAKER SPONGE-PU-GRAY	8440003932	EA	2	YES
3	6B02Z		No	10	7742607760-0A	SUPPORT-PLASTICS-CABLE SUPPORT	8340002772	EA	1	NO
3	6F01M		Yes	10	7742805260-0A	PUSH BUTTON-POWER KNOB-N/B--ID	8340002553	EA	1	NO
3	6F01N		Yes	10	7742805270-0A	PUSH BUTTON-FUNCTION KEY-LITE-	8340002554	EA	1	NO
3	6F01O		No	10	7742301990-0A	LENS-LED-LITEON-GC150AT(99)-EU		EA	1	NO
3	6L01M		Yes	10	7746501120-0A	INSULATOR-BOTTOM-		EA	1	YES
3	6L01S		Yes	10	7746203150-0A	SHIELD-CHASSIS--GC150ATA-	8140001317	EA	1	NO
3	6L01T		Yes	10	7746501110-0A	INSULATOR-TOP-		EA	1	NO
2	0		No	10	5113200002	INVERTER BD-GGC150AT(99)-#-E-1		EA	1	NO
3	0		No	10	5213200002	SMT-INVERTER BD-GGC150ATA(99)-		EA	1	NO
3	9N050		Yes	10	1250000144	WIRE-SOLDER-06m/m--		lb	0,00001	NO
4	02U01		No	10	1241000205	LABEL-ID DATE CODE-----		EA	1	NO
4	0C102		YES	10	6374422582	CAP. MC-uF-2.2-16V-Z-Y5V-SMD 0		EA	1	NO
4	0C103		Yes	10	6374410502	CAP. MC-uF-1-16V-M-Y5V-SMD 080		EA	1	NO
4	0C104		YES	10	6373422406	CAP. MC-uF-0.22-25V-M-Y5V-SMD		EA	1	NO
4	0C105		YES	10	6373410406	CAP. MC-uF-0.1-25V-M-Y5V-SMD 0		EA	1	NO
4	0C106		YES	10	6371215206	CAP. MC-pF-1500-50V-M-X7R-SMD		EA	1	NO
4	0C107		YES	10	6371410306	CAP. MC-uF-0.01-50V-M-Y5V-SMD		EA	1	NO
4	0C108		YES	10	6371410306	CAP. MC-uF-0.01-50V-M-Y5V-SMD		EA	1	NO
4	0C109		YES	10	6371410306	CAP. MC-uF-0.01-50V-M-Y5V-SMD		EA	1	NO
4	0C110		YES	10	6373422406	CAP. MC-uF-0.22-25V-M-Y5V-SMD		EA	1	NO
4	0C111		YES	10	6373422406	CAP. MC-uF-0.22-25V-M-Y5V-SMD		EA	1	NO
4	0C113		YES	10	6373247306	CAP. MC-uF-0.047-25V-M-X7R-SMD		EA	1	NO
4	0C114		YES	10	6373410406	CAP. MC-uF-0.1-25V-M-Y5V-SMD 0		EA	1	NO
4	0C115		YES	10	6374122156	CAP. MC-pF-220-16V-J-NPO-SMD 0		EA	1	NO
4	0C116		YES	10	6371410306	CAP. MC-uF-0.01-50V-M-Y5V-SMD		EA	1	NO
4	0C117		YES	10	6373247306	CAP. MC-uF-0.047-25V-M-X7R-SMD		EA	1	NO
4	0C118		YES	10	6373410406	CAP. MC-uF-0.1-25V-M-Y5V-SMD 0		EA	1	NO
4	0C119		YES	10	6371218312	CAP. MC-uF-0.018-50V-K-X7R-SMD		EA	1	NO
4	0C121 51		YES	10	6370112059	CAP. MC-pF-12-3KV-J-NPO-SMD 18		EA	1	NO
4	0C121		No	10	6370112059-02	CAP. MC-pF-12-3KV-J-NPO-SMD-18		EA	1	NO
4	0C122		YES	10	6371218312	CAP. MC-uF-0.018-50V-K-X7R-SMD		EA	1	NO
4	0C123		YES	10	6375410683	CAP. MC-uF-10-10V-Z-Y5V-SMD-12		EA	1	NO
4	0C124 51		YES	10	6370112059	CAP. MC-pF-12-3KV-J-NPO-SMD 18		EA	1	NO
4	0C124		No	10	6370112059-02	CAP. MC-pF-12-3KV-J-NPO-SMD-18		EA	1	NO
4	0C125		YES	10	6375410683	CAP. MC-uF-10-10V-Z-Y5V-SMD-12		EA	1	NO
4	0C126		Yes	10	6371222212	CAP. MC-pF-2200-50V-K-X7R-SMD		EA	1	NO
4	0C127		Yes	10	6371222212	CAP. MC-pF-2200-50V-K-X7R-SMD		EA	1	NO
4	0D101		YES	10	6414056098	DIODE-ZNR-RLZ TE-11-5.6C-LL-34		EA	1	NO
4	0D102		YES	10	6413040038	DIODE-SCHOTTKY-RB751V-40-ROHM-		EA	1	NO
4	0D103		YES	10	6413040038	DIODE-SCHOTTKY-RB751V-40-ROHM-		EA	1	NO
4	0D104		YES	10	6414075018	DIODE-ZNR-RLZ TE-11 7.5B LL-34		EA	1	NO
4	0D105		Yes	10	6412001738	DIODE--RLS4148 LL-34 SMD----RO		EA	1	NO
4	0D106		Yes	10	6412001738	DIODE--RLS4148 LL-34 SMD----RO		EA	1	NO
4	0D107		YES	10	6413040038	DIODE-SCHOTTKY-RB751V-40-ROHM-		EA	1	NO
4	0D108		Yes	10	6412001738	DIODE--RLS4148 LL-34 SMD----RO		EA	1	NO
4	0D109		Yes	10	6412001738	DIODE--RLS4148 LL-34 SMD----RO		EA	1	NO
4	0D110		Yes	10	6412001738	DIODE--RLS4148 LL-34 SMD----RO		EA	1	NO

4	0F101	Yes	10	6851002000	FUSE-TIME LAG-2A--TR1/6125TD-B	EA	1	YES
4	0I101 51	YES	10	6442033108	IC-Si4532ADY-T1-8P-SMD-VISHAY-	EA	1	NO
4	0I101 52	Yes	10	6442033128	IC-LINEAR-IRF7309-8PIN-SOP-I.R	EA	1	NO
4	0I101	No	10	6442033118	IC-SI4532DY-8PIN-SMD-FAIRCHILD	EA	1	NO
4	0I102	Yes	10	6442032808	IC-OZ960S-20P-SSOP-O2-	EA	1	NO
4	0I103 51	YES	10	6442033108	IC-Si4532ADY-T1-8P-SMD-VISHAY-	EA	1	NO
4	0I103 52	Yes	10	6442033128	IC-LINEAR-IRF7309-8PIN-SOP-I.R	EA	1	NO
4	0I103	No	10	6442033118	IC-SI4532DY-8PIN-SMD-FAIRCHILD	EA	1	NO
4	0Q101	Yes	10	6422007308	TRANSISTOR-NPN-SST3904-T116--S	EA	1	NO
4	0Q102	YES	10	6426010708	FET-N-CHNL-2N7002-SOT-23-FRCHL	EA	1	NO
4	0Q103	YES	10	6426010708	FET-N-CHNL-2N7002-SOT-23-FRCHL	EA	1	NO
4	0Q104	YES	10	6426010708	FET-N-CHNL-2N7002-SOT-23-FRCHL	EA	1	NO
4	0Q105	YES	10	6426010708	FET-N-CHNL-2N7002-SOT-23-FRCHL	EA	1	NO
4	0Q106	Yes	10	6423000708	TRANSISTOR-PNP-SST3906-T116--	EA	1	NO
4	0R101	YES	10	6252100156	RES. CHIP-R-KOHM-1-1/10W-J-603	EA	1	NO
4	0R102	Yes	10	6252220956	RES. CHIP-R-OHM-22-1/10W-J-060	EA	1	NO
4	0R103	Yes	10	6252220956	RES. CHIP-R-OHM-22-1/10W-J-060	EA	1	NO
4	0R104	YES	10	6252130356	RES. CHIP-R-KOHM-130-1/10W-J-0	EA	1	NO
4	0R105	YES	10	6252270356	RES. CHIP-R-KOHM-270-1/10W-J-0	EA	1	NO
4	0R106	YES	10	6252110356	RES. CHIP-R-KOHM-110-1/10W-J-0	EA	1	NO
4	0R107	Yes	10	6252100356	RES. CHIP-R-KOHM-100-1/10W-J-0	EA	1	NO
4	0R108	YES	10	6252649246	RES. CHIP-R-KOHM-64.9-1/10W-F-	EA	1	NO
4	0R109	YES	10	6252110356	RES. CHIP-R-KOHM-110-1/10W-J-0	EA	1	NO
4	0R110	YES	10	6252100456	RES. CHIP-R-MOHM-1-1/10W-J-603	EA	1	NO
4	0R111	YES	10	6252510356	RES. CHIP-R-KOHM-510-1/10W-J-0	EA	1	NO
4	0R112	YES	10	6252180256	RES. CHIP-R-KOHM-18-1/10W-J-06	EA	1	NO
4	0R113	Yes	10	6252510256	RES. CHIP-R-KOHM-51-1/10W-J-06	EA	1	NO
4	0R114	YES	10	6252100456	RES. CHIP-R-MOHM-1-1/10W-J-603	EA	1	NO
4	0R115	YES	10	6252100456	RES. CHIP-R-MOHM-1-1/10W-J-603	EA	1	NO
4	0R116	Yes	10	6252510256	RES. CHIP-R-KOHM-51-1/10W-J-06	EA	1	NO
4	0R117	Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-06	EA	1	NO
4	0R118	Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-06	EA	1	NO
4	0R119	Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-06	EA	1	NO
4	0R120	YES	10	6252680046	RES. CHIP-R-OHM-680-1/10W-F-06	EA	1	NO
4	0R121	YES	10	6252412046	RES. CHIP-R-OHM-412-1/10W-F-06	EA	1	NO
4	0R122	YES	10	6252680046	RES. CHIP-R-OHM-680-1/10W-F-06	EA	1	NO
4	0R123	YES	10	6252412046	RES. CHIP-R-OHM-412-1/10W-F-06	EA	1	NO
4	0R126	Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-06	EA	1	NO
4	0R127	YES	10	6252100156	RES. CHIP-R-KOHM-1-1/10W-J-603	EA	1	NO
4	0T101	Yes	10	6132000200	XFRMER--T-0002-XTREME-SMD	EA	1	YES
4	0T102	Yes	10	6132000200	XFRMER--T-0002-XTREME-SMD	EA	1	YES
4	CN101 51	Yes	10	6613060050	PLUG-6P-2.0mm-88291-0600-ACES	EA	1	NO
4	CN101	YES	10	6613060030	PLUG-06P-2.0mm-JST\S6B-PH-SM3-	EA	1	NO
4	CN102	Yes	10	6610020010	CONNECTOR----SM02(8.0)B-BHS-1-	EA	1	NO
4	CN103	Yes	10	6610020010	CONNECTOR----SM02(8.0)B-BHS-1-	EA	1	NO
4	CR101	Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROH	EA	1	NO
4	CR102	Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROH	EA	1	NO
4	CR103	Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROH	EA	1	NO
4	CR104	Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROH	EA	1	NO
4	U1217	No	10	6832121700-02	PCB-INVERTER BD-PTB-1217	EA	1	YES
3	0C101	Yes	10	6311322141	CAP. ALU-uF-220-25V-LL-105C-8x	EA	1	NO
2	0	No	10	5113300030	INTERFACE BD-H15AAU(9)-#-U-1-(	EA	1	NO
3	0	No	10	5213300030	SMT-INTERFACE BD-H15AAU(9)-#-U	EA	1	NO
3	02U01	No	10	1241000205	LABEL-ID DATE CODE-----	EA	1	NO
4	0C300	Yes	10	6371115051	CAP. MC-pF-15-50V-J-NPO-SMD-04	EA	1	NO
4	0C301	Yes	10	6371115051	CAP. MC-pF-15-50V-J-NPO-SMD-04	EA	1	NO
4	0C302	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C303	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C304	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C305	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C306	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C307	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C308	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C309	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C310	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C311	Yes	10	6371215106	CAP. MC-pF-150-50V-M-X7R-SMD 0	EA	1	NO
4	0C312	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C313	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C314	YES	10	6375410683	CAP. MC-uF-10-10V-Z-Y5V-SMD-12	EA	1	NO
4	0C315	Yes	10	6373239316	CAP. MC-uF-0.039-25V-K-X7R-SMD	EA	1	NO
4	0C318	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C319	Yes	10	6373247216	CAP. MC-uF-0.0047-25V-K-X7R-SM	EA	1	NO
4	0C320	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C321	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C322	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C323	Yes	10	6373247216	CAP. MC-uF-0.0047-25V-K-X7R-SM	EA	1	NO
4	0C324	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C325	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C326	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C327	Yes	10	6373247216	CAP. MC-uF-0.0047-25V-K-X7R-SM	EA	1	NO
4	0C328	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C329	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C330	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C332	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C333	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C334	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C335	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C336	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C337	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C338	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C339	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C340	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C341	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C343	Yes	10	6371115051	CAP. MC-pF-15-50V-J-NPO-SMD-04	EA	1	NO
4	0C344	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C345	Yes	10	6371115051	CAP. MC-pF-15-50V-J-NPO-SMD-04	EA	1	NO
4	0C346	YES	10	6373247316	CAP. MC-uF-0.047-25V-K-X7R-SMD	EA	1	NO
4	0C347	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C348	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO

4	0C349	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C350	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C351	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C352	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C353	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C354	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C355	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C356	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C357	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C359	Yes	10	6371147056	CAP. MC-pF-47-50V-J-NPO-SMD 06	EA	1	NO
4	0C360	Yes	10	6371147056	CAP. MC-pF-47-50V-J-NPO-SMD 06	EA	1	NO
4	0C361	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C363	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C365	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C366	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C368	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C369	Yes	10	6371110151	CAP. MC-pF-100-50V-J-NPO-SMD 0	EA	1	NO
4	0C370	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C371	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C372	Yes	10	6371110151	CAP. MC-pF-100-50V-J-NPO-SMD 0	EA	1	NO
4	0C373	Yes	10	6371110056	CAP. MC-pF-10-50V-J-NPO-SMD	EA	1	NO
4	0C374	Yes	10	6371110056	CAP. MC-pF-10-50V-J-NPO-SMD	EA	1	NO
4	0C375	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C377	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C378	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C379	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C380	Yes	10	6371147056	CAP. MC-pF-47-50V-J-NPO-SMD 06	EA	1	NO
4	0C381	Yes	10	6371150956	CAP. MC-pF-5-50V-J-NPO-SMD 060	EA	1	NO
4	0C382	Yes	10	6371110151	CAP. MC-pF-100-50V-J-NPO-SMD 0	EA	1	NO
4	0C383	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C385	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C386	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C387	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C388	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C389	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C391	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C392	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C394	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C396	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C398	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C399	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C400	YES	10	6375410683	CAP. MC-uF-10-10V-Z-Y5V-SMD-12	EA	1	NO
4	0C401	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C402	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C403	YES	10	6375410683	CAP. MC-uF-10-10V-Z-Y5V-SMD-12	EA	1	NO
4	0C404	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C405	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C407	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C409	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C410	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C411	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C412	Yes	10	6311210043	ALUMINATOR-uF-10-16V-T-105C--S	EA	1	NO
4	0C414	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C415	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA	1	NO
4	0C416	Yes	10	6371110151	CAP. MC-pF-100-50V-J-NPO-SMD 0	EA	1	NO
4	0C417	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C418	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C419	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	0C420	No	10	6374447486-01	CAP. MC-uF-0.47-16V-Z-Y5V-SMD-	EA	1	NO
4	0D303	YES	10	6412001778	DIODE-MM4148-SMD-GOODARK---	EA	1	NO
4	0D304	YES	10	6412001778	DIODE-MM4148-SMD-GOODARK---	EA	1	NO
4	0D305	Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROH	EA	1	NO
4	0D306	YES	10	6412001778	DIODE-MM4148-SMD-GOODARK---	EA	1	NO
4	0D307	Yes	10	6414056038	DIODE-ZNR-RLZ TE-11 5.6B LL-34	EA	1	NO
4	0D308	YES	10	6412001778	DIODE-MM4148-SMD-GOODARK---	EA	1	NO
4	0D309	Yes	10	6414056038	DIODE-ZNR-RLZ TE-11 5.6B LL-34	EA	1	NO
4	0D310	Yes	10	6414056038	DIODE-ZNR-RLZ TE-11 5.6B LL-34	EA	1	NO
4	0D311	Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROH	EA	1	NO
4	0D312	Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROH	EA	1	NO
4	0D313	Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROH	EA	1	NO
4	0D314	Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROH	EA	1	NO
4	0D315	Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROH	EA	1	NO
4	0D316	Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROH	EA	1	NO
4	0D317	Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROH	EA	1	NO
4	0D318	Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROH	EA	1	NO
4	0I300	Yes	10	6447000406	IC-ASIC-MASCOT II CONTROLLER-1	EA	1	NO
4	0I301	Yes	10	6447000506	IC-ASIC-VITESSE2-100P-QFP-MRT	EA	1	NO
4	0I302	Yes	10	6444006108	IC-MOS-M51953AFP-8P-SOP-	EA	1	NO
4	0I304	YES	10	6448016508	IC-EEPROM-24LC16B/SN-8P-SOP	EA	1	NO
4	0I305	Yes	10	6448018208	IC-24LC02B-8PIN-SOP-MICROCHIP	EA	1	NO
4	0I306	Yes	10	6446006218	IC-TTL-74LVC14-14P-TSSOP-TI	EA	1	NO
4	0I307	Yes	10	6442001978	IC-Linear-LM358DR-8P-SOP-TI	EA	1	NO
4	0I308	Yes	10	6442023326	IC-Linear-AIC1084-33CM-3P-TO26	EA	1	NO
4	0I309	Yes	10	6442018028	IC-LINEAR-AIC1722-33CX-3.3V-SO	EA	1	NO
4	0I310	YES	10	6446008108	IC-TTL-NC7SZ04M5X-5P--FAIRCHIL	EA	1	NO
4	0P303	Yes	10	6640045400	CONNECTOR-FPC-45P-0.5mm-XF2H-4	EA	1	NO
4	0P304	Yes	10	6640030400	CONNECTOR-FPC-30P-0.5mm-XF2H-3	EA	1	NO
4	0Q300	YES	10	6422007208	TRANSISTOR-NPN-SST2222A-SMD--8	EA	1	NO
4	0Q301	YES	10	6422007208	TRANSISTOR-NPN-SST2222A-SMD--8	EA	1	NO
4	0Q302	Yes	10	6427002508	FET-P-CHNL-SI2305DS-VISHAY	EA	1	NO
4	0Q303	Yes	10	6422007308	TRANSISTOR-NPN-SST3904-T116--S	EA	1	NO
4	0R303	Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-06	EA	1	NO
4	0R304	Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-06	EA	1	NO
4	0R305	Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-06	EA	1	NO
4	0R306	Yes	10	6252510046	RES. CHIP-R-OHM-510-1/10W-F-06	EA	1	NO
4	0R307	YES	10	6252100456	RES. CHIP-R-MOHM-1-1/10W-J-603	EA	1	NO
4	0R308	Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-060	EA	1	NO
4	0R309	Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-060	EA	1	NO
4	0R310	Yes	10	6252220156	RES. CHIP-R-KOHM-2.2-1/10W-J-0	EA	1	NO

4	0R311	Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-060	EA	1	NO
4	0R312	Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-060	EA	1	NO
4	0R313	YES	10	6252100456	RES. CHIP-R-MOHM-1-1/10W-J-603	EA	1	NO
4	0R314	Yes	10	6252220156	RES. CHIP-R-KOHM-2.2-1/10W-J-0	EA	1	NO
4	0R315	Yes	10	6252220156	RES. CHIP-R-KOHM-2.2-1/10W-J-0	EA	1	NO
4	0R318	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA	1	NO
4	0R319	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA	1	NO
4	0R323	Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-060	EA	1	NO
4	0R324	Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-060	EA	1	NO
4	0R325	Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-060	EA	1	NO
4	0R326	Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-060	EA	1	NO
4	0R327	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA	1	NO
4	0R328	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA	1	NO
4	0R329	YES	10	6252680056	RES. CHIP-R-OHM-680-1/10W-J-60	EA	1	NO
4	0R330	YES	10	6252100156	RES. CHIP-R-KOHM-1-1/10W-J-603	EA	1	NO
4	0R331	YES	10	6252680056	RES. CHIP-R-OHM-680-1/10W-J-60	EA	1	NO
4	0R332	YES	10	6252100156	RES. CHIP-R-KOHM-1-1/10W-J-603	EA	1	NO
4	0R334	YES	10	6252470256	RES. CHIP-R-KOHM-47-1/10W-J-60	EA	1	NO
4	0R335	YES	10	6252470256	RES. CHIP-R-KOHM-47-1/10W-J-60	EA	1	NO
4	0R337	Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-060	EA	1	NO
4	0R338	Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-060	EA	1	NO
4	0R339	Yes	10	6252750956	RES. CHIP-R-OHM-75-1/10W-J-060	EA	1	NO
4	0R340	Yes	10	6252750956	RES. CHIP-R-OHM-75-1/10W-J-060	EA	1	NO
4	0R341	Yes	10	6252750956	RES. CHIP-R-OHM-75-1/10W-J-060	EA	1	NO
4	0R342	Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-06	EA	1	NO
4	0R343	Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-06	EA	1	NO
4	0R346	Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-06	EA	1	NO
4	0R347	Yes	10	6252150056	RES. CHIP-R-OHM-150-1/10W-J-06	EA	1	NO
4	0R348	Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-06	EA	1	NO
4	0R349	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA	1	NO
4	0R350	YES	10	6252330156	RES. CHIP-R-KOHM-3.3-1/10W-J-6	EA	1	NO
4	0R351	Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-060	EA	1	NO
4	0R352	Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-060	EA	1	NO
4	0R353	No	10	6252015056	RES. CHIP-R-OHM-15-1/10W-J-SMD	EA	1	NO
4	0R354	No	10	6252015056	RES. CHIP-R-OHM-15-1/10W-J-SMD	EA	1	NO
4	0R355	Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-060	EA	1	NO
4	0R356	Yes	10	6252100356	RES. CHIP-R-KOHM-100-1/10W-J-0	EA	1	NO
4	0R357	Yes	10	6252100356	RES. CHIP-R-KOHM-100-1/10W-J-0	EA	1	NO
4	0R358	Yes	10	6252100356	RES. CHIP-R-KOHM-100-1/10W-J-0	EA	1	NO
4	0R359	Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-06	EA	1	NO
4	0R360	Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-06	EA	1	NO
4	0R361	Yes	10	6252000056	RES. CHIP-R-OHM-0-1/10W-J-0603	EA	1	NO
4	0R362	No	10	6252015056	RES. CHIP-R-OHM-15-1/10W-J-SMD	EA	1	NO
4	0R363	YES	10	6252470256	RES. CHIP-R-KOHM-47-1/10W-J-60	EA	1	NO
4	0R364	YES	10	6252470256	RES. CHIP-R-KOHM-47-1/10W-J-60	EA	1	NO
4	0R365	Yes	10	6252000056	RES. CHIP-R-OHM-0-1/10W-J-0603	EA	1	NO
4	0R366	Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-06	EA	1	NO
4	0R367	Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-060	EA	1	NO
4	0R368	Yes	10	6252150056	RES. CHIP-R-OHM-150-1/10W-J-06	EA	1	NO
4	0R369	Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-060	EA	1	NO
4	0R370	Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-060	EA	1	NO
4	0R371	YES	10	6252100156	RES. CHIP-R-KOHM-1-1/10W-J-603	EA	1	NO
4	CM301	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	CM302	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	CM303	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	CM304	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	CM305	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	CM306	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA	1	NO
4	FB301	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
4	FB302	Yes	10	6881101108	CORE-BEAD-WB201209F050QST--WLS	EA	1	NO
4	FB303	Yes	10	6881101108	CORE-BEAD-WB201209F050QST--WLS	EA	1	NO
4	FB304	Yes	10	6881101108	CORE-BEAD-WB201209F050QST--WLS	EA	1	NO
4	FB305	Yes	10	6881601578	CORE-BEAD-SBK160808T-300Y-S--C	EA	1	NO
4	FB306	Yes	10	6881601578	CORE-BEAD-SBK160808T-300Y-S--C	EA	1	NO
4	FB307	Yes	10	6881601578	CORE-BEAD-SBK160808T-300Y-S--C	EA	1	NO
4	FB308	YES	10	6881101928	CORE-BEAD-WB201209B401QNT WLSN	EA	1	NO
4	FB309	YES	10	6881101928	CORE-BEAD-WB201209B401QNT WLSN	EA	1	NO
4	FB311	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
4	FB312	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
4	FB313	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
4	FB314	Yes	10	6881102068	CORE-BEAD-FCM2012 C-501T03-SMD	EA	1	NO
4	FB315	Yes	10	6881102068	CORE-BEAD-FCM2012 C-501T03-SMD	EA	1	NO
4	FB316	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
4	FB317	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
4	FB318	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
4	FB319	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
4	FB320	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
4	FB321	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
4	FB322	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
4	FB323	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
4	FB324	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
4	FB325	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
4	FB326	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
4	FB328	YES	10	6881601378	CORE-BEAD-SBK160808T-600Y-S--C	EA	1	NO
4	FB329	YES	10	6881601378	CORE-BEAD-SBK160808T-600Y-S--C	EA	1	NO
4	FB330	YES	10	6881601378	CORE-BEAD-SBK160808T-600Y-S--C	EA	1	NO
4	I303B	Yes	10	6626440020	SOCKET-IC-8111-44TAB2-44P-PLCC	EA	1	NO
4	RP300	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J	EA	1	NO
4	RP301	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J	EA	1	NO
4	RP302	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J	EA	1	NO
4	RP303	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J	EA	1	NO
4	RP304	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J	EA	1	NO
4	RP305	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J	EA	1	NO
4	RP306	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J	EA	1	NO
4	RP307	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J	EA	1	NO
4	RP308	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J	EA	1	NO
4	RP309	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J	EA	1	NO
4	RP310	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J	EA	1	NO
4	RP311	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J	EA	1	NO

4	RP312	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1		NO
4	RP313	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1		NO
4	RP314	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1		NO
4	RP315	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1		NO
4	RP316	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1		NO
4	RP317	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1		NO
4	RP318	Yes	10	6261032818	RES. FRN-KOHM-10-1/16W-J		EA	1		NO
4	RP319	Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J		EA	1		NO
4	RP320	Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J		EA	1		NO
4	U1226	No	10	6832122600-02	PCB-INTERFACE BD-PTB-1226-02		EA	1		YES
3	0C331	Yes	10	6311210169	CAP. ALU-uF-100-16V-F-105C-6X7		EA	1		NO
3	0C342	Yes	10	6311122149	CAP. ALU-uF-220-10V-NF-105C-8X		EA	1		NO
3	0C376	Yes	10	6311110299	CAP. ALU-uF-1000-10V-F-105-10X		EA	1		NO
3	0C384	Yes	10	6311122149	CAP. ALU-uF-220-10V-NF-105C-8X		EA	1		NO
3	0C390	Yes	10	6311368149	CAP. ALU-uF-680-25V-NF-105C-10		EA	1		NO
3	0C393	Yes	10	6311110299	CAP. ALU-uF-1000-10V-F-105-10X		EA	1		NO
3	0C395	Yes	10	6310168148	ALUMINATOR-uF-680-10V--105C-10		EA	1		NO
3	0C397	Yes	10	6310168148	ALUMINATOR-uF-680-10V--105C-10		EA	1		NO
3	0C406	Yes	10	6311210169	CAP. ALU-uF-100-16V-F-105C-6X7		EA	1		NO
3	0C408	Yes	10	6311210169	CAP. ALU-uF-100-16V-F-105C-6X7		EA	1		NO
3	0D300	Yes	10	6442001345	IC-LINEAR-KA431AZ-3PIN-TO-92 T		EA	1		NO
3	0I303	Yes	10	6448014808	IC-CPU-W78E62BP-40-44P-PLCC-WI		EA	1		NO
3	0L300	Yes	10	6111307130	COIL CHOKE--uH-3-K-DRWW6x8G3-		EA	1		NO
3	0L301	Yes	10	6111307130	COIL CHOKE--uH-3-K-DRWW6x8G3-		EA	1		NO
3	0P301	Yes	10	6613090010	PLUG-09P-2.0mm-JWT-A2001WV2-09		EA	1		NO
3	0P302	Yes	10	6613140020	PLUG-14P-2.0mm-A200/WV2-14P-JW		EA	1		NO
3	0P305	Yes	10	6613100020	PLUG-10P-2.0mm-A2001WV2-10-JWT		EA	1		NO
3	0P306	Yes	10	6613070020	PLUG-7P-2.0mm-A2001WV2-07-JWT		EA	1		NO
3	0X300	Yes	10	6449003410	CRYSTAL-12.000MHZ-AT-49-KDS-		EA	1		NO
3	0X301	Yes	10	6449003410	CRYSTAL-12.000MHZ-AT-49-KDS-		EA	1		NO
3	I303A	No	10	9083000189-00	F/W-H15AAU-LITEON-M100		EA	1		NO
2	0	No	10	5113800005	FUNCTION KEY BD-GGC150ATA(99)-		EA	1		NO
3	0C601	No	10	6341410482	CAP. MC-uF-0.1-50V-Z-Y5V-F-P=5		EA	1		NO
3	0C602	No	10	6341410482	CAP. MC-uF-0.1-50V-Z-Y5V-F-P=5		EA	1		NO
3	0C603	No	10	6341410482	CAP. MC-uF-0.1-50V-Z-Y5V-F-P=5		EA	1		NO
3	0C604	No	10	6341410482	CAP. MC-uF-0.1-50V-Z-Y5V-F-P=5		EA	1		NO
3	0D600	Yes	10	6418002200	LED-LTL-30EDJ---LITE-ON-		EA	1		NO
3	0GND1	Yes	10	6714010551-31	HARNESS--1P-44mm-BD144+HSTUB--		EA	1		NO
3	0P601	Yes	10	6613080030	PLUG-8P-2.0mm-A2001WV2-08-JWT		EA	1		NO
3	0S601 51	YES	10	6853001110	SWITCH-TACT-TSAB-1-4PIN-BLK		EA	1		NO
3	0S601	YES	10	6853001100	SWITCH-TACT-SKHHAK2510-UE-BLK-		EA	1		YES
3	0S602 51	YES	10	6853001110	SWITCH-TACT-TSAB-1-4PIN-BLK		EA	1		NO
3	0S602	YES	10	6853001100	SWITCH-TACT-SKHHAK2510-UE-BLK-		EA	1		YES
3	0S603 51	YES	10	6853001110	SWITCH-TACT-TSAB-1-4PIN-BLK		EA	1		NO
3	0S603	YES	10	6853001100	SWITCH-TACT-SKHHAK2510-UE-BLK-		EA	1		YES
3	0S604 51	YES	10	6853001110	SWITCH-TACT-TSAB-1-4PIN-BLK		EA	1		NO
3	0S604	YES	10	6853001100	SWITCH-TACT-SKHHAK2510-UE-BLK-		EA	1		YES
3	0S605 51	YES	10	6853001110	SWITCH-TACT-TSAB-1-4PIN-BLK		EA	1		NO
3	0S605	YES	10	6853001100	SWITCH-TACT-SKHHAK2510-UE-BLK-		EA	1		YES
3	9N005	No	10	1250000100	OIL HOUSE-SOLDER BAR ADEPTO S6			1	0,004	NO
3	9N010	No	10	1250000130	WIRE-SOLDER-ADEPO S60A--			kg	0,00001	NO
3	9N015	No	10	1250000143	WIRE-SOLDER-SUPER--			EA	0,0004	NO
3	9N025	No	10	1250000221	FLUX-RF800T3-LONCO			GL	0,004	NO
3	9N030	No	10	1250000321	OIL HOUSE-THINNER LONCO RF800A			GL	0,0005	NO
3	9N066	No	10	1250200223	OIL HOUSE-PREVENTOR 500--			EA	0,00005	NO
3	9N080	Yes	10	1240000423	TAPE--50Mx508mmx0055mm-PCK-			RL	0,00005	NO
3	U1220	No	10	6832122000-01	PCB-CONTROL BD-PTB-1220			EA	1	YES
2	0	No	10	5114100025	AUDIO BD-H15AAU(9)-#-U-1-(K)-N			EA	1	NO
3	0	No	10	5714100025	AI-AUDIO BD-H15AAU(9)-#-U-1-(K			EA	1	NO
3	02U01	Yes	10	1241000200	LABEL-DATE CODE-----	8340000485	EA	1		NO
3	9N010	No	10	1250000130	WIRE-SOLDER-ADEPO S60A--			kg	0,00001	NO
3	9N020	No	10	1250000141	WIRE-SOLDER-12M/M--			kg	0,00003	NO
3	9N025	No	10	1250000221	FLUX-RF800T3-LONCO			GL	0,004	NO
3	9N030	No	10	1250000321	OIL HOUSE-THINNER LONCO RF800A			GL	0,0005	NO
3	9N066	No	10	1250200223	OIL HOUSE-PREVENTOR 500--			EA	0,00004	NO
3	9N070	No	10	1250000100	OIL HOUSE-SOLDER BAR ADEPTO S6			1	0,004	NO
3	I001A	No	10	1250000520	HEAT SINK-COMPOUND---			kg	0,001	NO
4	0C002	Yes	30	6338110485	CAP. CD-UF-0.1-50V-Z-T--Y5V-		EA	1		NO
4	0C003	Yes	30	6311347145	ALUMINATOR-uF-470-25V-T-105C-1		EA	1		NO
4	0C004	YES	30	6341210415	CAP. MC-uF-0.1-50V-K-X7R-T		EA	1		NO
4	0C010	Yes	30	6311310145	ALUMINATOR-uF-100-25V-T-105C-6		EA	1		NO
4	0C015	Yes	30	6338110485	CAP. CD-UF-0.1-50V-Z-T--Y5V-		EA	1		NO
4	0C040	Yes	20	6311547974	CAP. ALU-uF-4.7-50V-T-105C-6.3		EA	1		NO
4	0C041	Yes	20	6311547974	CAP. ALU-uF-4.7-50V-T-105C-6.3		EA	1		NO
4	0C042	Yes	30	6311347145	ALUMINATOR-uF-470-25V-T-105C-1		EA	1		NO
4	0C043	Yes	30	6311347145	ALUMINATOR-uF-470-25V-T-105C-1		EA	1		NO
4	0C044	Yes	30	6338110485	CAP. CD-UF-0.1-50V-Z-T--Y5V-		EA	1		NO
4	0D002	Yes	20	6412010907	DIODE--LT2A06-2A/800V-T52--		EA	1		NO
4	0D003	Yes	20	6412010907	DIODE--LT2A06-2A/800V-T52--		EA	1		NO
4	0J001	Yes	20	6700060000	JUMPER WIRE-			kg	0,00009	NO
4	0J002	Yes	20	6700060000	JUMPER WIRE-			kg	0,00009	NO
4	0J003	Yes	20	6700060000	JUMPER WIRE-			kg	0,00009	NO
4	0R003	No	20	6224618034	RES. MF-KOHM-180-1/4W-F-T26		EA	1		NO
4	0R004	No	20	6212130457	RES. CF-KOHM-300-1/4W-J-T52-MI		EA	1		NO
4	0R040	Yes	20	6212110254	RES. CF-KOHM-1-1/4W-J-T26-MINI		EA	1		NO
4	0R041	Yes	20	6212110254	RES. CF-KOHM-1-1/4W-J-T26-MINI		EA	1		NO
4	0R042	Yes	20	6212147354	RES. CF-KOHM-47-1/4W-J-T26-MIN		EA	1		NO
4	0R043	Yes	20	6212147354	RES. CF-KOHM-47-1/4W-J-T26-MIN		EA	1		NO
4	0R045	Yes	20	6212110354	RES. CF-KOHM-10-1/4W-J-T26-MIN		EA	1		NO
4	U1227	No	10	6832122700-01	PCB-AUDIO BD-PTB-1227-01		EA	1		YES
3	0I001	Yes	10	6442023100	IC-Linear-TDA7496L-20P-PDIP-SG		EA	1		NO
3	0L001	Yes	10	6111456131	COIL CHOKE--uH-45-K-DRWW10x10L		EA	1		NO
3	0P001	Yes	10	6613070020	PLUG-7P-2.0mm-A2001WV2-07-JWT		EA	1		NO
3	0P003	Yes	10	6627002000	JACK-PHONE---MSJ-035-12D PC BL		EA	1		NO
3	I001M	No	10	7746402571-0A	HEAT SINK--GC150ATA-AL-CLEAN	8440003873	EA	1		NO
3	JK011	Yes	10	6627002000	JACK-PHONE---MSJ-035-12D PC BL		EA	1		NO
2	0	No	10	5114300003	CONTROL BD-POWER-GGC150ATA(99)		EA	1		NO
3	0	No	10	5714300003	AI-POWER BD-GGC150ATA(99)-#-E-		EA	1		NO
3	02U04	Yes	10	1241000200	LABEL-DATE CODE-----	8340000485	EA	1		NO

3	9N005	No	10	1250000130	WIRE-SOLDER-ADEPO S60A--		kg	0,0007	NO
3	9N010	No	10	1250000100	OIL HOUSE-SOLDER BAR ADEPTO S6		l	0,01	NO
3	9N015	No	10	1250000141	WIRE-SOLDER-12M/M--		kg	0,00075	NO
3	9N020	No	10	1250000321	OIL HOUSE-THINNER LONCO RF800A		GL	0,003	NO
3	9N025	No	10	1250000221	FLUX-RF800T3-LONCO		GL	0,0003	NO
3	Q803C	No	10	1250000520	HEAT SINK-COMPOUND---		kg	0,00005	NO
3	Q803K	No	10	1250000415	OIL HOUSE-VA-450 SCREW LOCKING		kg	0,00001	NO
4	0C807	Yes	30	6311347045	ALUMINATOR-UF-47-25V-T-105C-5*		EA	1	NO
4	0C810	Yes	30	6338110485	CAP. CD-UF-0.1-50V-Z-T--Y5V-		EA	1	NO
4	0C811	Yes	30	6335110215	CAP. CD-PF-1000-50V-K-T--Y5P-		EA	1	NO
4	0C812	Yes	30	6338110485	CAP. CD-UF-0.1-50V-Z-T--Y5V-		EA	1	NO
4	0C813	Yes	30	6335110315	CAP. CD-UF-0.01-50V-K-T--Y5P-		EA	1	NO
4	0C814	Yes	30	6311510045	ALUMINATOR-uF-10-50V-T-105C-5x		EA	1	NO
4	0C815	Yes	30	6356110455	CAP. MEM-uF-0.1-50V-J-T--MATSU		EA	1	NO
4	0C816	Yes	30	6338210215	CAP. CD-pF-1000-100V-K-T--X7R-		EA	1	NO
4	0C817	Yes	30	6311347145	ALUMINATOR-uF-470-25V-T-105C-1		EA	1	NO
4	0C818	Yes	30	6311347145	ALUMINATOR-uF-470-25V-T-105C-1		EA	1	NO
4	0C820	Yes	30	6338110485	CAP. CD-UF-0.1-50V-Z-T--Y5V-		EA	1	NO
4	0C821	Yes	30	6338210215	CAP. CD-pF-1000-100V-K-T--X7R-		EA	1	NO
4	0C822	Yes	30	6311347195	CAP. ALU-uF-470-25V-T-105C-10X		EA	1	NO
4	0C824	Yes	10	6311210245	ALUMINATOR-uF-1000-16V-T-105C-		EA	1	NO
4	0C826	Yes	30	6338110485	CAP. CD-UF-0.1-50V-Z-T--Y5V-		EA	1	NO
4	0C827	Yes	30	6356110455	CAP. MEM-uF-0.1-50V-J-T--MATSU		EA	1	NO
4	0C831	Yes	30	6311322045	ALUMINATOR-uF-22-25V-T-105C-5x		EA	1	NO
4	0D803	Yes	20	6412007927	DIODE--FUF4006AMP-1A/800V-T52-		EA	1	NO
4	0D804	Yes	20	6412012317	DIODE--FUF4005AMP-1A/600V-T52-		EA	1	NO
4	0D806	Yes	20	6412001707	DIODE--1N4148--T52--NS		EA	1	NO
4	0I803	Yes	30	6442001345	IC-LINEAR-KA431AZ-3PIN-TO-92 T		EA	1	NO
4	0J801	Yes	10	6700060000	JUMPER WIRE-		kg	0,00009	NO
4	0Q806 51	Yes	30	6423000205	TRANSISTOR-PNP-KSA733C-G-TA--F		EA	1	NO
4	0Q806	Yes	30	6423000045	TRANSISTOR-PNP-2SA733P-T-TAPIN		EA	1	NO
4	0R801	YES	10	6221147457	RES. MOF-KOHM-470-1W-J-AT52-		EA	1	NO
4	0R807	Yes	20	6212147954	RES. CF-OHM-4.7-1/4W-J-T26-MIN		EA	1	NO
4	0R808	Yes	20	6212151354	RES. CF-KOHM-51-1/4W-J-T26-MIN		EA	1	NO
4	0R810	Yes	20	6212139254	RES. CF-KOHM-3.9-1/4W-J-T26-MI		EA	1	NO
4	0R812	Yes	20	6212120354	RES. CF-KOHM-20-1/4W-J-T26-MIN		EA	1	NO
4	0R813	Yes	20	6212122157	RES. CF-OHM-220-1/4W-J-T52-MIN		EA	1	NO
4	0R814	Yes	20	6212147054	RES. CF-OHM-47-1/4W-J-T26-MINI		EA	1	NO
4	0R815	Yes	20	6212110257	RES. CF-KOHM-1-1/4W-J-T52-MINI		EA	1	NO
4	0R817	Yes	20	6212147254	RES. CF-KOHM-4.7-1/4W-J-T26-MI		EA	1	NO
4	0R818	Yes	20	6212151354	RES. CF-KOHM-51-1/4W-J-T26-MIN		EA	1	NO
4	0R819	Yes	20	6212151254	RES. CF-KOHM-5.1-1/4W-J-T26-MI		EA	1	NO
4	0R820	Yes	20	6212110254	RES. CF-KOHM-1-1/4W-J-T26-MINI		EA	1	NO
4	0R823	Yes	20	6212127154	RES. CF-OHM-270-1/4W-J-T26-MIN		EA	1	NO
4	0R824	Yes	20	6212127254	RES. CF-KOHM-2.7-1/4W-J-T26-MI		EA	1	NO
4	0R825	Yes	20	6212110354	RES. CF-KOHM-10-1/4W-J-T26-MIN		EA	1	NO
4	0R826	Yes	20	6212110254	RES. CF-KOHM-1-1/4W-J-T26-MINI		EA	1	NO
4	0R827	Yes	20	6212120254	RES. CF-KOHM-2-1/4W-J-T26-MINI		EA	1	NO
4	0R832	Yes	20	6212151254	RES. CF-KOHM-5.1-1/4W-J-T26-MI		EA	1	NO
4	P801C	No	10	7740200700-0B	RIVET-EYELET-2.0-FOR NEC	8440002446	EA	1	NO
4	P801D	No	10	7740200700-0B	RIVET-EYELET-2.0-FOR NEC	8440002446	EA	1	NO
4	U1218	No	10	6832121800-03	PCB-POWER BD-PTB-1218-03	8812180000	EA	1	YES
4	ZD801	YES	20	6414180074	DIODE-ZENER-GDZJ18B-T/B--T26--		EA	1	NO
3	0C801	Yes	10	6328833419	CAP. X2-MPP-uF-0.33-275V-K--P=		EA	1	YES
3	0C802	Yes	10	6328810419	CAP. X2-MEF-uF-0.1-275V-K--P=1		EA	1	YES
3	0C803 51	Yes	10	6302122272	CAP. CD-pF-2200-250V-M-F-7.5-Y		EA	1	YES
3	0C803	YES	10	6302122292	CAP. CD-pF-2200-250V-M-F-7.5-Y		EA	1	YES
3	0C804 51	Yes	10	6302122272	CAP. CD-pF-2200-250V-M-F-7.5-Y		EA	1	YES
3	0C804	YES	10	6302122292	CAP. CD-pF-2200-250V-M-F-7.5-Y		EA	1	YES
3	0C805	Yes	10	6312610141	CAP. ALU-uF-100-400V-NF-105C-1		EA	1	NO
3	0C806	YES	10	6336510307	CAP. CD-uF-0.01-1000V-M-Z5U-F-		EA	1	NO
3	0C828 51	Yes	10	6302410242	CAP. CD-pF-1000-250V-M-F-10-SY		EA	1	YES
3	0C828	YES	10	6302410262	CAP. CD-pF-1000-250V-M-F-P=10-		EA	1	YES
3	0D801	YES	10	6417001400	DIODE-BRIDGE-KBP205G-2A/600V--		EA	1	NO
3	0D809	Yes	10	6412020007	DIODE--SF34-3A/200V-T52--TSC		EA	1	NO
3	0D810	YES	10	6412015817	DIODE-SWITCHING-SB360-3A/60V-T		EA	1	NO
3	0F801	YES	10	6851031550	FUSE-TIME LAG-3.15A/250V---LIT		EA	1	YES
3	0G801	Yes	10	7748000190-0A	GROUNDING-CONNECTOR-MTS-C150AT	8440003377	EA	1	NO
3	0I801	Yes	10	6442022010	IC-Lincar-KA3842AE-S-8P-PDIP-F		EA	1	NO
3	0I802	Yes	10	6442014000	IC-Lincar-LTV-817D-4P-PDIP-LIT		EA	1	YES
3	0L802	Yes	10	6111336131	COIL CHOKE--uH-33-K-DRWW10x10L		EA	1	NO
3	0P801	YES	10	6621030090	AC INLET-3P-INALWAYS-AS0707-1-		EA	1	YES
3	0P802	YES	10	6711100140-00	HARNESS-10P-70mm-2.0 1007#26-3		EA	1	NO
3	0P803	YES	10	6711060400-00	HARNESS-6P-2.0-100mm-1007#26--		EA	1	NO
3	0Q803	YES	10	6426008700	FET-N-CHNL-SSS4N60AS-2.3A/600V		EA	1	NO
3	0R802	Yes	10	6201080012	THERMISTOR-OHM-8-3A-P=5-SCK-08		EA	1	YES
3	0R803	Yes	10	6221210452	RES. MOF-KOHM-100-2W-J-HOR-		EA	1	NO
3	0R805	Yes	10	6221210452	RES. MOF-KOHM-100-2W-J-HOR-		EA	1	NO
3	0R806	Yes	10	6221333352	RES. MOF-KOHM-33-3W-J-HOR-		EA	1	NO
3	0R811	Yes	10	6221112952	RES. MOF-OHM-1.2-1W-J-HOR-		EA	1	NO
3	0R833	Yes	10	6221112252	RES. MOF-KOHM-1.2-1W-J-HOR-		EA	1	NO
3	0T801	Yes	10	6138003000	LINE FILTER-TLF-1030-mH-10.5-E		EA	1	YES
3	0T802	Yes	10	6131052300	XFRMER-POWER-TPW-1085-ER-28S-L		EA	1	YES
3	9N081	No	10	6875000101	ADHESIVE-HOT MELT-11.3X300mm 1		lb	0,004	NO
3	F801A	Yes	10	6622050010	FUSE CLIP-FC-04 for D=5mm FUSE		EA	2	NO
3	I008N	Yes	10	7150130081-0A	SCREW-BTYPE--Round-M3-8-Zn	8440003300	EA	1	NO
3	P801A	YES	10	6714010601-20	HARNESS-1P-40mm-1015#18-Y/G-1.		EA	1	NO
3	P801B	Yes	10	6873050200	TUBE-HEAT-SHRINK-5D*L20MM 125		EA	1	NO
3	Q803M	Yes	10	7746402560-0A	HEAT SINK-POWER BD---		EA	1	NO
3	VR801	Yes	10	6245102003	VARIABLE-KOHM-1-0.3W-TA--6D--		EA	1	NO
2	A0002	No	10	9061300017-0C	SPEC.-INSP-H15AAU-LITEON		EA	1	NO
2	A0003	No	10	9042400017-0C	SPEC.-ENGI-H15AAU-LITEON		EA	1	NO
2	A0005	No	10	9081000328-0A	EDID-H15AAR-LITEON-		EA	1	NO
2	A0006	No	10	9084000020-0B	SPEC.-SAFETY-H15AAU-LITEON		EA	1	NO
1	0	No	20	5112400131	PACKING ASS'Y-H15AAU(9)-#-E-2-		EA	1	NO
2	00PWR	Yes	20	6716000200	CABLE-POWER --1800mm -BLACK-EU		EA	1	YES
2	01P41	Yes	20	1240000406	TAPE-PACKING-30"WX914MLX0065--		lb	0,002	NO
2	01P42	Yes	20	1240000407	TAPE-PACKING-30"W* 50ML*0065--		EA	0,03	NO
2	01P43	Yes	20	1120000611	TAPE-MASKING---		RL	0,002	NO

2	01P44	Yes	20	1120000623	TAPE-FILAMENT-TAPE--		RL	0,01	NO
2	01P55	No	20	1240000302	OIL HOUSE-TAPE-STRAPPING--		EA	0,0002	NO
2	01P56	No	20	1241000011	TAPE-PACKING-FILM STRETCH WRAP		RL	0,002	NO
2	0AUDA	Yes	20	6710010080	CABLE--D3.5PLUGx2AUDIO-1800mm-		EA	1	YES
2	0Y001	No	20	7730302456-0B	MANUAL-ASS'Y-NON BRAND-H15AAU/		EA	1	NO
3	0Y0A1	No	1	7730113562-0B	MANUAL-NON BRAND-H15AAU/ANU-EU		EA	1	NO
3	0Y0B1	No	1	7730202322-0A	DISKETTE--NON BRAND-HU150ATA--		EA	1	NO
2	01P11	No	20	7749205420-0A	CARTON-N/B-GC150ATA--EUREKA-10	8340002749	EA	1	NO
2	01P21	No	20	7749102970-0C	CUSHION-FOAM-EPS-EUREKA-1040sc	8340002743	PR	1	NO
2	01P31	Yes	20	7749000820-0B	BAG-PE-ORDINARY-ALL MODEL (LCD	8340001542	EA	1	NO
2	01P32	No	20	7749000200-0D	BAG-PE-ORDINARY-ALL MODEL-L250	8440000038	EA	1	NO
2	01P33	Yes	20	7740100200	CLAMP-CABLE-WIRING CABLE TIE-N	8440000046	EA	1	NO
2	01P51	No	20	7749500460-0A	PALLET-FOUR-WAY-1110x915x115mm	8340001979	EA	0,025	NO
2	01P52	No	20	7749401330-0A	BOARD-PAPER BOARD-1010x860x4mm	8340000797	EA	0,05	NO
2	01P54	Yes	20	7749401160-0A	BOARD-CORNER PAPER-50x50x800mm	8440001757	EA	0,05	NO
2	01P78	Yes	20	7735419690	LABEL-BARCODE LABEL -MITSUBISJ	8440002835	EA	1	NO
2	02B01	Yes	20	7735425062-0A	LABEL-MODEL LABEL-LITEON--H15A	8440003939	EA	1	YES
2	02B02	Yes	20	7735424925-0A	LABEL-AUDIO INPUT LABEL-ALL-GC	8440003890	EA	1	NO
2	0T003	No	1	8340002743	TOOLING-LCD-CUSHION-FOAM-EUREK		EA	1	NO

LITEON

H15AAU# MASCOTII+VITESSE2

SCHEMATIC REV 02 PTB-1226

14th NOV 2001

ROAD MAP

DESCRIPTION	SHEET NO.
SCALER	1
A-D CONVERTER	2
MICROCONTROLLER	3
VGA INTERFACE	4
PANEL INTERFACE	5
POWER	6

REVISION HISTORY

REV.	DESCRIPTION	BY	LAST UPDATE
A	BASED ON MRT 'S SCHEMATICS	Frank	
B	1.R306 changed to Pin145(I300), 1/6	Frank	
	2.VDDCTRL, INV_EN changed to I300, 1/6	Frank	
	3. C414: 0.01uF->0.1uF, 1/6		
	4. Add FB327 ,CM301,CM302, 2/6		
	5. Add I310, I302->M51953A, D301&,D302 ->N.C, 3/6		
	6. DELETE R321, 3/6		
	7. R353->C413, R354->C416, C380->39pF, C381->5pF, 5/6		
	8. Pin8(I307)->fromVCC-P changed into VCC, 6/6		
	9. I309 AIC1720 ->AIC1722, 6/6		
	10.ADD CM303~CM306, 6/6		

REV.	DESCRIPTION	BY	LAST UPDATE
C	1. FB327->R367, DELETE FB300, C316&C317->N.C, 2/6	Frank	
	2. R329,R331 ->680 OHM, 3/6	Frank	
D	1. Add RP319~RP320		

Title
H15AAU

CONF[0..3]: I2C SLAVE ADDRESS
CONF4: LOW, SELECT I2C BUS
CONF5,6:[JP3,2)
CONF7:

MASCOT II

3,4,5,7 VCC3-DCV VCC3-DCV
R303 10K
R304 10K
R305 10K
R306 510
VDDCRTL
INV_EN
VOL-ADJ
VDDCRTL 4,6
INV_EN 7
RGB-B[0..23] 6
VCC3-DCV

3 CKREFO
4 IRQ-
3,4 SCL
3,4 SDA
4 RESET
3,4 SCL
3,4 SDA
R307 1M
X300 12MHZ
C300 15pF
C301 15pF
R308 33
R309 33

I300

160	159	158	157	156	155	154	153	152	151	150	149	148	147	146	145	144	143	142	141	140	139	138	137	136	135	134	133	132	131	130	129	128	127	126	125	124	123	122	121
DIBVSS	IRQ	CONF7	CONF6	CONF5	CONF4	CONF3	CONF2	CONF1	CONF0	OSD_I	OSD_B	OSD_G	OSD_R	VEE	VDD	DOBVSS	VBL	OSD_CLK	OSD_FSW	RB7	RB6	RB5	DOBVDD	RB4	RB3	DOBVSS	RB2	RB1	RB0	GB7	GB6	GB5	GB4	GB3	DOBVSS	GB2	GB1	GB0	DCVSS

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
DCVSS	RST	XTAL	XTALI	SCL	SDA	SCS	TVCLK	CAP_HREF	BIB0	BIB1	BIB2	BIB3	DIBVSS	BIB4	BIB5	DIBVDD	BIB6	BIB7	CAP_HSYNC	DCVDD	CAP_VSYNC	GIB0	GIB1

25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48
GIB2	GIB3	GIB4	GIB5	GIB6	GIB7	RIB0	RIB1	RIB2	RIB3	RIB4	RIB5	RIB6	RIB7	CLAMP	SHSYNCO	DCVSS	SVSYNCO	PCCLK	VGA_VSYNC	VGA_HSYNC	VGA_BLANK	RIA7	RIA6

49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72
RIA5	RIA4	RIA3	RIA2	RIA1	DIBVSS	RIA0	GIA7	DCVDD	GIA6	GIA5	GIA4	GIA3	GIA2	GIA1	GIA0	BIA7	BIA6	BIA5	BIA4	BIA3	BIA2	BIA1	BIA0

73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96
DOBVSS	DISP_DE	DISP_VSYNC	SHCLK	DOBVDD	ADVSS	ADVDD	DISP_HSYNC	DCVSS	BA0	BA1	BA2	DOBVSS	BA3	BA4	BA5	BA6	BA7	GA0	GA1	GA2	DOBVSS	GA3	GA4

97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120
DOBVDD	GA5	GA6	GA7	RA0	DCVDD	RA1	RA2	DOBVSS	RA3	RA4	RA5	RA6	RA7	BB0	BB1	BB2	DOBVSS	BB3	BB4	DOBVDD	BB5	BB6	BB7

RGB-B23
RGB-B22
RGB-B21
RGB-B20
RGB-B19
RGB-B18
RGB-B17
RGB-B16
RGB-A7
RGB-A6
RGB-A5
RGB-A4
RGB-A3
RGB-A2
RGB-A1
RGB-A0
RGB-A15
RGB-A14
RGB-A13
RGB-A12
RGB-A11
RGB-A10
RGB-A9
RGB-A8
RGB-A23
RGB-A22
RGB-A21
RGB-A20
RGB-A19
RGB-A18
RGB-A17
RGB-A16

RGB-A[0..23] 6

VCC3-DCV

PIN 17, 21, 57, 77, 79, 97, 102, 117,137

C302 C303 C304 C305 C306 C307 C308 C309 C310
0.1uF 0.1uF 0.1uF 0.1uF 0.1uF 0.1uF 0.1uF 0.1uF 0.1uF

7 VOLUME
47K R364
47K R363
VOL-ADJ
C415 0.01uF
C414 0.1uF

3 PACLK
5 PA-VSYNC
5 PA-HSYNC
3 RGB-INA[0..7]
3 RGB-INA[8..23]

RGB-INA7 RGB-INA6 RGB-INA5 RGB-INA4 RGB-INA3 RGB-INA2 RGB-INA1 RGB-INA0 RGB-INA15 RGB-INA14 RGB-INA13 RGB-INA12 RGB-INA11 RGB-INA10 RGB-INA9 RGB-INA8 RGB-INA23 RGB-INA22 RGB-INA21 RGB-INA20 RGB-INA19 RGB-INA18 RGB-INA17 RGB-INA16

DISP-HSYNC 6
SHCLK 6
DISP-VSYNC 6
DE 6

MEDIA REALITY TECHNOLOGY, INC TEL 408 774 1818 FAX 408 774 0355	767 N. MARY AVE. SUNNYVALE, CA 95086
Title: MASCOT II + VITESSE 2 (Beta 3)	Rev: 02
Document Description: MASCOT 2	
Date: Wednesday, December 26, 2001	Sheet 2 of 7

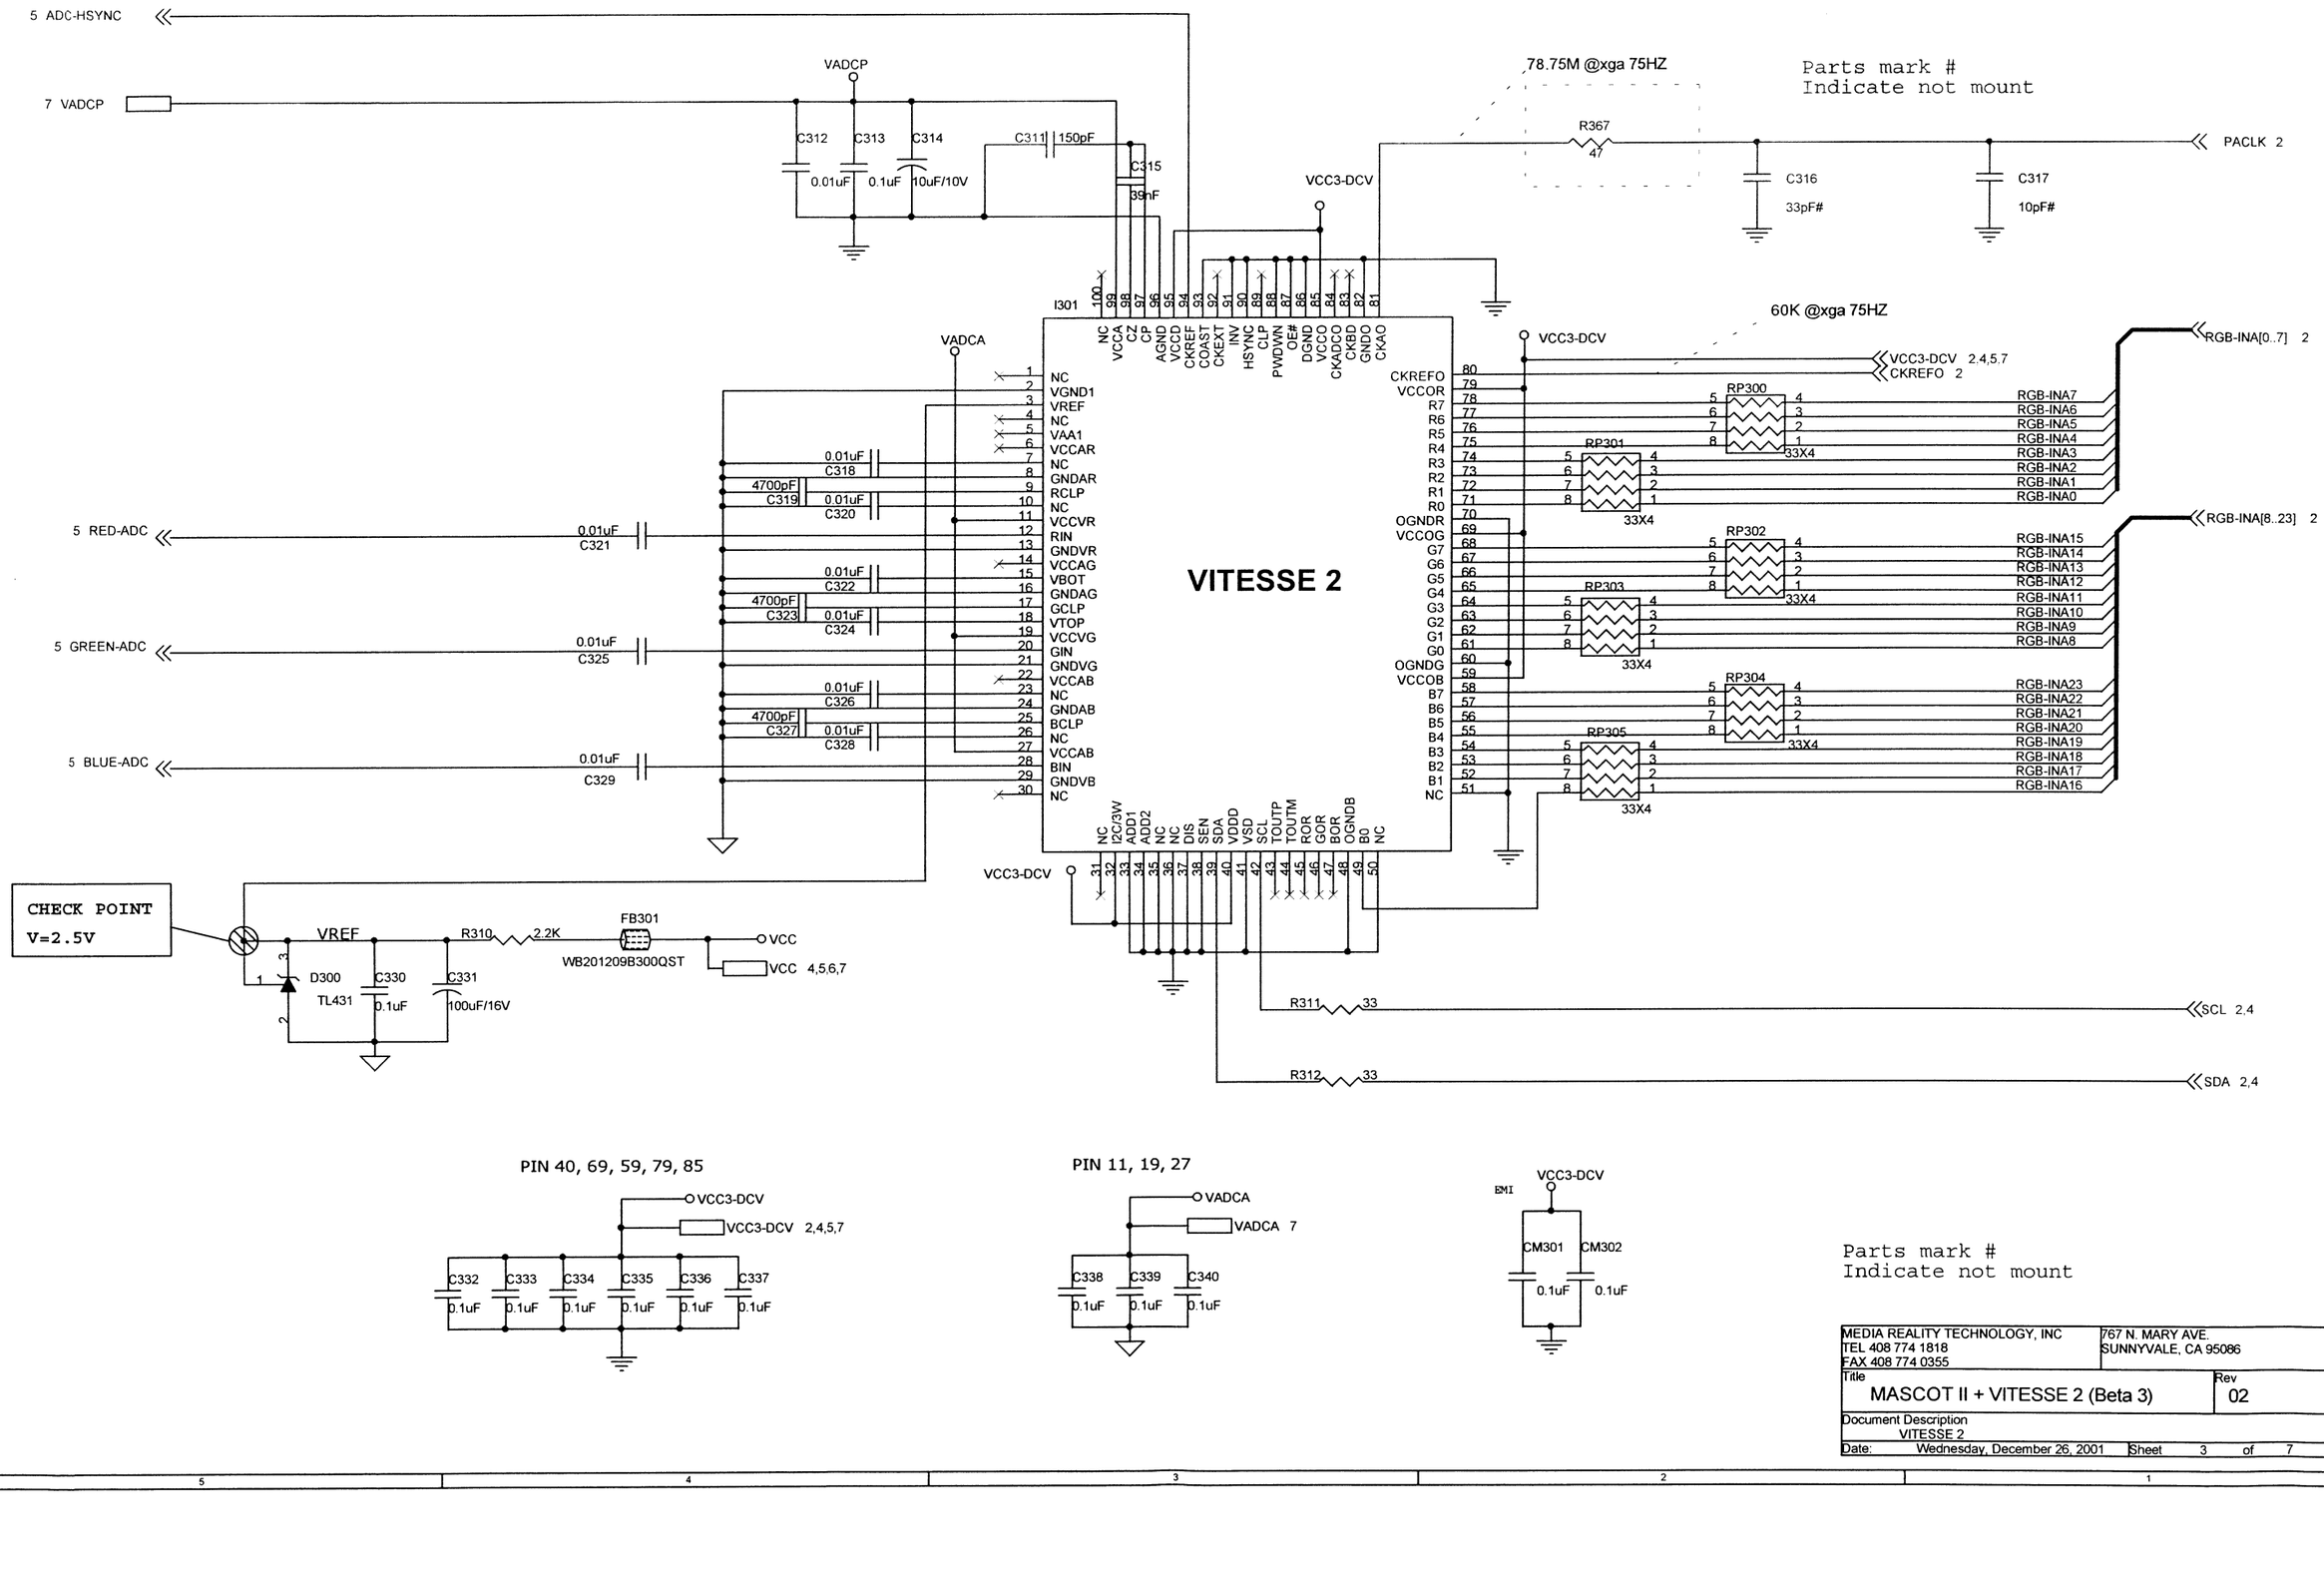
5 ADC-HSYNC
7 VADCP
VADCP
C312 0.01uF
C313 0.1uF
C314 10uF/10V
C311 150pF
C315 39nF
78.75M @xga 75HZ
R367 47
C316 33pF#
C317 10pF#
PACLK 2
Parts mark #
Indicate not mount
VCC3-DCV
I301
60K @xga 75HZ
VCC3-DCV 2,4,5,7
CKREFO 2
RGB-INA[0..7] 2
RGB-INA[8..23] 2
VADCA
5 RED-ADC
5 GREEN-ADC
5 BLUE-ADC
C318 0.01uF
C319 4700pF
C320 0.01uF
C321 0.01uF
C322 0.01uF
C323 4700pF
C324 0.01uF
C325 0.01uF
C326 0.01uF
C327 4700pF
C328 0.01uF
C329 0.01uF
VITESSE 2
RP300
RP301
RP302
RP303
RP304
RP305
33X4
CHECK POINT
V=2.5V
VREF
R310 2.2K
FB301
WB201209B300QST
VCC
VCC 4,5,6,7
D300 TL431
C330 0.1uF
C331 100uF/16V
R311 33
SCL 2,4
R312 33
SDA 2,4
PIN 40, 69, 59, 79, 85
VCC3-DCV 2,4,5,7
C332 0.1uF
C333 0.1uF
C334 0.1uF
C335 0.1uF
C336 0.1uF
C337 0.1uF
PIN 11, 19, 27
VADCA 7
C338 0.1uF
C339 0.1uF
C340 0.1uF
EMI
CM301 0.1uF
CM302 0.1uF
Parts mark #
Indicate not mount
MEDIA REALITY TECHNOLOGY, INC
TEL 408 774 1818
FAX 408 774 0355
767 N. MARY AVE.
SUNNYVALE, CA 95086
Title
MASCOT II + VITESSE 2 (Beta 3)
Rev 02
Document Description
VITESSE 2
Date: Wednesday, December 26, 2001
Sheet 3 of 7

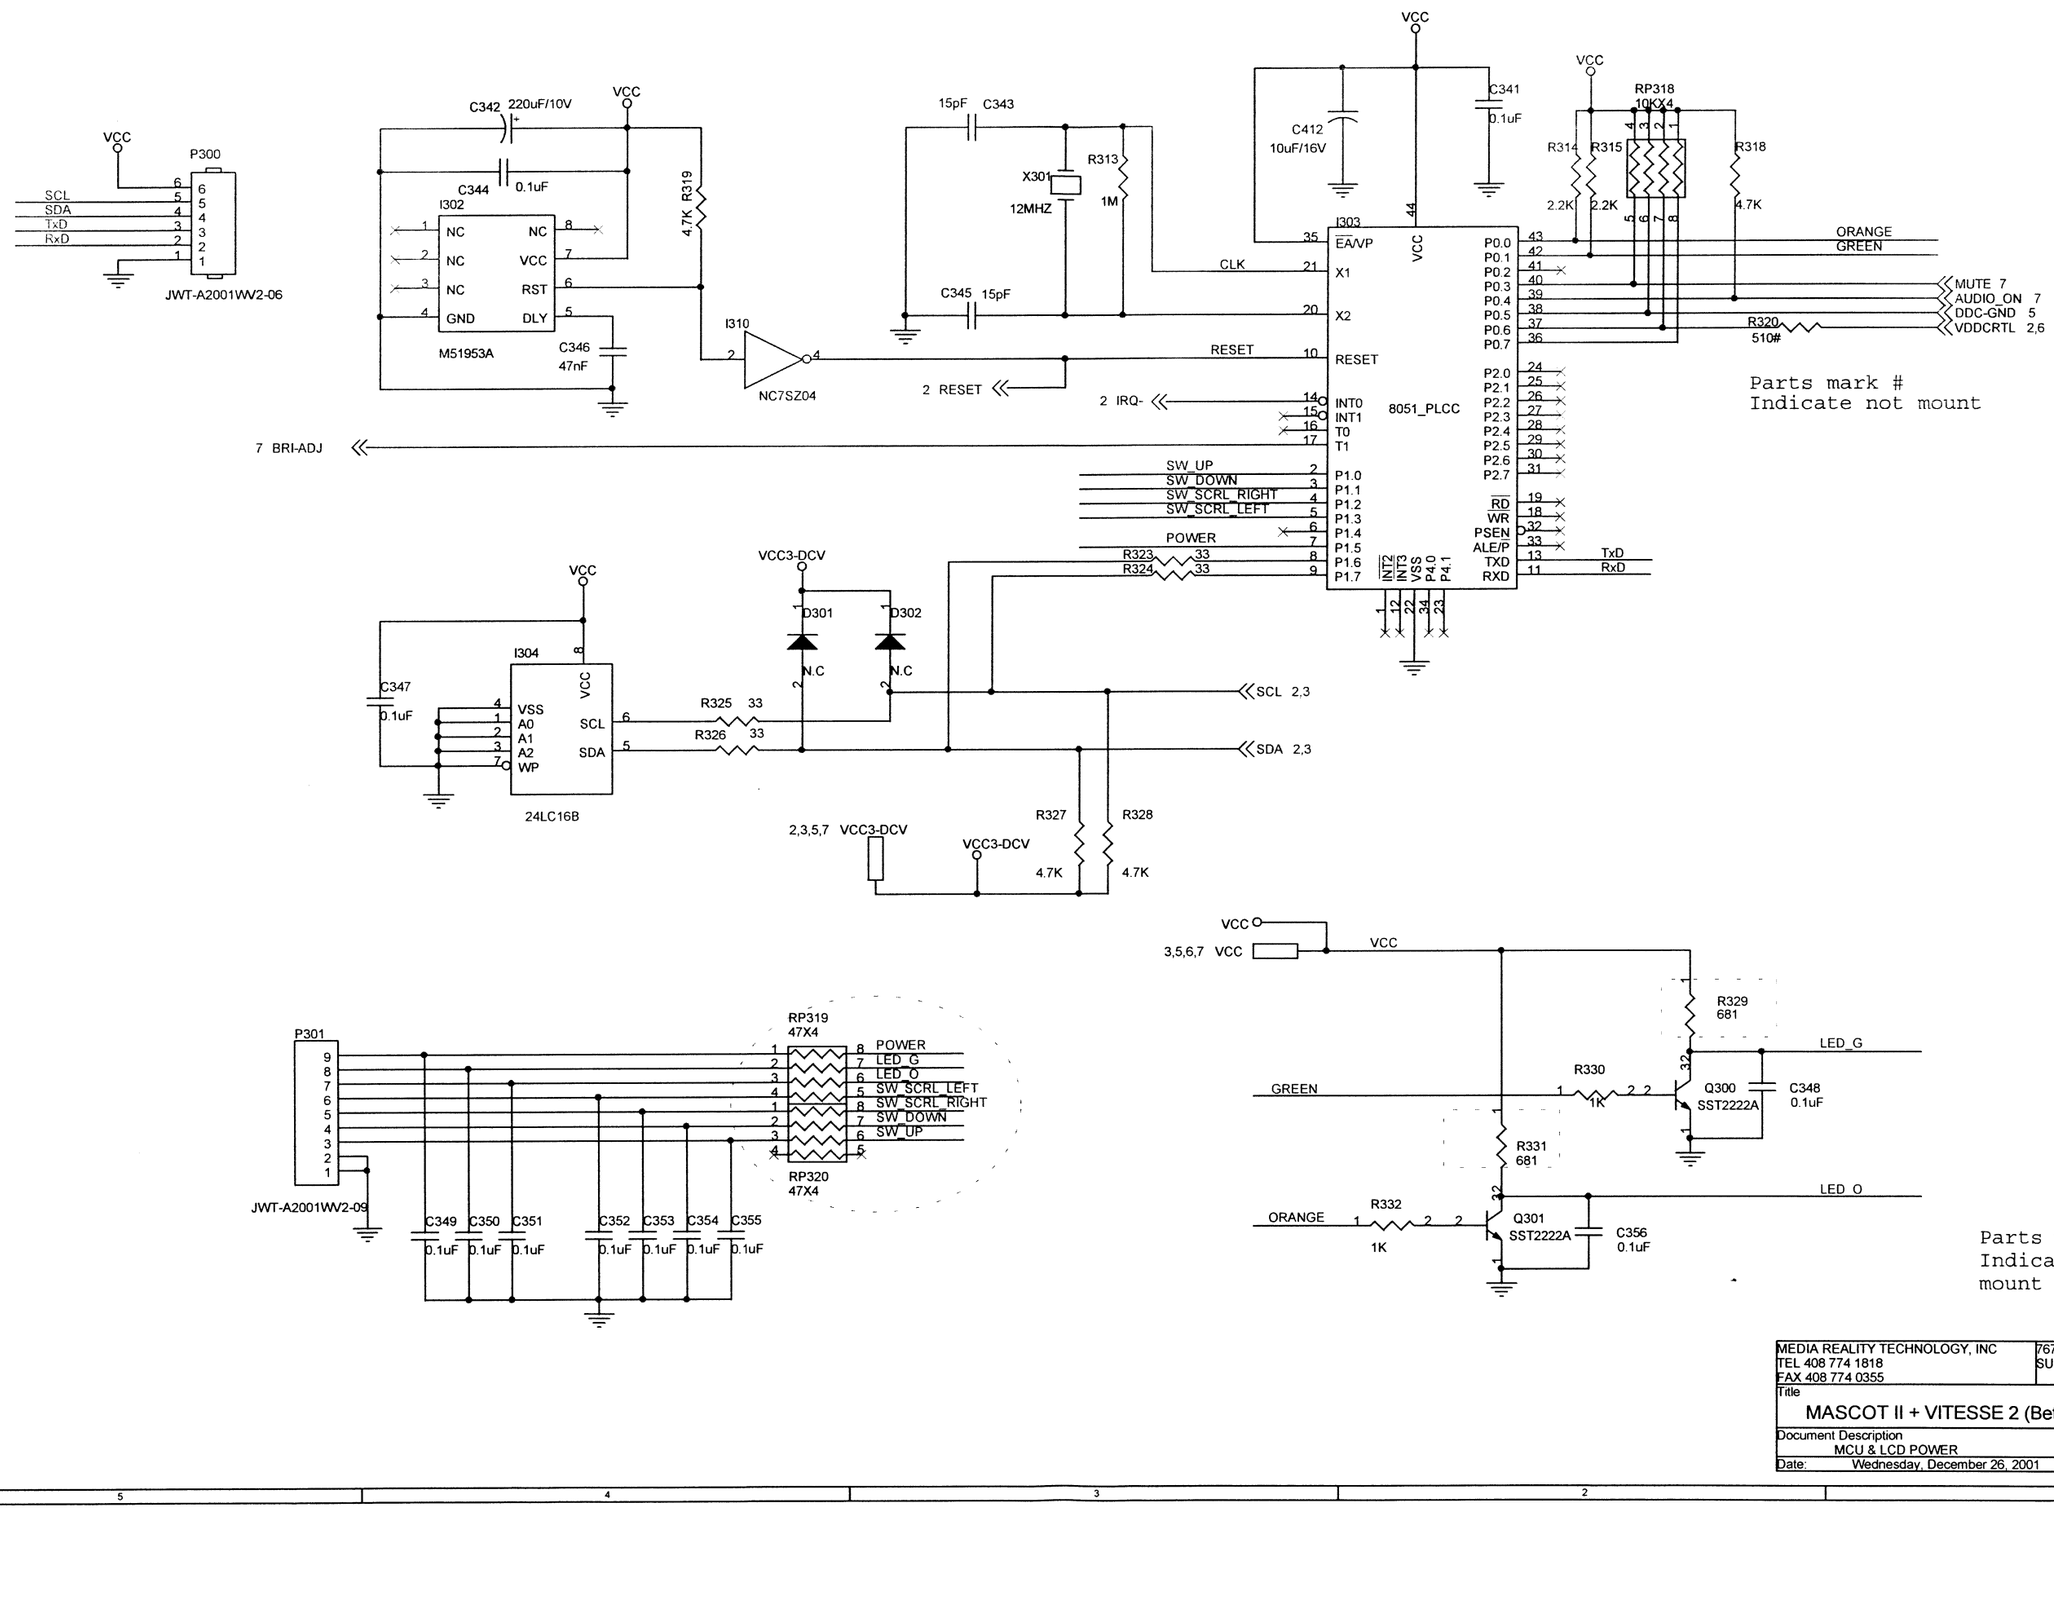

MEDIA REALITY TECHNOLOGY, INC TEL 408 774 1818 FAX 408 774 0355	767 N. MARY AVE. SUNNYVALE, CA 95086
Title: MASCOT II + VITESSE 2 (Beta 3)	Rev: 02
Document Description: MCU & LCD POWER	
Date: Wednesday, December 26, 2001	Sheet 4 of 7

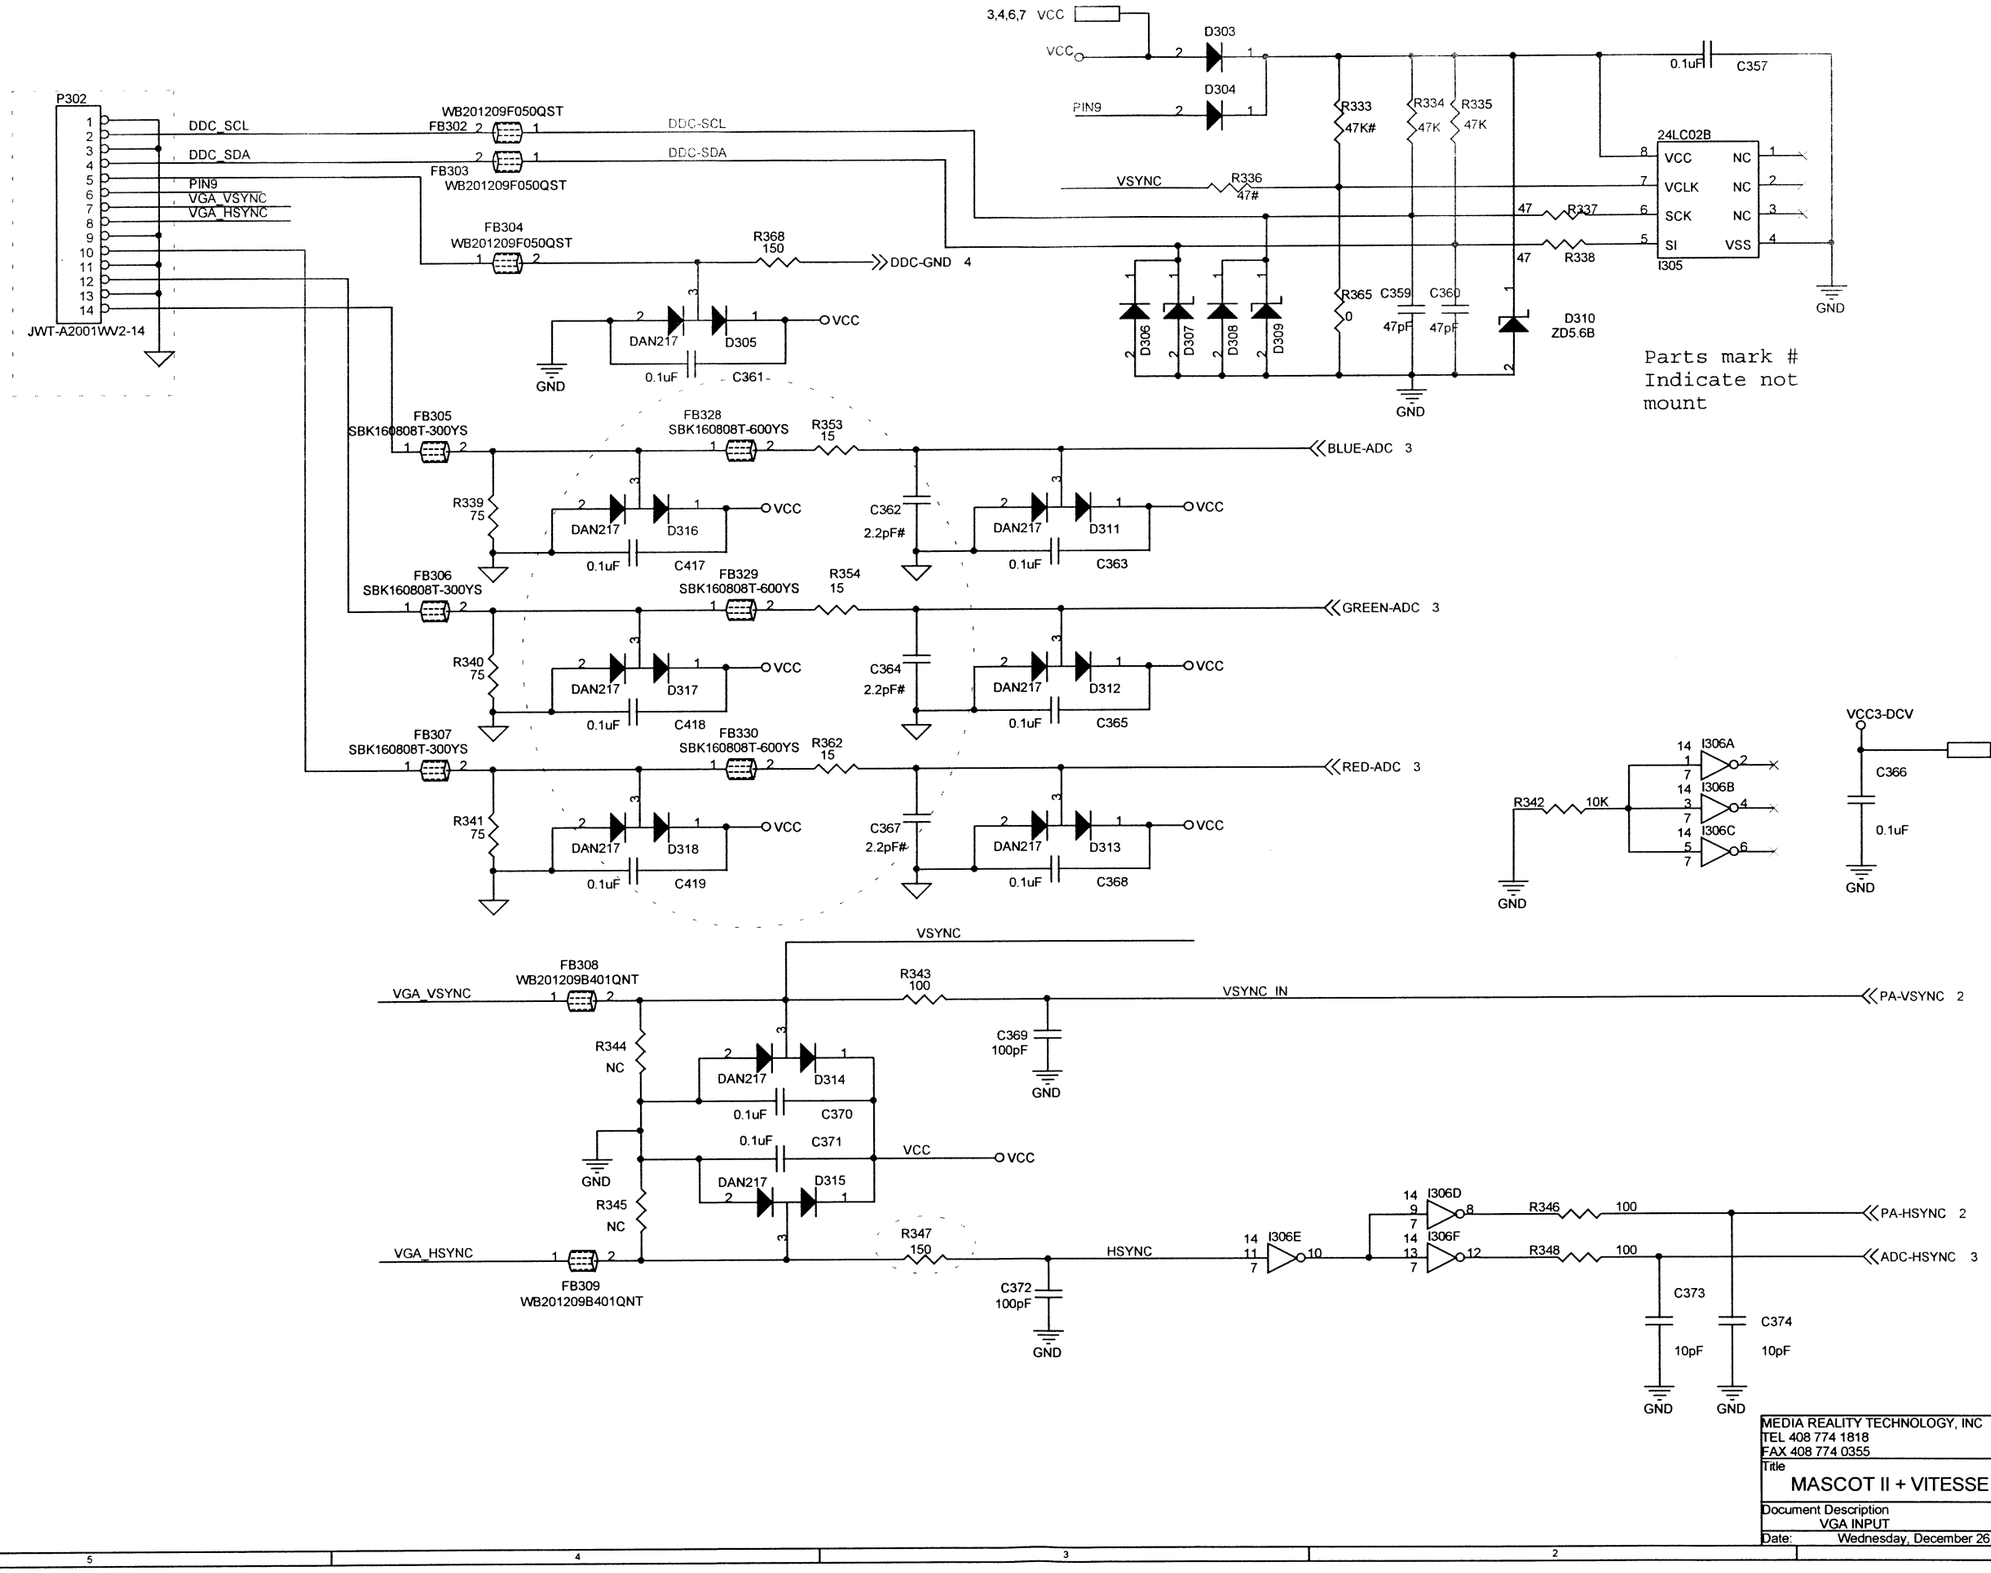
P302
DDC_SCL
DDC_SDA
PIN9
VGA_VSYNC
VGA_HSYNC
JWT-A2001WV2-14
WB201209F050QST
FB302
FB303
FB304
DDC-SCL
DDC-SDA
DDC-GND 4
R368 150
3,4,6,7 VCC
D303
D304
PIN9
R333 47K#
R334 47K
R335 47K
VSYNC
R336 47#
R337 47
R338 47
0.1uF C357
24LC02B
VCC
VCLK
SCK
SI
NC
VSS
I305
GND
D306
D307
D308
D309
R365 0
C359 47pF
C360 47pF
D310 ZD5.6B
DAN217
D305
0.1uF C361
FB305 SBK160808T-300YS
FB328 SBK160808T-600YS
R353 15
BLUE-ADC 3
R339 75
D316
C417
C362 2.2pF#
D311
C363
FB306 SBK160808T-300YS
FB329 SBK160808T-600YS
R354 15
GREEN-ADC 3
R340 75
D317
C418
C364 2.2pF#
D312
C365
FB307 SBK160808T-300YS
FB330 SBK160808T-600YS
R362 15
RED-ADC 3
R341 75
D318
C419
C367 2.2pF#
D313
C368
VCC
Parts mark # Indicate not mount
VCC3-DCV
VCC3-DCV 2,3,4,7
C366
0.1uF
R342 10K
I306A
I306B
I306C
FB308 WB201209B401QNT
FB309 WB201209B401QNT
VGA_VSYNC
VGA_HSYNC
VSYNC
VSYNC_IN
PA-VSYNC 2
R343 100
C369 100pF
R344 NC
R345 NC
D314
D315
C370
C371
R347 150
C372 100pF
HSYNC
I306D
I306E
I306F
R346 100
R348 100
PA-HSYNC 2
ADC-HSYNC 3
C373 10pF
C374 10pF
Parts mark # Indicate not mount
MEDIA REALITY TECHNOLOGY, INC
TEL 408 774 1818
FAX 408 774 0355
767 N. MARY AVE.
SUNNYVALE, CA 95086
Title
MASCOT II + VITESSE 2 (Beta 3)
Rev 02
Document Description
VGA INPUT
Date: Wednesday, December 26, 2001
Sheet 5 of 7

CPT INTERFACE

5V CPT 680mA
Inrush Current 8.94 A
Continuous 310 mA

2 RGB-A[0..23]

RP306 33X4
RGB-A16 8 1 RA0
RGB-A17 7 2 RA1
RGB-A18 6 3 RA2
RGB-A19 5 4 RA3
RGB-A20 8 1 RA4
RGB-A21 7 2 RA5
RGB-A22 6 3 RA6
RGB-A23 5 4 RA7
RP307 33X4

RP308 33X4
RGB-A8 8 1 GA0
RGB-A9 7 2 GA1
RGB-A10 6 3 GA2
RGB-A11 5 4 GA3
RGB-A12 8 1 GA4
RGB-A13 7 2 GA5
RGB-A14 6 3 GA6
RGB-A15 5 4 GA7
RP309 33X4

RP310 33X4
RGB-A0 8 1 BA0
RGB-A1 7 2 BA1
RGB-A2 6 3 BA2
RGB-A3 5 4 BA3
RGB-A4 8 1 BA4
RGB-A5 7 2 BA5
RGB-A6 6 3 BA6
RGB-A7 5 4 BA7
RP311 33X4

2 RGB-B[0..23]

RP312 33X4
RGB-B16 8 1 RB0
RGB-B17 7 2 RB1
RGB-B18 6 3 RB2
RGB-B19 5 4 RB3
RGB-B20 8 1 RB4
RGB-B21 7 2 RB5
RGB-B22 6 3 RB6
RGB-B23 5 4 RB7
RP313 33X4

RP314 33X4
RGB-B8 8 1 GB0
RGB-B9 7 2 GB1
RGB-B10 6 3 GB2
RGB-B11 5 4 GB3
RGB-B12 8 1 GB4
RGB-B13 7 2 GB5
RGB-B14 6 3 GB6
RGB-B15 5 4 GB7
RP315 33X4

RP316 33X4
RGB-B0 8 1 BB0
RGB-B1 7 2 BB1
RGB-B2 6 3 BB2
RGB-B3 5 4 BB3
RGB-B4 8 1 BB4
RGB-B5 7 2 BB5
RGB-B6 6 3 BB6
RGB-B7 5 4 BB7
RP317 33X4

3,4,5,7 VCC
VCC
7 V33
V33
FB310 N.C
FB311 WB201209B300QST
C375 0.1uF
C376 1000uF/10V
GND
C420 0.47uF
R349 4.7K
R371 1K
Q302 SI2305DS
R350 3.3K
2,4 VDDCRTL
Q303 SST3904
FB312 WB201209B300QST
FB313 WB201209B300QST
C377 0.1uF
C378 0.01uF
C379 0.1uF
GND

2 DISP-HSYNC
2 DISP-VSYNC
R351 33
R352 33
C413 N.C
C416 100pF
GND

2 SHCLK
SHCLK
FB314 FCM2012C-501T03
FB315 FCM2012C-501T03
D-SHCLK
C380 47pF
C381 5pF
GND

2 DE
DE
R355 33
D-DE
C382 100pF
GND

P303
PNLVCC
RA0 RA1 RA2 RA3 RA4 RA5 RA6 RA7
GA0 GA1 GA2 GA3 GA4 GA5 GA6 GA7
BA0 BA1 BA2 BA3 BA4 BA5 BA6 BA7
D-HSYNC
D-VSYNC
D-DE
D-SHCLK
XF2H-4515-1

P304
RB0 RB1 RB2 RB3 RB4 RB5 RB6 RB7
GB0 GB1 GB2 GB3 GB4 GB5 GB6 GB7
BB0 BB1 BB2 BB3 BB4 BB5 BB6 BB7
XF2H-3015-1

Parts mark # Indicate not mount

MEDIA REALITY TECHNOLOGY, INC TEL 408 774 1818 FAX 408 774 0355	767 N. MARY AVE. SUNNYVALE, CA 95086
Title: MASCOT II + VITESSE 2 (Beta 3)	Rev: 02
Document Description: OUTPUT CONNECTOR	
Date: Wednesday, December 26, 2001	Sheet 6 of 7

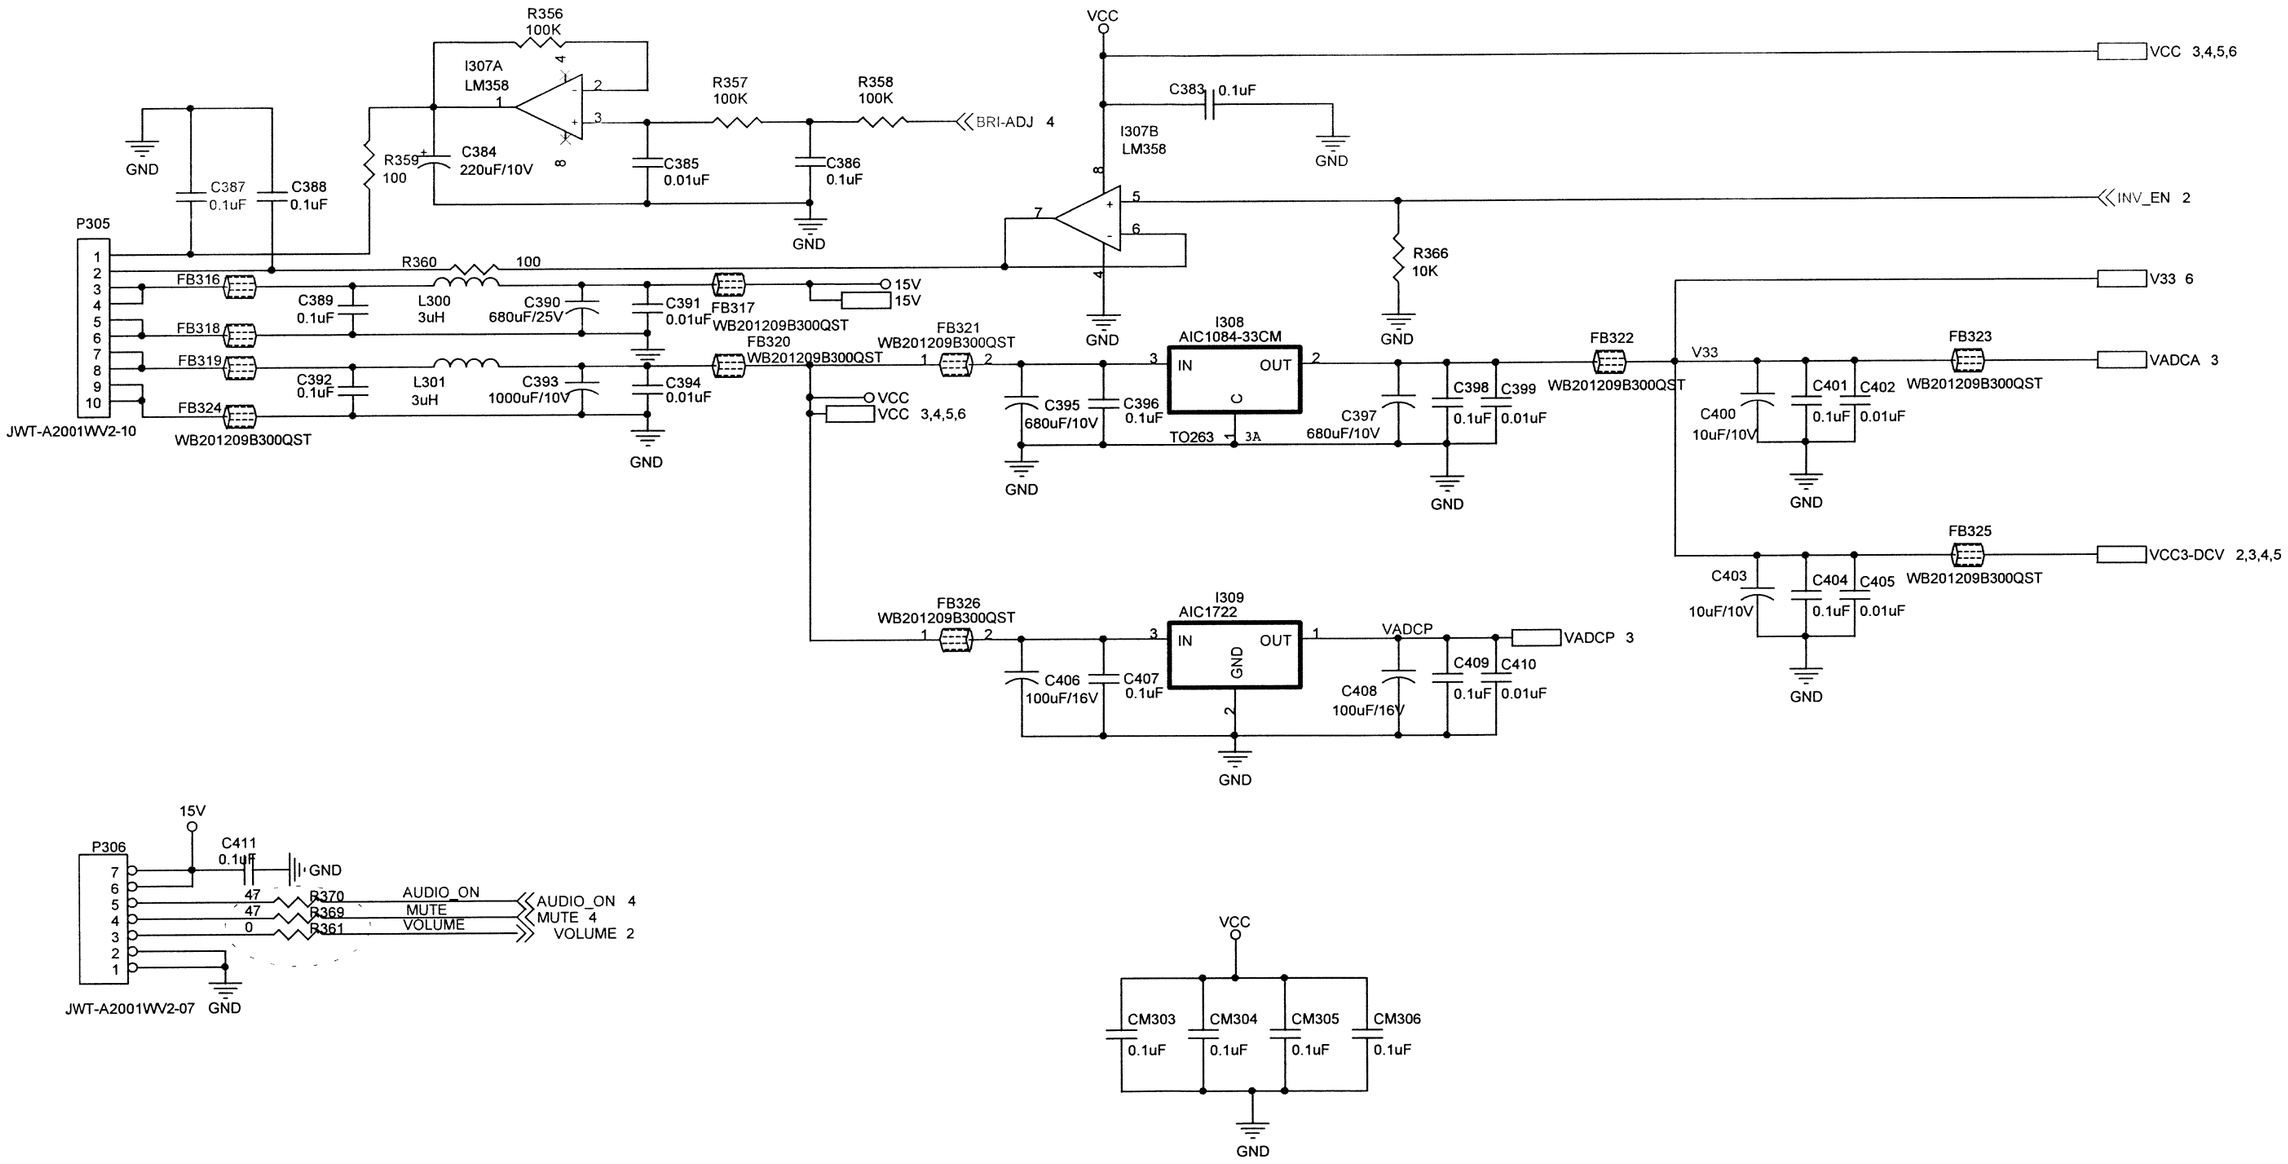

MEDIA REALITY TECHNOLOGY, INC TEL 408 774 1818 FAX 408 774 0355	767 N. MARY AVE. SUNNYVALE, CA 95086
Title: MASCOT II + VITESSE 2 (Beta 3)	Rev: 02
Document Description: POWER SUPPLY	
Date: Wednesday, December 26, 2001	Sheet 7 of 7

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
1	0		No	10	5112300018	BURN-IN ASS'Y-H15AAC-=-E-2-(C)-CARREFOUR		EA	1	NO	
2	A0001		No	10	9051300023-0A	SPEC.-ALIGN-H15AAC-CARREFOUR-		EA	1	NO	
2	A0002		No	10	9061300025-0A	SPEC.-INSP-H15AAC-CARREFOUR-		EA	1	NO	
2	A0003		No	10	9042400026-0A	SPEC.-ENGI-H15AAC-CARREFOUR-		EA	1	NO	
2	A0004		No	10	9082000091-0B	SPEC.-PROD-H15AAU-LITEON-		EA	1	NO	
2	A0005		No	10	9081000328-0D	EDID-H15AAC/U-LITEON-		EA	1	NO	900001728B
2	A0006		No	10	9084000020-0B	SPEC.-SAFETY-H15AAU-LITEON		EA	1	NO	
2	A0008		No	10	8812380000-01	DRAWING-INTERFACE BD CKT-H15AAC		EA	1	NO	900001582C
2	0		No	10	5113100019	LCD ASS'Y-H15AAC-=-E-2-(C)-CARREFOUR		EA	1	NO	
3	02U02		Yes	10	1241000200	LABEL-DATE CODE-----	8340000485	EA	1	NO	
3	06L01		Yes	10	7748706660-0A	BRACKET-LCD-H15AAC(9)-SECC-CLEAN	8140001356	EA	1	NO	
3	0SP00		Yes	10	6857103100	SPEAKER-M-3011C-JAZZ		EA	1	NO	
3	0V001		Yes	10	6715008231	CABLE-VIDEO--1800mm-BLACK-3+7 6.0D		EA	1	YES	
3	0V002		Yes	10	6712450170	HARNESS-FFC-45P(0.5)-200/31mm-2896(A TYPE)--		EA	1	NO	
3	0V003		Yes	10	6712300130	HARNESS-FFC-30P(0.5)-215/28mm-2896(A TYPE)--		EA	1	NO	
3	0V150		Yes	10	6814001502	LCD-15"-CLAA150XA03 (A000)-CPT		EA	1	YES	
3	6B01M		Yes	10	7150240122-0A	SCREW-BTYPE--Pan-M4-12-Ni	8440003303	EA	4	NO	
3	6B01N		Yes	10	7116240101-0A	SCREW-MACHINE-TOOTH WASHER-PAN HADE-M4-10-YELLOW Z	8440003305	EA	4	NO	
3	6B01O		Yes	10	7737704600-0A	BASE ASS'Y-LITEON-H15AAU(9)-MERCURY-#4590-ABS 94HB	8140001375	EA	1	YES	
3	6B02N		Yes	10	7737801350-0A	BRACKET-BRACKET STAND ASY-H15AAU(9)-SECC-CLEAN	8140001378	EA	1	NO	
3	6B02O		Yes	10	7140330081-0A	SCREW-DOUBLE THREAD-NO WASHER-FLAT HEAD-M3-8mm-YEL	8440003643	EA	6	NO	
3	6B02P		No	10	7738000320-0A	HINGE-HINGE-R-LITEON-H15AAU(9)-MERCURY15"--STAINIE	8340002849	EA	1	NO	
3	6B02Q		Yes	10	7115240081-0A	SCREW-MACHINE-Double Washer-Pan-M4-8-Zn	8440003241	EA	2	NO	
3	6B02R		No	10	7738000330-0A	HINGE-HINGE-L-LITEON-H15AAU(9)-MERCURY15"--STAINIE	8340002850	EA	1	NO	
3	6B02S		Yes	10	7115240081-0A	SCREW-MACHINE-Double Washer-Pan-M4-8-Zn	8440003241	EA	2	NO	
3	6B02T		Yes	10	7742607840-0A	COVER-FEET FRONT-LITEON-H15AAU(9)-MERCURY-#4590-AB	8140001352	EA	1	YES	
3	6B02U		Yes	10	7140130081	SCREW-DOUBLE THREAD--Round-M3-8-Zn	8440000090	EA	2	NO	
3	6B02V		Yes	10	7742607850-0A	COVER-FEET BACK-LITEON-H15AAU(9)-MERCURY-#4590-ABS	8140001353	EA	1	YES	
3	6B02W		Yes	10	7110430061	SCREW-MACHINE--Binding-M3-6-Zn	8440000018	EA	6	NO	
3	6F01P		Yes	10	7140130081	SCREW-DOUBLE THREAD--Round-M3-8-Zn	8440000090	EA	2	NO	
3	6F01Q		Yes	10	7140130081	SCREW-DOUBLE THREAD--Round-M3-8-Zn	8440000090	EA	8	NO	
3	6L01M		Yes	10	7746501120-0A	INSULATOR-BOTTOM-		EA	1	YES	
3	6L01N		Yes	10	7111230061	SCREW-MACHINE-Flat Washer-Pan-M3-6-Zn	8440001648	EA	2	NO	
3	6L01O		Yes	10	7111230061	SCREW-MACHINE-Flat Washer-Pan-M3-6-Zn	8440001648	EA	3	NO	
3	6L01P		Yes	10	7156130061-0A	SCREW-B TYPE-TOOTH WASHER-POUND-M3-6-YELLOW ZINE	8440003302	EA	1	NO	

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
3	6L01Q		Yes	10	7111230061	SCREW-MACHINE-Flat Washer-Pan-M3-6-Zn	8440001648	EA	4	NO	
3	6L01S		Yes	10	7746203190-0A	SHIELD-CHASSIS--H15AAU(9)-SPTE	8140001358	EA	1	NO	
3	6L01T		Yes	10	7746501170-0A	INSULATOR-H15AAU(9)-PPE	8340002863	EA	1	YES	
3	6L01U		Yes	10	7150130041-0A	SCREW-----3X4(B TYPE)-		EA	11	NO	
3	6L01V		Yes	10	7110430081	SCREW-MACHINE--Binding-M3-8-Zn	8440000696	EA	4	NO	
3	6L01X		Yes	10	7740100100	CLAMP-CABLE-WIRING CABLE TIE-NYLON-NATURE-75-	8440000030	EA	4	NO	
3	6L01Y		Yes	10	7115230081-0A	SCREW-MACHINE-Double Washer-Pan-M3-8-Zn	8440003378	EA	1	NO	
3	6L01Z		Yes	10	7150330082-0A	SCREW-B TYPE-WITHOUT WASHER-FLAT HEAD-M3-8-NI	8440004063	EA	1	NO	
3	6L02M		Yes	10	6876000901	ALUMINIUM TAP-W20xL0030x30M-3M		EA	0,001	NO	900001353A
3	6L02N		Yes	10	6876004400	ALUMINIUM TAP-W30XL0060X30M-3M		EA	0,002	NO	900001353A
3	L0001		Yes	10	6881007901	CORE--A5FS-31X5X12-ADD TAPE 3M-KINGCORE-		EA	1	NO	
3	L0002		Yes	10	6881008300	CORE-A5FS 24.5X5X12-ADD TAPE 3M-KING CORE		EA	1	NO	
3	P001B		Yes	10	6711031050-03	HARNESS--3P-250mm-2547#28--CG1050-01ADD CORE		EA	1	NO	900001353A
3	P002A		Yes	10	6711040890-10	HARNESS--4P-250mm-1007#26--30/25		EA	1	NO	
3	P601A		No	10	6711090250-02	HARNESS--9P/8P-280mm-1571#28--CG250-00ADD CORE		EA	1	NO	900001353B
3	06F01		Yes	10	7737507251-0A	FRONT COVER ASS'Y-LITE-ON-H15AAC-MERCURY-#4590-ABS		EA	1	YES	
3	06B01		Yes	10	7737605400-0A	REAR COVER ASS'Y-LITEON-H15AAU-MERCURY-#4590-ABS U	8140001411	EA	1	YES	
2	0		No	10	5113200002	INVERTER BD-GC150AT(99)-#-E-1-(K)-LITEON		EA	1	NO	
3	0C101		Yes	10	6311322141	CAP. ALU-uF-220-25V-LL-105C-8x12-		EA	1	NO	
3	9N050		Yes	10	1250000144	WIRE-SOLDER-06m/m--		lb	0,00001	NO	900000720G
3	0		No	10	5213200002	SMT-INVERTER BD-GC150ATA(99)-#-E-1-(K)-LITEON		EA	1	NO	
4	02U01		No	10	1241000205	LABEL-ID DATE CODE-----		EA	1	NO	900000819B
4	0C102		YES	10	6374422582	CAP. MC-uF-2.2-16V-Z-Y5V-SMD 0805		EA	1	NO	
4	0C103		Yes	10	6374410502	CAP. MC-uF-1-16V-M-Y5V-SMD 0805		EA	1	NO	
4	0C104		YES	10	6373422406	CAP. MC-uF-0.22-25V-M-Y5V-SMD 0603		EA	1	NO	
4	0C105		YES	10	6373410406	CAP. MC-uF-0.1-25V-M-Y5V-SMD 0603		EA	1	NO	
4	0C106		YES	10	6371215206	CAP. MC-pF-1500-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C107		YES	10	6371410306	CAP. MC-uF-0.01-50V-M-Y5V-SMD 0603		EA	1	NO	
4	0C108		YES	10	6371410306	CAP. MC-uF-0.01-50V-M-Y5V-SMD 0603		EA	1	NO	
4	0C109		YES	10	6371410306	CAP. MC-uF-0.01-50V-M-Y5V-SMD 0603		EA	1	NO	
4	0C110		YES	10	6373422406	CAP. MC-uF-0.22-25V-M-Y5V-SMD 0603		EA	1	NO	
4	0C111		YES	10	6373422406	CAP. MC-uF-0.22-25V-M-Y5V-SMD 0603		EA	1	NO	
4	0C113		YES	10	6373247306	CAP. MC-uF-0.047-25V-M-X7R-SMD 0603		EA	1	NO	
4	0C114		YES	10	6373410406	CAP. MC-uF-0.1-25V-M-Y5V-SMD 0603		EA	1	NO	
4	0C115		YES	10	6374122156	CAP. MC-pF-220-16V-J-NPO-SMD 0603		EA	1	NO	

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
4	0C116		YES	10	6371410306	CAP. MC-uF-0.01-50V-M-Y5V-SMD 0603		EA	1	NO	
4	0C117		YES	10	6373247306	CAP. MC-uF-0.047-25V-M-X7R-SMD 0603		EA	1	NO	
4	0C118		YES	10	6373410406	CAP. MC-uF-0.1-25V-M-Y5V-SMD 0603		EA	1	NO	
4	0C119		YES	10	6371218312	CAP. MC-uF-0.018-50V-K-X7R-SMD 0805		EA	1	NO	
4	0C121		Yes	10	6370112059-02	CAP. MC-pF-12-3KV-J-NPO-SMD-1808-HEC		EA	1	NO	900000814A
4	0C121	51	YES	10	6370112059	CAP. MC-pF-12-3KV-J-NPO-SMD 1808		EA	1	NO	900000814A
4	0C122		YES	10	6371218312	CAP. MC-uF-0.018-50V-K-X7R-SMD 0805		EA	1	NO	
4	0C123		Yes	10	6375410683-01	CAP. MC-uF-10-10V-Z-Y5V-SMD-1206-COMPOSTAR		EA	1	NO	900001005C
4	0C123	51	YES	10	6375410683	CAP. MC-uF-10-10V-Z-Y5V-SMD-1206-		EA	1	NO	900001005C
4	0C124		Yes	10	6370112059-02	CAP. MC-pF-12-3KV-J-NPO-SMD-1808-HEC		EA	1	NO	900000814A
4	0C124	51	YES	10	6370112059	CAP. MC-pF-12-3KV-J-NPO-SMD 1808		EA	1	NO	900000814A
4	0C125		Yes	10	6375410683-01	CAP. MC-uF-10-10V-Z-Y5V-SMD-1206-COMPOSTAR		EA	1	NO	900001005C
4	0C125	51	YES	10	6375410683	CAP. MC-uF-10-10V-Z-Y5V-SMD-1206-		EA	1	NO	900001005C
4	0C126		Yes	10	6371222212	CAP. MC-pF-2200-50V-K-X7R-SMD 0805		EA	1	NO	
4	0C127		Yes	10	6371222212	CAP. MC-pF-2200-50V-K-X7R-SMD 0805		EA	1	NO	
4	0D101		YES	10	6414056098	DIODE-ZNR-RLZ TE-11-5.6C-LL-34--		EA	1	NO	
4	0D102		YES	10	6413040038	DIODE-SCHOTTKY-RB751V-40-ROHM---		EA	1	NO	
4	0D103		YES	10	6413040038	DIODE-SCHOTTKY-RB751V-40-ROHM---		EA	1	NO	
4	0D104		YES	10	6414075018	DIODE-ZNR-RLZ TE-11 7.5B LL-34----		EA	1	NO	
4	0D105		Yes	10	6412001738	DIODE--RLS4148 LL-34 SMD----ROHM		EA	1	NO	
4	0D106		Yes	10	6412001738	DIODE--RLS4148 LL-34 SMD----ROHM		EA	1	NO	
4	0D107		YES	10	6413040038	DIODE-SCHOTTKY-RB751V-40-ROHM---		EA	1	NO	
4	0D108		Yes	10	6412001738	DIODE--RLS4148 LL-34 SMD----ROHM		EA	1	NO	
4	0D109		Yes	10	6412001738	DIODE--RLS4148 LL-34 SMD----ROHM		EA	1	NO	
4	0D110		Yes	10	6412001738	DIODE--RLS4148 LL-34 SMD----ROHM		EA	1	NO	
4	0F101		Yes	10	6851002000	FUSE-TIME LAG-2A--TR1/6125TD-BUSS		EA	1	YES	
4	0I101		Yes	10	6442033118	IC-SI4532DY-8PIN-SMD-FAIRCHILD-		EA	1	NO	
4	0I101	52	Yes	10	6442033128	IC-LINEAR-IRF7309-8PIN-SOP-I.R		EA	1	NO	900000526A
4	0I101	51	YES	10	6442033108	IC-Si4532ADY-T1-8P-SMD-VISHAY-		EA	1	NO	900000526A
4	0I102		Yes	10	6442032808	IC-OZ960S-20P-SSOP-O2-		EA	1	NO	
4	0I103		Yes	10	6442033118	IC-SI4532DY-8PIN-SMD-FAIRCHILD-		EA	1	NO	900000526A
4	0I103	52	Yes	10	6442033128	IC-LINEAR-IRF7309-8PIN-SOP-I.R		EA	1	NO	900000526A
4	0I103	51	YES	10	6442033108	IC-Si4532ADY-T1-8P-SMD-VISHAY-		EA	1	NO	900000526A
4	0Q101		No	10	6422007328	TRANSISTOR-NPN-MMBT3904LT1-SOT-23-LRC-		EA	1	NO	900001599D
4	0Q101	51	Yes	10	6422007308	TRANSISTOR-NPN-SST3904T116-T116(SST3)-ROHM-		EA	1	NO	900001599D

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
4	0Q102		No	10	6426010718	FET-N-CHNL-2N7002LT1-SOT-23-LRC		EA	1	NO	900001599D
4	0Q102	51	YES	10	6426010708	FET-N-CHNL-2N7002-SOT-23-FRCHL		EA	1	NO	900001599D
4	0Q103		No	10	6426010718	FET-N-CHNL-2N7002LT1-SOT-23-LRC		EA	1	NO	900001599D
4	0Q103	51	YES	10	6426010708	FET-N-CHNL-2N7002-SOT-23-FRCHL		EA	1	NO	900001599D

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
4	0Q104		No	10	6426010718	FET-N-CHNL-2N7002LT1-SOT-23-LRC		EA	1	NO	900001599D
4	0Q104	51	YES	10	6426010708	FET-N-CHNL-2N7002-SOT-23-FRCHL		EA	1	NO	900001599D
4	0Q105		No	10	6426010718	FET-N-CHNL-2N7002LT1-SOT-23-LRC		EA	1	NO	900001599D
4	0Q105	51	YES	10	6426010708	FET-N-CHNL-2N7002-SOT-23-FRCHL		EA	1	NO	900001599D
4	0Q106		No	10	6423000728	TRANSISTOR-PNP-MMBT3906LT1-SOT-23-LRC		EA	1	NO	900001599D
4	0Q106	51	Yes	10	6423000708	TRANSISTOR-PNP-SST3906-T116--		EA	1	NO	900001599D
4	0R101		YES	10	6252100156	RES. CHIP-R-KOHM-1-1/10W-J-603		EA	1	NO	
4	0R102		Yes	10	6252220956	RES. CHIP-R-OHM-22-1/10W-J-0603		EA	1	NO	
4	0R103		Yes	10	6252220956	RES. CHIP-R-OHM-22-1/10W-J-0603		EA	1	NO	
4	0R104		YES	10	6252130356	RES. CHIP-R-KOHM-130-1/10W-J-0603		EA	1	NO	
4	0R105		YES	10	6252270356	RES. CHIP-R-KOHM-270-1/10W-J-0603		EA	1	NO	
4	0R106		YES	10	6252110356	RES. CHIP-R-KOHM-110-1/10W-J-0603		EA	1	NO	900001572A
4	0R107		Yes	10	6252100356	RES. CHIP-R-KOHM-100-1/10W-J-0603		EA	1	NO	
4	0R108		YES	10	6252649246	RES. CHIP-R-KOHM-64.9-1/10W-F-0603		EA	1	NO	
4	0R109		No	10	6252118346	RES. CHIP-R-KOHM-118-1/10W-F-0603		EA	1	NO	900001572A
4	0R110		YES	10	6252100456	RES. CHIP-R-MOHM-1-1/10W-J-603		EA	1	NO	
4	0R111		YES	10	6252510356	RES. CHIP-R-KOHM-510-1/10W-J-0603		EA	1	NO	
4	0R112		YES	10	6252180256	RES. CHIP-R-KOHM-18-1/10W-J-0603		EA	1	NO	
4	0R113		Yes	10	6252510256	RES. CHIP-R-KOHM-51-1/10W-J-0603		EA	1	NO	
4	0R114		YES	10	6252100456	RES. CHIP-R-MOHM-1-1/10W-J-603		EA	1	NO	
4	0R115		YES	10	6252100456	RES. CHIP-R-MOHM-1-1/10W-J-603		EA	1	NO	
4	0R116		Yes	10	6252510256	RES. CHIP-R-KOHM-51-1/10W-J-0603		EA	1	NO	
4	0R117		Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-0603		EA	1	NO	
4	0R118		Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-0603		EA	1	NO	
4	0R119		Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-0603		EA	1	NO	
4	0R120		YES	10	6252680046	RES. CHIP-R-OHM-680-1/10W-F-0603		EA	1	NO	
4	0R121		YES	10	6252412046	RES. CHIP-R-OHM-412-1/10W-F-0603		EA	1	NO	
4	0R122		YES	10	6252680046	RES. CHIP-R-OHM-680-1/10W-F-0603		EA	1	NO	
4	0R123		YES	10	6252412046	RES. CHIP-R-OHM-412-1/10W-F-0603		EA	1	NO	
4	0R126		Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-0603		EA	1	NO	
4	0R127		YES	10	6252100156	RES. CHIP-R-KOHM-1-1/10W-J-603		EA	1	NO	

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
4	0T101		Yes	10	6132000300	XFRMER-POWER-F-0003-UI1S(3C90)-YAO SHENG		EA	1	NO	900000958A
4	0T101	51	Yes	10	6132000200	XFRMER--T-0002-XTREME-SMD		EA	1	YES	900000958A
4	0T102		Yes	10	6132000300	XFRMER-POWER-F-0003-UI1S(3C90)-YAO SHENG		EA	1	NO	900000958A
4	0T102	51	Yes	10	6132000200	XFRMER--T-0002-XTREME-SMD		EA	1	YES	900000958A
4	9N030		Yes	10	1250000110	OIL HOUSE-SOLDER PASTE--		EA	0,001	NO	900000939L
4	CN101		YES	10	6613060030	PLUG-06P-2.0mm-JST\S6B-PH-SM3-TB-		EA	1	NO	900000292A
4	CN101	51	Yes	10	6613060050	PLUG-6P-2.0mm-88291-0600-ACES		EA	1	NO	900000292A
4	CN102		Yes	10	6610020010	CONNECTOR----SM02(8.0)B-BHS-1-TB-JST-		EA	1	NO	
4	CN103		Yes	10	6610020010	CONNECTOR----SM02(8.0)B-BHS-1-TB-JST-		EA	1	NO	
4	CR101		No	10	6412024218	DIODE-BAV99LT1-SOT-23-LRC----		EA	1	NO	900001599D
4	CR101	51	Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROHM		EA	1	NO	900001599D
4	CR102		No	10	6412024218	DIODE-BAV99LT1-SOT-23-LRC----		EA	1	NO	900001599D
4	CR102	51	Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROHM		EA	1	NO	900001599D
4	CR103		Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROHM		EA	1	NO	900001599D
4	CR104		Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROHM		EA	1	NO	900001599D
4	U1217		Yes	10	6832121700-02	PCB-INVERTER BD-PTB-1217		EA	1	YES	
2	0		No	10	5113300027	INTERFACE BD-H15AAC-=-E-2-(C)-CARREFOUR		EA	1	NO	
3	02U01		No	10	1241000205	LABEL-ID DATE CODE-----		EA	1	NO	
3	0C003		Yes	10	6311347142	CAP. ALU-uF-470-25V-F-105C-10x16-		EA	1	NO	900001277A
3	0C010		Yes	10	6311310142	CAP. ALU-uF-100-25V-F-105C-6.3x11-		EA	1	NO	900001277A
3	0C040		Yes	10	6311547979	CAP. ALU-uF-4.7-50V-F-105C-6.3X7MAX-P=3.7		EA	1	NO	
3	0C041		Yes	10	6311547979	CAP. ALU-uF-4.7-50V-F-105C-6.3X7MAX-P=3.7		EA	1	NO	
3	0C042		Yes	10	6311347142	CAP. ALU-uF-470-25V-F-105C-10x16-		EA	1	NO	900001277A
3	0C043		Yes	10	6311347142	CAP. ALU-uF-470-25V-F-105C-10x16-		EA	1	NO	900001277A
3	0C331		Yes	10	6311210169	CAP. ALU-uF-100-16V-F-105C-6X7-P=5 LEAD=3.7+-0.2		EA	1	NO	
3	0C342		Yes	10	6311122149	CAP. ALU-uF-220-10V-NF-105C-8X7-LEAD 3.7		EA	1	NO	
3	0C376		Yes	10	6311110299	CAP. ALU-uF-1000-10V-F-105-10X9-KW SERIES		EA	1	NO	
3	0C384		Yes	10	6311122149	CAP. ALU-uF-220-10V-NF-105C-8X7-LEAD 3.7		EA	1	NO	
3	0C390		Yes	10	6311368149	CAP. ALU-uF-680-25V-NF-105C-10X13MAX-LEAD3.7mm		EA	1	NO	
3	0C393		Yes	10	6311110299	CAP. ALU-uF-1000-10V-F-105-10X9-KW SERIES		EA	1	NO	
3	0C395		Yes	10	6310168148	ALUMINATOR-uF-680-10V--105C-10x11max-high ripple		EA	1	NO	
3	0C397		Yes	10	6310168148	ALUMINATOR-uF-680-10V--105C-10x11max-high ripple		EA	1	NO	
3	0C406		Yes	10	6311210169	CAP. ALU-uF-100-16V-F-105C-6X7-P=5 LEAD=3.7+-0.2		EA	1	NO	
3	0C408		Yes	10	6311210169	CAP. ALU-uF-100-16V-F-105C-6X7-P=5 LEAD=3.7+-0.2		EA	1	NO	
3	0D300		Yes	10	6442001345	IC-LINEAR-KA431AZTA-3PIN-TO-92-FAIRCHILD		EA	1	NO	

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
3	0I001		Yes	10	6442023100	IC-Linear-TDA7496L-20P-PDIP-SGS		EA	1	NO	
3	0I303		Yes	10	6448018900	IC-CPU-SM89516C25J-44PIN-PLCC-SYNCMOS		EA	1	NO	
3	0L001		Yes	10	6111456131	COIL CHOKE--uH-45-K-DRWW10x10LI1-		EA	1	NO	
3	0L300		Yes	10	6111307130	COIL CHOKE--uH-3-K-DRWW6x8G3-		EA	1	NO	
3	0L301		Yes	10	6111307130	COIL CHOKE--uH-3-K-DRWW6x8G3-		EA	1	NO	
3	0P001		Yes	10	6613030030	PLUG-3P-2.0mm-A2001WR2-03-JWT		EA	1	NO	
3	0P002		Yes	10	6613040020	PLUG-4P-2.0mm-A2001WR2-04-JWT		EA	1	NO	
3	0P301		Yes	10	6613090010	PLUG-09P-2.0mm-JWT-A2001WV2-09-		EA	1	NO	
3	0P302		Yes	10	6613140020	PLUG-14P-2.0mm-A200/WV2-14P-JWT		EA	1	NO	
3	0P305		Yes	10	6613100020	PLUG-10P-2.0mm-A2001WV2-10-JWT		EA	1	NO	
3	0X300		Yes	10	6449003410	CRYSTAL-12.000MHZ-HC-49/US-KDS-		EA	1	NO	
3	0X301		Yes	10	6449003410	CRYSTAL-12.000MHZ-HC-49/US-KDS-		EA	1	NO	
3	9N005		Yes	10	1250000144	WIRE-SOLDER-06m/m--		lb	0,001	NO	
3	9N015		No	10	1250000221	FLUX-RF800T3-LONCO		GL	0,00034	NO	
3	9N020		No	10	1250000321	OIL HOUSE-THINNER LONCO RF800ADD--		GL	0,006	NO	
3	9N025		Yes	10	1250000130	WIRE-SOLDER-ADEPO S60A--		kg	0,001	NO	
3	9N050		Yes	10	1250000100	OIL HOUSE-SOLDER BAR ADEPTO S63A--		l	0,002	NO	
3	I001M		Yes	10	7746402571-0A	HEAT SINK--GC150ATA-AL-CLEAN	8440003873	EA	1	NO	900001673A
3	I302A		No	10	9083001501-01	F/W-H15AAC-VER:M301-CAREFOUR/ACER/LITEON		EA	1	NO	
3	0		No	10	5213300027	SMT-INTERFACE BD-H15AAC-=-E-2-(C)-CARREFOUR		EA	1	NO	
4	0C002		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C004		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C007		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C008		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C015		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C044		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C300		No	10	6371115056	CAP. MC-pF-15-50V-J-NPO-SMD-0603-		EA	1	NO	
4	0C301		No	10	6371115056	CAP. MC-pF-15-50V-J-NPO-SMD-0603-		EA	1	NO	
4	0C302		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C303		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C304		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C305		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C306		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C307		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C308		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
4	0C309		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C310		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C311		Yes	10	6371215106	CAP. MC-pF-150-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C312		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C313		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C314		YES	10	6375410683	CAP. MC-uF-10-10V-Z-Y5V-SMD-1206-		EA	1	NO	
4	0C315		Yes	10	6373239316	CAP. MC-uF-0.039-25V-K-X7R-SMD-0603		EA	1	NO	
4	0C318		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C319		Yes	10	6373247216	CAP. MC-uF-0.0047-25V-K-X7R-SMD-0603		EA	1	NO	
4	0C320		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C321		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C322		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C323		Yes	10	6373247216	CAP. MC-uF-0.0047-25V-K-X7R-SMD-0603		EA	1	NO	
4	0C324		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C325		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C326		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
4	0C327		Yes	10	6373247216	CAP. MC-uF-0.0047-25V-K-X7R-SMD-0603		EA	1	NO	
4	0C328		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C329		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C330		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C332		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C333		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C334		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C335		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C336		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C337		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C338		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C339		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C340		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C341		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C343		No	10	6371115056	CAP. MC-pF-15-50V-J-NPO-SMD-0603-		EA	1	NO	
4	0C344		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C345		No	10	6371115056	CAP. MC-pF-15-50V-J-NPO-SMD-0603-		EA	1	NO	
4	0C346		YES	10	6373247316	CAP. MC-uF-0.047-25V-K-X7R-SMD-0603		EA	1	NO	
4	0C347		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
4	0C348		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C349		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C350		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C351		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C352		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C353		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C354		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C355		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C356		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C357		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C359		Yes	10	6371147056	CAP. MC-pF-47-50V-J-NPO-SMD 0603		EA	1	NO	
4	0C360		Yes	10	6371147056	CAP. MC-pF-47-50V-J-NPO-SMD 0603		EA	1	NO	
4	0C361		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C363		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C365		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C366		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C368		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C369		Yes	10	6371110156	CAP. MC-pF-100-50V-J-NPO-SMD 0603		EA	1	NO	
4	0C370		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C371		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C372		Yes	10	6371110156	CAP. MC-pF-100-50V-J-NPO-SMD 0603		EA	1	NO	
4	0C373		Yes	10	6371110056	CAP. MC-pF-10-50V-J-NPO-SMD		EA	1	NO	900001673B
4	0C374		Yes	10	6371110056	CAP. MC-pF-10-50V-J-NPO-SMD		EA	1	NO	900001673B
4	0C375		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C377		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C378		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C379		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C380		Yes	10	6371147056	CAP. MC-pF-47-50V-J-NPO-SMD 0603		EA	1	NO	
4	0C381		Yes	10	6371150956	CAP. MC-pF-5-50V-J-NPO-SMD 0603		EA	1	NO	
4	0C382		Yes	10	6371110156	CAP. MC-pF-100-50V-J-NPO-SMD 0603		EA	1	NO	
4	0C383		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C385		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C386		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C387		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C388		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
4	0C389		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C391		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C392		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C394		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C396		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C398		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C399		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C400		YES	10	6375410683	CAP. MC-uF-10-10V-Z-Y5V-SMD-1206-		EA	1	NO	
4	0C401		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C402		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C403		YES	10	6375410683	CAP. MC-uF-10-10V-Z-Y5V-SMD-1206-		EA	1	NO	
4	0C404		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C405		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C407		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C409		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C410		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C411		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C412		Yes	10	6311210043	ALUMINATOR-uF-10-16V-T-105C--SMD		EA	1	NO	
4	0C414		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C415		Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD 0603		EA	1	NO	
4	0C416		Yes	10	6371110156	CAP. MC-pF-100-50V-J-NPO-SMD 0603		EA	1	NO	
4	0C417		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C418		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C419		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	0C420		No	10	6374447486-01	CAP. MC-uF-0.47-16V-Z-Y5V-SMD-0603-COMPOSTAR		EA	1	NO	
4	0D002		Yes	10	6412025108	DIODE-SWITCHING-S1A-1A/50V-SMD--LITEON-		EA	1	NO	
4	0D003		Yes	10	6412025108	DIODE-SWITCHING-S1A-1A/50V-SMD--LITEON-		EA	1	NO	
4	0D303		YES	10	6412001778	DIODE-SWITCHING-MM4148-0.15A/75V-MINI MELF-4nS-GRA		EA	1	NO	
4	0D304		YES	10	6412001778	DIODE-SWITCHING-MM4148-0.15A/75V-MINI MELF-4nS-GRA		EA	1	NO	
4	0D305		Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROHM		EA	1	NO	
4	0D306		YES	10	6412001778	DIODE-SWITCHING-MM4148-0.15A/75V-MINI MELF-4nS-GRA		EA	1	NO	
4	0D307		Yes	10	6414056038	DIODE-ZNR-RLZ TE-11 5.6B LL-34----		EA	1	NO	
4	0D308		YES	10	6412001778	DIODE-SWITCHING-MM4148-0.15A/75V-MINI MELF-4nS-GRA		EA	1	NO	
4	0D309		Yes	10	6414056038	DIODE-ZNR-RLZ TE-11 5.6B LL-34----		EA	1	NO	
4	0D310		Yes	10	6414056038	DIODE-ZNR-RLZ TE-11 5.6B LL-34----		EA	1	NO	

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
4	0D311		Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROHM		EA	1	NO	
4	0D312		Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROHM		EA	1	NO	
4	0D313		Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROHM		EA	1	NO	
4	0D314		Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROHM		EA	1	NO	
4	0D315		Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROHM		EA	1	NO	
4	0D316		Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROHM		EA	1	NO	
4	0D317		Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROHM		EA	1	NO	
4	0D318		Yes	10	6412019508	DIODE--DAN217 SMD3 T146----ROHM		EA	1	NO	
4	0I300		No	10	6447000416	IC-ASIC-MASCOT II REV2 CONTROLLER-160P-PQFP-MRT		EA	1	NO	900001673B
4	0I301		Yes	10	6447000506	IC-ASIC-VITESSE2-100P-QFP-MRT		EA	1	NO	
4	0I302		Yes	10	6444006108	IC-MOS-M51953AFP-8P-SOP-		EA	1	NO	
4	0I304		YES	10	6448016508	IC-EEPROM-24LC16B/SN-8P-SOP		EA	1	NO	
4	0I305		Yes	10	6448018208	IC-24LC02B-8PIN-SOP-MICROCHIP		EA	1	NO	
4	0I306		Yes	10	6446006218	IC-TTL-74LVC14-14P-TSSOP-TI		EA	1	NO	
4	0I307		Yes	10	6442001978	IC-Linear-LM358DR-8P-SOP-TI		EA	1	NO	
4	0I308		Yes	10	6442023326	IC-Linear-AIC1084-33CM-3P-TO263 SMD-		EA	1	NO	
4	0I309		Yes	10	6442018028	IC-LINEAR-AIC1722-33CX-3.3V-SOT-89SMD		EA	1	NO	
4	0I310		YES	10	6446008108	IC-TTL-NC7SZ04M5X-5P--FAIRCHILD		EA	1	NO	
4	0P303		Yes	10	6640450030	CONNECTOR-FFC-45P-0.5mm-GF056-45S-LSS-E2000-LG		EA	1	NO	900001256A
4	0P303	51	Yes	10	6640045400	CONNECTOR-FPC-45P-0.5mm-XF2H-4515-1-OMRON-		EA	1	NO	900001256A
4	0P304		Yes	10	6640300040	CONNECTOR-FFC-30P-0.5mm-GF056-30S-LSS-E2000-LG		EA	1	NO	900001256A
4	0P304	51	Yes	10	6640030400	CONNECTOR-FPC-30P-0.5mm-XF2H-3015-1-OMRON-		EA	1	NO	900001256A
4	0Q300		YES	10	6422007208	TRANSISTOR-NPN-SST2222AT116-T116(SST3)-ROHM-		EA	1	NO	
4	0Q301		YES	10	6422007208	TRANSISTOR-NPN-SST2222AT116-T116(SST3)-ROHM-		EA	1	NO	
4	0Q302		Yes	10	6427002508	FET-P-CHNL-SI2305DS-T1-VISHAY		EA	1	NO	
4	0Q303		Yes	10	6422007308	TRANSISTOR-NPN-SST3904T116-T116(SST3)-ROHM-		EA	1	NO	
4	0R001		Yes	10	6252000056	RES. CHIP-R-OHM-0-1/10W-J-0603		EA	1	NO	
4	0R003		Yes	10	6252180346	RES. CHIP-R-KOHM-180-1/10W-F-SMD		EA	1	NO	

	4	0R004		Yes	10	6252300356	RES. CHIP-R-KOHM-300-1/10W-J-SMD-0603			EA	1	NO	
	4	0R040		Yes	10	6252100146	RES. CHIP-R-KOHM-1-1/10W-F-603			EA	1	NO	
	4	0R041		Yes	10	6252100146	RES. CHIP-R-KOHM-1-1/10W-F-603			EA	1	NO	
	4	0R042		Yes	10	6252470246	RES. CHIP-R-KOHM-47-1/10W-F-SMD-0603			EA	1	NO	
	4	0R043		Yes	10	6252470246	RES. CHIP-R-KOHM-47-1/10W-F-SMD-0603			EA	1	NO	
	4	0R045		Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-0603			EA	1	NO	
	4	0R046		Yes	10	6252000056	RES. CHIP-R-OHM-0-1/10W-J-0603			EA	1	NO	

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
4	0R303		Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-0603		EA	1	NO	
4	0R304		Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-0603		EA	1	NO	
4	0R305		Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-0603		EA	1	NO	
4	0R306		Yes	10	6252510046	RES. CHIP-R-OHM-510-1/10W-F-0603		EA	1	NO	
4	0R307		YES	10	6252100456	RES. CHIP-R-MOHM-1-1/10W-J-603		EA	1	NO	
4	0R308		Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-0603		EA	1	NO	
4	0R309		Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-0603		EA	1	NO	
4	0R310		Yes	10	6252220156	RES. CHIP-R-KOHM-2.2-1/10W-J-0603		EA	1	NO	
4	0R311		Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-0603		EA	1	NO	
4	0R312		Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-0603		EA	1	NO	
4	0R313		YES	10	6252100456	RES. CHIP-R-MOHM-1-1/10W-J-603		EA	1	NO	
4	0R314		Yes	10	6252220156	RES. CHIP-R-KOHM-2.2-1/10W-J-0603		EA	1	NO	
4	0R315		Yes	10	6252220156	RES. CHIP-R-KOHM-2.2-1/10W-J-0603		EA	1	NO	
4	0R318		Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0603		EA	1	NO	
4	0R319		Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0603		EA	1	NO	
4	0R323		Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-0603		EA	1	NO	
4	0R324		Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-0603		EA	1	NO	
4	0R325		Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-0603		EA	1	NO	
4	0R326		Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-0603		EA	1	NO	
4	0R327		Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0603		EA	1	NO	
4	0R328		Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0603		EA	1	NO	
4	0R329		YES	10	6252680056	RES. CHIP-R-OHM-680-1/10W-J-603		EA	1	NO	
4	0R330		YES	10	6252100156	RES. CHIP-R-KOHM-1-1/10W-J-603		EA	1	NO	
4	0R331		YES	10	6252680056	RES. CHIP-R-OHM-680-1/10W-J-603		EA	1	NO	
4	0R332		YES	10	6252100156	RES. CHIP-R-KOHM-1-1/10W-J-603		EA	1	NO	
4	0R334		YES	10	6252470256	RES. CHIP-R-KOHM-47-1/10W-J-603		EA	1	NO	900001673B
4	0R335		YES	10	6252470256	RES. CHIP-R-KOHM-47-1/10W-J-603		EA	1	NO	900001673B
4	0R337		Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-0603		EA	1	NO	
4	0R338		Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-0603		EA	1	NO	
4	0R339		Yes	10	6252750956	RES. CHIP-R-OHM-75-1/10W-J-0603		EA	1	NO	
4	0R340		Yes	10	6252750956	RES. CHIP-R-OHM-75-1/10W-J-0603		EA	1	NO	
4	0R341		Yes	10	6252750956	RES. CHIP-R-OHM-75-1/10W-J-0603		EA	1	NO	
4	0R342		Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-0603		EA	1	NO	
4	0R343		Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-0603		EA	1	NO	900001673B
4	0R346		Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-0603		EA	1	NO	900001673B

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
4	0R347		Yes	10	6252150056	RES. CHIP-R-OHM-150-1/10W-J-0603		EA	1	NO	
4	0R348		Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-0603		EA	1	NO	900001673B
4	0R349		Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0603		EA	1	NO	
4	0R350		YES	10	6252330156	RES. CHIP-R-KOHM-3.3-1/10W-J-603		EA	1	NO	
4	0R351		Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-0603		EA	1	NO	
4	0R352		Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-0603		EA	1	NO	
4	0R353		Yes	10	6252015056	RES. CHIP-R-OHM-15-1/10W-J-SMD-0603		EA	1	NO	
4	0R354		Yes	10	6252015056	RES. CHIP-R-OHM-15-1/10W-J-SMD-0603		EA	1	NO	
4	0R355		Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-0603		EA	1	NO	
4	0R356		Yes	10	6252100356	RES. CHIP-R-KOHM-100-1/10W-J-0603		EA	1	NO	
4	0R357		Yes	10	6252100356	RES. CHIP-R-KOHM-100-1/10W-J-0603		EA	1	NO	
4	0R358		Yes	10	6252100356	RES. CHIP-R-KOHM-100-1/10W-J-0603		EA	1	NO	
4	0R359		Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-0603		EA	1	NO	900001673B
4	0R360		Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-0603		EA	1	NO	900001673B
4	0R361		Yes	10	6252000056	RES. CHIP-R-OHM-0-1/10W-J-0603		EA	1	NO	
4	0R362		Yes	10	6252015056	RES. CHIP-R-OHM-15-1/10W-J-SMD-0603		EA	1	NO	
4	0R363		YES	10	6252470256	RES. CHIP-R-KOHM-47-1/10W-J-603		EA	1	NO	900001673B
4	0R364		YES	10	6252470256	RES. CHIP-R-KOHM-47-1/10W-J-603		EA	1	NO	900001673B
4	0R365		Yes	10	6252000056	RES. CHIP-R-OHM-0-1/10W-J-0603		EA	1	NO	
4	0R366		Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-0603		EA	1	NO	
4	0R367		Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-0603		EA	1	NO	
4	0R368		Yes	10	6252150056	RES. CHIP-R-OHM-150-1/10W-J-0603		EA	1	NO	
4	0R369		Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-0603		EA	1	NO	
4	0R370		Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-0603		EA	1	NO	
4	0R371		YES	10	6252100156	RES. CHIP-R-KOHM-1-1/10W-J-603		EA	1	NO	
4	9N030		Yes	10	1250000110	OIL HOUSE-SOLDER PASTE--		EA	0,002	NO	
4	9N031		No	10	1320001001	OIL HOUSE-CLEANSER FOR SMT-CHUANG QI		GL	0,0028	NO	900001259G
4	CM301		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	CM302		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	CM303		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	CM304		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	CM305		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	CM306		YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0603		EA	1	NO	900001673B
4	FB301		Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN		EA	1	NO	
4	FB302		Yes	10	6881101108	CORE-BEAD-WB201209F050QST--WLSN		EA	1	NO	

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
4	FB303		Yes	10	6881101108	CORE-BEAD-WB201209F050QST--WLSN		EA	1	NO	
4	FB304		Yes	10	6881101108	CORE-BEAD-WB201209F050QST--WLSN		EA	1	NO	
4	FB305		Yes	10	6881601578	CORE-BEAD-SBK160808T-300Y-S--CH		EA	1	NO	
4	FB306		Yes	10	6881601578	CORE-BEAD-SBK160808T-300Y-S--CH		EA	1	NO	
4	FB307		Yes	10	6881601578	CORE-BEAD-SBK160808T-300Y-S--CH		EA	1	NO	
4	FB308		YES	10	6881101928	CORE-BEAD-WB201209B401QNT WLSN--		EA	1	NO	
4	FB309		YES	10	6881101928	CORE-BEAD-WB201209B401QNT WLSN--		EA	1	NO	
4	FB310		Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN		EA	1	NO	
4	FB312		Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN		EA	1	NO	
4	FB313		Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN		EA	1	NO	
4	FB314		Yes	10	6881102068	CORE-BEAD-FCM2012 C-501T03-SMD-NWE-		EA	1	NO	
4	FB315		Yes	10	6881102068	CORE-BEAD-FCM2012 C-501T03-SMD-NWE-		EA	1	NO	
4	FB316		Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN		EA	1	NO	
4	FB317		Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN		EA	1	NO	
4	FB318		Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN		EA	1	NO	
4	FB319		Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN		EA	1	NO	
4	FB320		Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN		EA	1	NO	
4	FB321		Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN		EA	1	NO	
4	FB322		Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN		EA	1	NO	
4	FB323		Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN		EA	1	NO	
4	FB324		Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN		EA	1	NO	
4	FB325		Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN		EA	1	NO	
4	FB326		Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN		EA	1	NO	
4	FB328		YES	10	6881601378	CORE-BEAD-SBK160808T-600Y-S--CH		EA	1	NO	
4	FB329		YES	10	6881601378	CORE-BEAD-SBK160808T-600Y-S--CH		EA	1	NO	
4	FB330		YES	10	6881601378	CORE-BEAD-SBK160808T-600Y-S--CH		EA	1	NO	
4	I303B		Yes	10	6626440020	SOCKET-IC-8111-44TAB2-44P-PLCC		EA	1	NO	
4	RP300		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP301		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP302		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP303		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP304		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP305		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP306		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP307		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
4	RP308		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP309		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP310		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP311		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP312		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP313		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP314		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP315		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP316		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP317		YES	10	6263302818	RES. FRN-OHM-33-1/16W-J		EA	1	NO	
4	RP318		Yes	10	6261032818	RES. FRN-KOHM-10-1/16W-J		EA	1	NO	
4	RP319		Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J		EA	1	NO	
4	RP320		Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J		EA	1	NO	
4	U1238		Yes	10	6832123800-02	PCB-INTERFACE BD-PTB-1238-REV.02		EA	1	YES	
2	0		No	10	5113800010	FUNCTION KEY BD-H15AAU(9)-=-E-1-(K)-NON-BRAND		EA	1	NO	
3	0D600		Yes	10	6418002200	LED-LTL-30EDJ---LITE-ON-		EA	1	NO	
3	0GND1		Yes	10	6714010551-31	HARNESS--1P-44mm-BD144+HSTUB--4.3/TIN6		EA	1	NO	
3	0P601		Yes	10	6613080020	PLUG-8P-2.0mm-A2001WR2-08-JWT		EA	1	NO	
3	0S601		YES	10	6853001100	SWITCH-TACT-SKHHAK2510-UE-BLK-5MM		EA	1	YES	900000957D
3	0S602		YES	10	6853001100	SWITCH-TACT-SKHHAK2510-UE-BLK-5MM		EA	1	YES	900000957D
3	0S603		YES	10	6853001100	SWITCH-TACT-SKHHAK2510-UE-BLK-5MM		EA	1	YES	900000957D
3	0S604		YES	10	6853001100	SWITCH-TACT-SKHHAK2510-UE-BLK-5MM		EA	1	YES	900000957D
3	0S605		YES	10	6853001100	SWITCH-TACT-SKHHAK2510-UE-BLK-5MM		EA	1	YES	900000957D
3	9N010		Yes	10	1250000130	WIRE-SOLDER-ADEPO S60A--		kg	0,00001	NO	900000792B
3	9N025		No	10	1250000221	FLUX-RF800T3-LONCO		GL	0,002	NO	900001007G
3	9N030		No	10	1250000321	OIL HOUSE-THINNER LONCO RF800ADD--		GL	0,0005	NO	900000792B
3	9N050		Yes	10	1250000100	OIL HOUSE-SOLDER BAR ADEPTO S63A--		l	0,002	NO	900000942F
3	9N066		No	10	1250200223	OIL HOUSE-PREVENTOR 500--		EA	0,00004	NO	900000792B
3	9N080		Yes	10	1240000423	TAPE--50Mx508mmx0055mm-PCK-		RL	0,000054	NO	900001122G
3	0		No	10	5713800010	AI-FUNCTION KEY BD-H15AAU(9)-=-E-1-(C)-LITEON		EA	1	NO	900001350A
4	0C601		Yes	30	6341410485	CAP. MC-uF-0.1-50V-Z-Y5V-T-RD21		EA	1	NO	
4	0C602		Yes	30	6341410485	CAP. MC-uF-0.1-50V-Z-Y5V-T-RD21		EA	1	NO	
4	0C603		Yes	30	6341410485	CAP. MC-uF-0.1-50V-Z-Y5V-T-RD21		EA	1	NO	
4	0C604		Yes	30	6341410485	CAP. MC-uF-0.1-50V-Z-Y5V-T-RD21		EA	1	NO	
4	0C605		Yes	30	6341410485	CAP. MC-uF-0.1-50V-Z-Y5V-T-RD21		EA	1	NO	

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
4	U1239		No	10	6832123900-01	PCB-FUNCTION KEY BD-PTB-1239-REV.01		EA	1	YES	
2	0		No	10	5114100024	CONTROL BD-AUDIO JACK BD-H15AAU(9)-=-E-1-(K)-NON-B		EA	1	NO	
3	02U01		Yes	10	1241000200	LABEL-DATE CODE-----	8340000485	EA	1	NO	900000792A
3	0P001		YES	10	6613030020	PLUG-03P-2.0mm-JWT-A2001WV2-03-		EA	1	NO	
3	9N010		Yes	10	1250000130	WIRE-SOLDER-ADEPO S60A--		kg	0,00001	NO	900000792A
3	9N020		Yes	10	1250000141	WIRE-SOLDER-12M/M--		kg	0,00003	NO	900000792A
3	9N025		No	10	1250000221	FLUX-RF800T3-LONCO		GL	0,003	NO	900000951B
3	9N030		No	10	1250000321	OIL HOUSE-THINNER LONCO RF800ADD--		GL	0,0005	NO	900000792A
3	9N050		Yes	10	1250000100	OIL HOUSE-SOLDER BAR ADEPTO S63A--		l	0,002	NO	900000943B
3	JK011		Yes	10	6627002000	JACK-PHONE---MSJ-035-12D PC BLUE-		EA	1	NO	
3	U1234		No	10	6832123400-01	PCB-AUDIO JACK BD-PTB-1234-01		EA	1	YES	900000866A
2	0		No	10	5114300006	CONTROL BD-POWER BD-H15AAU(9)-=-E-1-(K)-NON-BRAND		EA	1	NO	
3	02U04		Yes	10	1241000200	LABEL-DATE CODE-----	8340000485	EA	1	NO	
3	0C801		Yes	10	6328833419	CAP. X2-MPP-uF-0.33-275V-K--P=15-HJC		EA	1	YES	
3	0C802		Yes	10	6328810419	CAP. X2-MEF-uF-0.1-275V-K--P=15-HJC		EA	1	YES	
3	0C803		YES	10	6302122292	CAP. CD-pF-2200-250V-M-F-7.5-Y2-P/O		EA	1	YES	900000793A
3	0C803	51	Yes	10	6302122272	CAP. CD-pF-2200-250V-M-F-7.5-Y2-MAT-		EA	1	YES	900000793A
3	0C804		YES	10	6302122292	CAP. CD-pF-2200-250V-M-F-7.5-Y2-P/O		EA	1	YES	900000793A
3	0C804	51	Yes	10	6302122272	CAP. CD-pF-2200-250V-M-F-7.5-Y2-MAT-		EA	1	YES	900000793A
3	0C805		Yes	10	6312610149-01	CAP. ALU-uF-100-400V-NF-105C-18X30-RUBYCON(AXW)		EA	1	NO	900001382A
3	0C805	51	Yes	10	6312610149	CAP. ALU-uF-100-400V-F-105C-18x32-90deg		EA	1	NO	900001382A
3	0C828		YES	10	6302410262	CAP. CD-pF-1000-250V-M-F-P=10-SY1-P/O		EA	1	YES	900000793A
3	0C828	51	Yes	10	6302410242	CAP. CD-pF-1000-250V-M-F-10-SY1-MAT-		EA	1	YES	900000793A
3	0D801		YES	10	6417001400	DIODE-BRIDGE-KBP205G-2A/600V---TSC-		EA	1	NO	
3	0D809		Yes	10	6412020007	DIODE--SF34-3A/200V-T52--TSC		EA	1	NO	
3	0D810		YES	10	6412015817	DIODE-SWITCHING-SB360-3A/60V-T52--LITE-ON		EA	1	NO	
3	0F801		Yes	10	6851031550	FUSE-TIME LAG-3.15A/250V---LITTEL		EA	1	YES	
3	0G801		Yes	10	7748000190-0A	GROUNDING-CONNECTOR-MTS-C150AT-PHOSPHOR BRONZE	8440003377	EA	1	NO	
3	0I801		No	10	6442022020	IC-LINEAR-UC3842AM-8P-PDIP-LINFINITY(LMI)		EA	1	NO	900001527A
3	0I801	51	Yes	10	6442022010	IC-Linear-KA3842AE-S-8P-PDIP-FAIRCHILD		EA	1	NO	900001527A
3	0I802		Yes	10	6442014000	IC-Linear-LTV-817D-4P-PDIP-LITE ON		EA	1	YES	
3	0L802		Yes	10	6111336131	COIL CHOKE--uH-33-K-DRWW10x10LI1-		EA	1	NO	
3	0P802		Yes	10	6711100140-00	HARNESS-10P-70mm-2.0 1007#26-30/20		EA	1	NO	
3	0P803		Yes	10	6711060400-00	HARNESS-6P-2.0-100mm-1007#26--30/20		EA	1	NO	
3	0Q803		YES	10	6426008700	FET-N-CHNL-SSS4N60AS-2.3A/600V.--		EA	1	NO	

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
3	0R802		Yes	10	6201080012	THERMISTOR-OHM-8-3A-P=5-SCK-083-TKS		EA	1	YES	900000637B
3	0R803		Yes	10	6221210452	RES. MOF-KOHM-100-2W-J-HOR-		EA	1	NO	
3	0R805		Yes	10	6221210452	RES. MOF-KOHM-100-2W-J-HOR-		EA	1	NO	
3	0R806		Yes	10	6221333352	RES. MOF-KOHM-33-3W-J-HOR-		EA	1	NO	
3	0R811		Yes	10	6221112952	RES. MOF-OHM-1.2-1W-J-HOR-		EA	1	NO	
3	0R833		Yes	10	6221112252	RES. MOF-KOHM-1.2-1W-J-HOR-		EA	1	NO	
3	0T801		Yes	10	6138003000	LINE FILTER-TLF-1030-mH-10.5-ET-		EA	1	YES	
3	0T802		Yes	10	6131052300	XFRMER-POWER-TPW-1085-ER-28S-LSE		EA	1	YES	
3	9N005		Yes	10	1250000130	WIRE-SOLDER-ADEPO S60A--		kg	0,0007	NO	
3	9N015		Yes	10	1250000141	WIRE-SOLDER-12M/M--		kg	0,00075	NO	
3	9N020		No	10	1250000321	OIL HOUSE-THINNER LONCO RF800ADD--		GL	0,003	NO	
3	9N025		No	10	1250000221	FLUX-RF800T3-LONCO		GL	0,003	NO	900000952D
3	9N050		Yes	10	1250000100	OIL HOUSE-SOLDER BAR ADEPTO S63A--		l	0,003	NO	900000950C
3	9N066		No	10	1241000011	TAPE-PACKING-FILM STRETCH WRAP-W500mm x L1000m x T		RL	0,00006	NO	900001257A
3	9N080		Yes	10	1240000423	TAPE--50Mx508mmx0055mm-PCK-		RL	0,0002	NO	900001122B
3	9N081		Yes	10	6875000400	ADHESIVE-HOT MELT-521 UL94V-0-CHERNG TAY-		EA	0,004	YES	900001715A
3	F801A		Yes	10	6622050010	FUSE CLIP-FC-04 for D=5mm FUSE		EA	2	NO	
3	I008N		Yes	10	7150130081-0A	SCREW-BTYPE--Round-M3-8-Zn	8440003300	EA	1	NO	900000676C
3	P801A		Yes	10	6714030060-00	HARNESS--3P-200mm-1015#18(G/Y)/1617#22(WHT/BLK)--A		EA	1	NO	
3	Q803C		Yes	10	1250000520	HEAT SINK-COMPOUND---		kg	0,00005	NO	
3	Q803K		Yes	10	1250000415	OIL HOUSE-VA-450 SCREW LOCKING--		kg	0,00002	NO	900001146B
3	Q803M		Yes	10	7746402560-0A	HEAT SINK-POWER BD---		EA	1	NO	
3	VR801		Yes	10	6245102003	VARIABLE-KOHM-1-0.3W-TA--6D--		EA	1	NO	
3	0		No	10	5714300006	AI-POWER BD-H15AAU(9)-=-E-1-(K)-NON-BRAND		EA	1	NO	
4	0C806		Yes	30	6336510305	CAP. CD-uF-0.01-1000V-M-T--Z5U-		EA	1	NO	900001281G
4	0C807		Yes	30	6311347045	ALUMINATOR-UF-47-25V-T-105C-5*11-		EA	1	NO	
4	0C809		Yes	10	6338522115	CAP. CD-pF-220-1000V-K-T--X7R-		EA	1	NO	900001353D
4	0C810		Yes	30	6338110485	CAP. CD-UF-0.1-50V-Z-T--Y5V-		EA	1	NO	
4	0C811		Yes	30	6335110215	CAP. CD-PF-1000-50V-K-T--Y5P-		EA	1	NO	
4	0C812		Yes	30	6338110485	CAP. CD-UF-0.1-50V-Z-T--Y5V-		EA	1	NO	
4	0C813		Yes	30	6335110315	CAP. CD-UF-0.01-50V-K-T--Y5P-		EA	1	NO	
4	0C814		Yes	30	6311510045	ALUMINATOR-uF-10-50V-T-105C-5x11-		EA	1	NO	
4	0C815		Yes	30	6356110455	CAP. MEM-uF-0.1-50V-J-T--MATSUSHITA		EA	1	NO	
4	0C816		Yes	30	6335110215	CAP. CD-PF-1000-50V-K-T--Y5P-		EA	1	NO	
4	0C817		Yes	30	6311347145	ALUMINATOR-uF-470-25V-T-105C-10x16-		EA	1	NO	

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
4	0C818		Yes	30	6311347145	ALUMINATOR-uF-470-25V-T-105C-10x16-		EA	1	NO	
4	0C820		Yes	30	6338110485	CAP. CD-UF-0.1-50V-Z-T--Y5V-		EA	1	NO	
4	0C821		Yes	30	6335110215	CAP. CD-PF-1000-50V-K-T--Y5P-		EA	1	NO	
4	0C822		Yes	30	6311347195	CAP. ALU-uF-470-25V-T-105C-10X16-KF SERIES		EA	1	NO	
4	0C824		Yes	10	6311210245	ALUMINATOR-uF-1000-16V-T-105C-10x20-		EA	1	NO	
4	0C826		Yes	30	6338110485	CAP. CD-UF-0.1-50V-Z-T--Y5V-		EA	1	NO	
4	0C827		Yes	30	6356110455	CAP. MEM-uF-0.1-50V-J-T--MATSUSHITA		EA	1	NO	
4	0C831		Yes	30	6311322045	ALUMINATOR-uF-22-25V-T-105C-5x11-		EA	1	NO	
4	0D803		Yes	20	6412007927	DIODE--FUF4006AMP-1A/800V-T52--		EA	1	NO	

4	0D804		Yes	20	6412012317	DIODE--FUF4005AMP-1A/600V-T52-75nS-		EA	1	NO			
4	0D806		Yes	20	6412001707	DIODE-SWITCHING-1N4148 T-72--T52--ROHM-		EA	1	NO			
4	0I803		Yes	30	6442001345	IC-LINEAR-KA431AZTA-3PIN-TO-92-FAIRCHILD		EA	1	NO			
4	0J801		Yes	10	6700060000	JUMPER WIRE-		kg	0,00009	NO			
4	0Q806		Yes	30	6423000045	TRANSISTOR-PNP-2SA733P-T-TAPING-NEC-		EA	1	NO			
4	0Q806	51	Yes	30	6423000205	TRANSISTOR-PNP-KSA733C-G-TA--FAIRCHILD-		EA	1	NO			
4	0R801		YES	10	6221147457	RES. MOF-KOHM-470-1W-J-AT52-		EA	1	NO			
4	0R807		Yes	20	6212147954	RES. CF-OHM-4.7-1/4W-J-T26-MINI		EA	1	NO			
4	0R808		Yes	20	6212151354	RES. CF-KOHM-51-1/4W-J-T26-MINI		EA	1	NO			
4	0R810		Yes	20	6212139254	RES. CF-KOHM-3.9-1/4W-J-T26-MINI		EA	1	NO			
4	0R812		Yes	20	6212120354	RES. CF-KOHM-20-1/4W-J-T26-MINI		EA	1	NO			
4	0R813		Yes	20	6212122157	RES. CF-OHM-220-1/4W-J-T52-MINI		EA	1	NO			
4	0R814		Yes	20	6212147054	RES. CF-OHM-47-1/4W-J-T26-MINI		EA	1	NO			
4	0R815		Yes	20	6212110257	RES. CF-KOHM-1-1/4W-J-T52-MINI		EA	1	NO			
4	0R817		Yes	20	6212147254	RES. CF-KOHM-4.7-1/4W-J-T26-MINI		EA	1	NO			
4	0R818		Yes	20	6212151354	RES. CF-KOHM-51-1/4W-J-T26-MINI		EA	1	NO			
4	0R819		Yes	20	6212151254	RES. CF-KOHM-5.1-1/4W-J-T26-MINI		EA	1	NO			
4	0R820		Yes	20	6212110254	RES. CF-KOHM-1-1/4W-J-T26-MINI		EA	1	NO			
4	0R823		Yes	20	6212127154	RES. CF-OHM-270-1/4W-J-T26-MINI		EA	1	NO			
4	0R824		Yes	20	6212127254	RES. CF-KOHM-2.7-1/4W-J-T26-MINI		EA	1	NO			
4	0R825		Yes	20	6212110354	RES. CF-KOHM-10-1/4W-J-T26-MINI		EA	1	NO			
4	0R826		Yes	20	6212110254	RES. CF-KOHM-1-1/4W-J-T26-MINI		EA	1	NO			
4	0R827		Yes	20	6212120254	RES. CF-KOHM-2-1/4W-J-T26-MINI		EA	1	NO			
4	0R832		Yes	20	6212151254	RES. CF-KOHM-5.1-1/4W-J-T26-MINI		EA	1	NO			
4	U1218		No	10	6832121800-03	PCB-POWER BD-PTB-1218-03	8812180000	EA	1	YES	900000615B		
4	ZD801		YES	20	6414180074	DIODE-ZENER-GDZJ18B-T/B--T26--		EA	1	NO			

LITE-ON TECHNOLOGY CORP

XXBO MR001 0 BOM LIST BY CKT-ID

Blo ck Nu mber: 45941 4202 3 Desc:MONITOR- LCD-H15AAC-=-E-2-(C)-CARREFOUR Plan _Leve l:

Cate gory From: Approve:Both Repo rt Da te:22-JUL-2002 19:46

To: Org:SJP Pag e: 18 OF 18

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drawing No	Uom	Quantity	SFty	ECN Number
1	0		No	20	5112400816	PACKING ASS'Y-H15AAC-=-E-2-(C)-CARREFOUR		EA	1	NO	
2	00PWR		Yes	20	6716000200	CABLE-POWER --1800mm -BLACK-EUROPE		EA	1	YES	
2	01P11		Yes	20	7749205467-0A	CARTON-NON BRAND-H15AAU--MERCURY-1320sets-	8340002886	EA	1	NO	
2	01P21		No	20	7749103020-0B	CUSHION-FOAM-EPS-15"MERCURY-1320sets-R&L-LITEON	8340002887	PR	1	NO	
2	01P31		Yes	20	7749000820-0B	BAG-PE-ORDINARY-ALL MODEL (LCD)-L680xW550xT0.03	8340001542	EA	1	NO	
2	01P32		Yes	20	7749000200-0D	BAG-PE-ORDINARY-ALL MODEL-L250xW110xT0.04	8440000038	EA	1	NO	
2	01P33		Yes	20	7740100200	CLAMP-CABLE-WIRING CABLE TIE-NYLON-NATURE-250-	8440000046	EA	1	NO	
2	01P41		Yes	20	1240000406	TAPE-PACKING-30"WX914MLX0065--		lb	0,002	NO	
2	01P43		No	20	7749600200-0A	TAPE-MASKING-PACKING-25mm(w)x45m-LITE-ON	8440004216	RL	0,002	NO	900001094A
2	01P51		Yes	20	7749500170-0A	PALLET-FOUR-WAY-L1395XW905XH115-NEC 15" LCD	8340002690	EA	0,01591	NO	
2	01P52		Yes	20	7749500600-0A	PALLET--905x605x115mm-		EA	0,00076	NO	
2	01P53		No	20	7749401300-0A	BOARD-PAPER BOARD-1300x880x4mm	8340000797	EA	0,03182	NO	
2	01P54		No	20	7749401590-0A	BOARD-CORNER PAPER-850x50x3mm		EA	0,03333	NO	
2	01P55		No	20	1240000302	OIL HOUSE-TAPE-STRAPPING--		EA	0,001	NO	
2	01P56		No	20	1241000011	TAPE-PACKING-FILM STRETCH WRAP-W500mm x L1000m x T		RL	0,002	NO	
2	01P57		No	20	7749401640-0A	BOARD-PAPER BOARD-850X550X4mm	8340002657	EA	0,00152	NO	
2	01P78		Yes	20	7735419690	LABEL-BARCODE LABEL -MITSUBISJI-ALL--WHITE-90*30	8440002835	EA	2	NO	
2	02B01		Yes	20	7735426010-0A	LABEL-MODEL LABEL-LITE-ON--H15AAC-#4590-90x60mm	8440004185	EA	1	YES	900001304A
2	0AUDA		Yes	20	6710010080	CABLE--D3.5PLUGx2AUDIO-1800mm-GRAY-		EA	1	YES	
2	0T003		No	1	8340002887	TOOLING-LCD-CUSHION-FOAM-MERCURY-H15AAU		EA	1	NO	
2	0Y002		Yes	20	7730202433-0B	CARD-SET UP SHEET-LITEON-15"LCD MONITOR---		EA	1	NO	900001309P
2	9N050		Yes	20	1250000600	OIL HOUSE-CLEANER NAPHTHA--		I	0,007	NO	
2	0Y001		Yes	20	7730302546-0A	MANUAL-MANUAL ASS'Y-LITE-ON-H15AAC--MECURY-E,F,G,S		EA	1	NO	
3	0Y0A1		No	1	7730113667-0A	MANUAL-MANUAL-LITE-ON-H15AAC--MECURY-E,F,G,S,I		EA	1	NO	
3	0Y0B1		No	1	7730202401-0A	DISKETTE-NON BRAND-J15AAC-E,F,D,S,I		EA	1	NO	